



Radiation Tests: LTC6241 Op-Amp

- SEE tests performed at a flux of 2.4×10^8 p/cm²/s
 - The monitored parameters were bias current, offset voltage, output voltage drift, and Single Event Transients (SET) on output voltages
 - No significant change was observed in parameters
 - Some SETs were observed, with small amplitude (~50 mV) and short duration (~100 ns), but they have no effect on brick's performance
- **The chips passed the SEE tests successfully**
- Performed at 3 Gy/h followed by annealing, **TID tests showed no significant change in parameters**
- **NIEL tests showed no change in parameters**

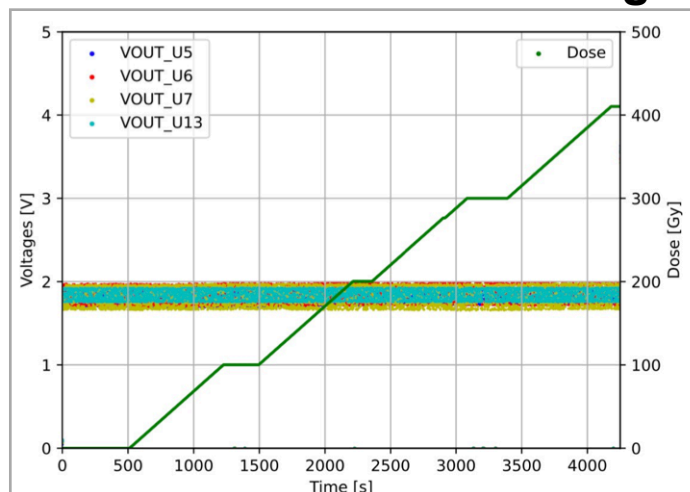

Output voltage in LTC6241

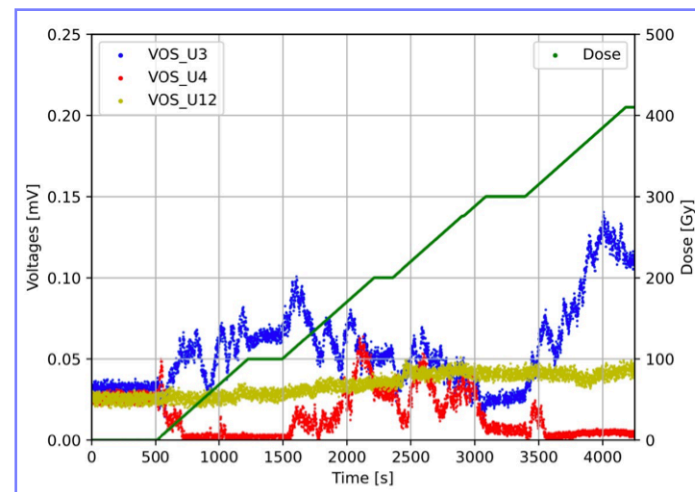

Offset voltage in LTC6241