


Radiation Tests: SI8920 Isolation Amplifier (2)



- After further tests at CHARM and PSI, we found that the chip has a stable behavior at a specific voltage range
 - Having an input voltage below 100 mV, **the chip passed SEE and TID tests**
- It was decided to use SI8920 for the production bricks, and ensuring that the circuits only allow the input voltage of this chip to be a maximum of 100 mV
 - A few resistors on the design were changed to ensure this voltage range is not exceeded

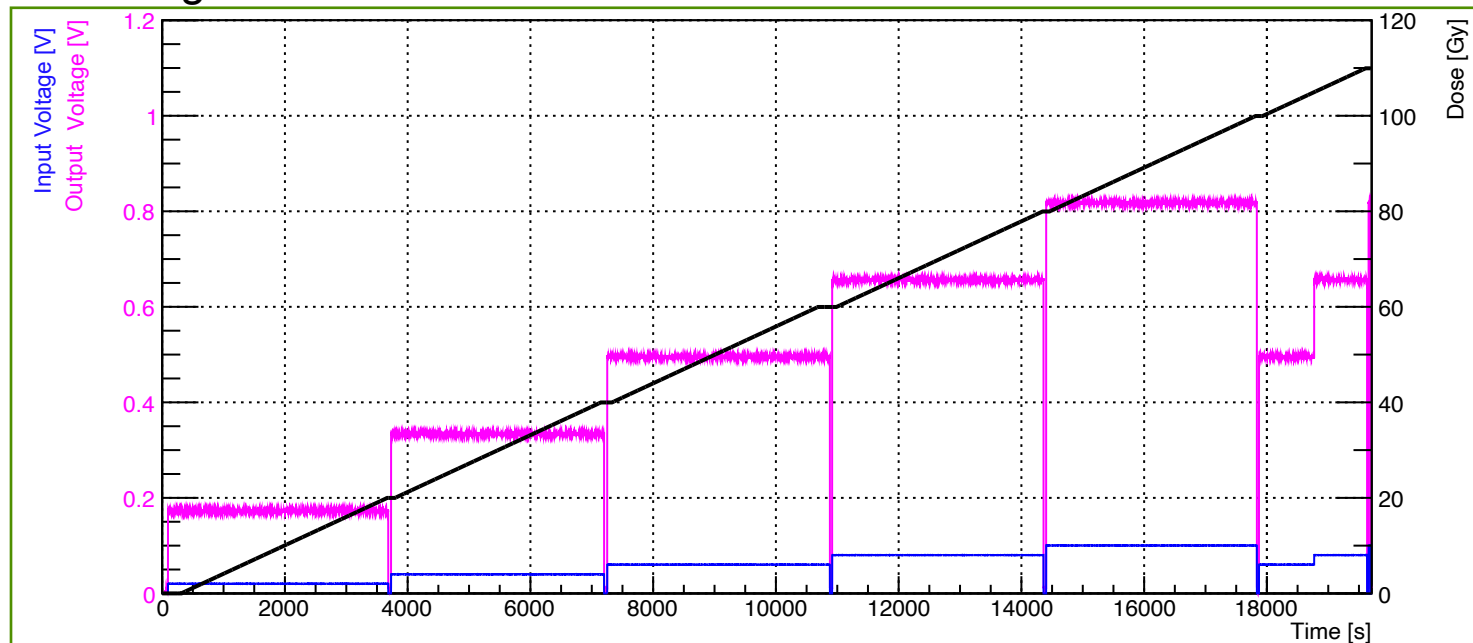

Stable behavior of SI8920 at input voltage below 100 mV at PIF