


Raspberry Pi Pico

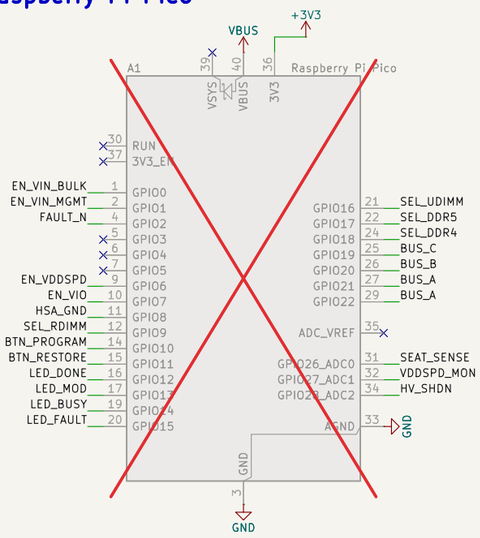


Module rails (VIN_BULK, VIN_MGMT, 2.5 V)

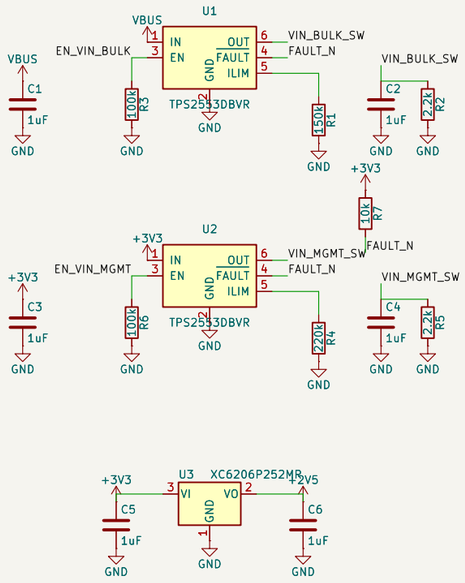


VDDSPD / VIO switches

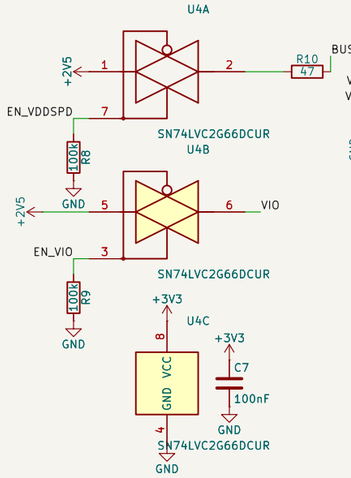


Socket (half DDR5 DIMM socket)

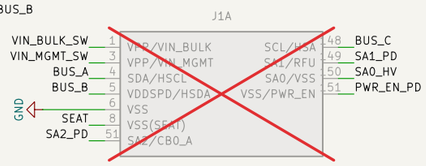




Contacts 1–69 / 145–213 of a cut Amphenol DDR504112805K.
DDR4 modules are inserted rotated 180 deg.
Unused contacts (J1B, J1C) are soldered but unconnected.


Unused socket contacts

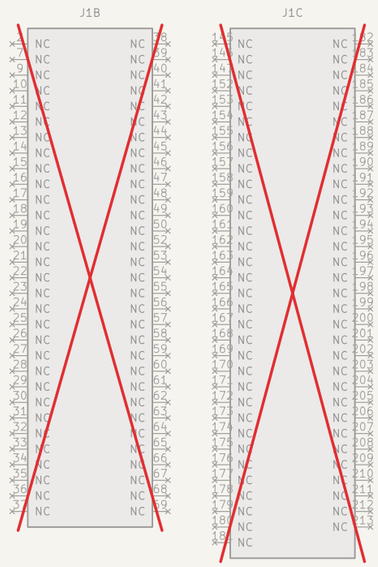


DDR4 SA0 high voltage (8.5 V, only during SWPn/CWP)

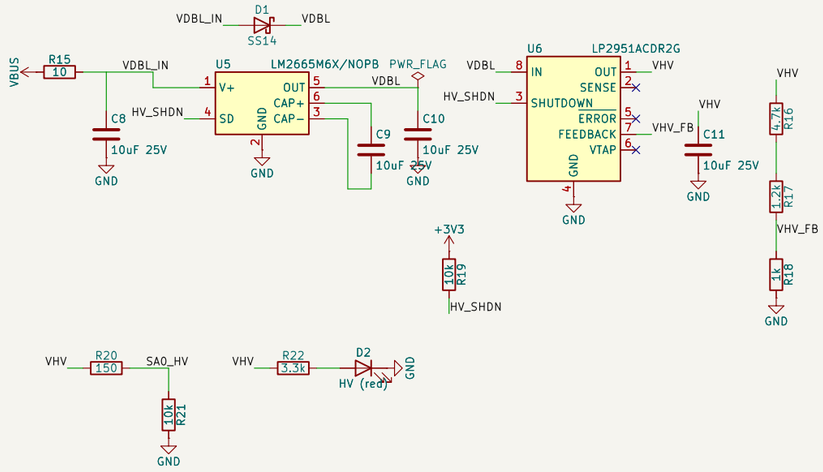


I2C pull-ups / HSA to GND



User interface

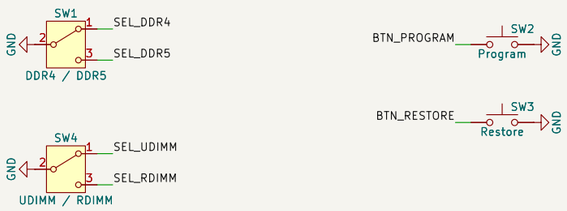

SW1 / SW4: top-actuated SPDT, COM (pin 2) to GND.
Selected throw pulls its line low and lights its LED.

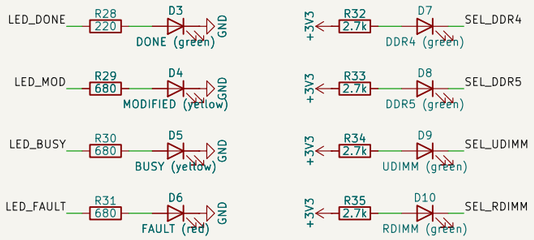

Sheet: /	
File: spd-programmer.kicad_sch	
Title:	
Size: A3	Date:
KiCad E.D.A. 10.0.7	Id: 1/1