


Symbol	Parameter	Conditions		Min	Typ	Max	Unit
t _{su} (RX)	Data input setup time	Slave mode		2.5	-	-	ns
t _h (RX)	Data input hold time	Master mode		0.5	-	-	
t _h (RX)		Slave mode		1	-	-	
t _v (TX)	Data output valid time	Slave mode	2.7 V ≤ V _{DD} ≤ 3.6 V	-	13.5	18	
		Master mode	2.7 V ≤ V _{DD} ≤ 3.6 V	-	2	2.5	
t _h (TX)	Data output hold time	Slave mode		9	-	-	
t _h (TX)	Data output hold time	Master mode		0.5	-	-	


1. T_{ker} is the `usart_ker_ck_pres` clock period.

Figure 30. USART timing diagram in SPI master mode

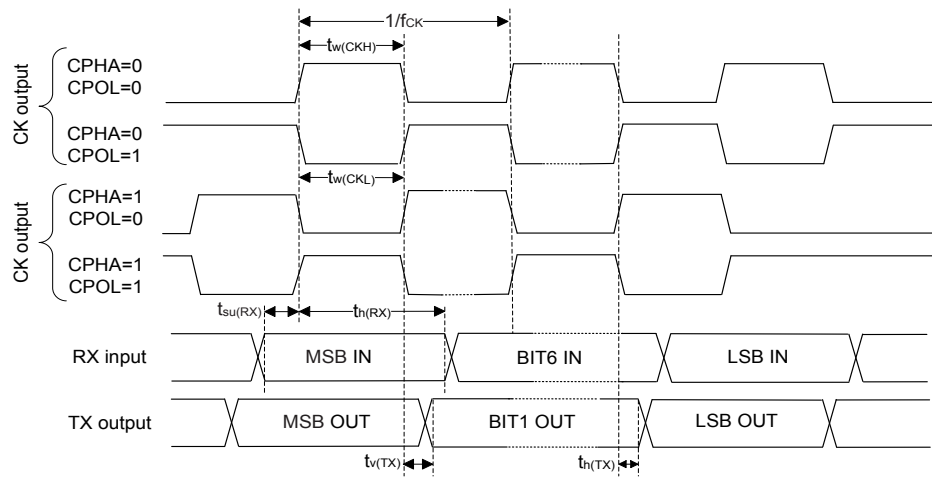

DT65386V2

Figure 31. USART timing diagram in SPI slave mode

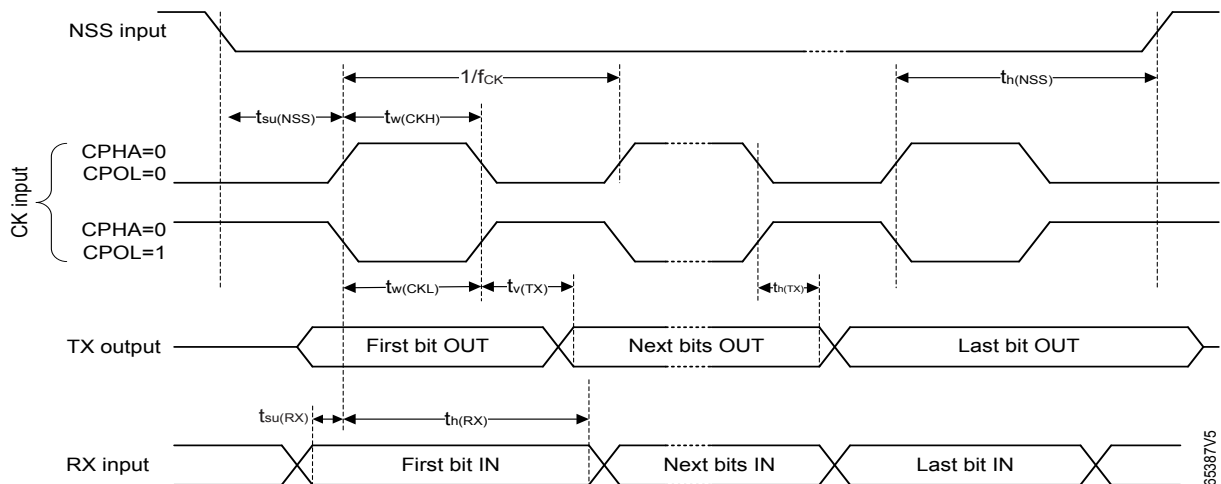

DT65387V5