


Symbol	Parameter	Conditions	Min	Typ	Max	Unit
$V_{HSE_ext_PP}^{(2)}$	OSC_IN peak-to-peak amplitude	Analog mode (HSEBYP = 1, HSEEXT = 0)	0.2	-	$2/3 V_{DD}$	V
V_{HSE_ext}	OSC_IN input range		0	-	V_{DD}	
$t_{r(HSE)}, t_{f(HSE)}$	OSC_IN rise and fall time		$0.05 / f_{ext_ext}$	-	$0.3 / f_{ext_ext}$	ns


1. There is no specified rise and fall time for a digital input signal, but the V_{HSEH} and V_{HSEL} conditions must be fulfilled.
2. The DC component of the signal must ensure that the signal peaks are located between V_{DD} and V_{SS} .

Figure 14. AC timing diagram for high-speed external clock source (digital mode)

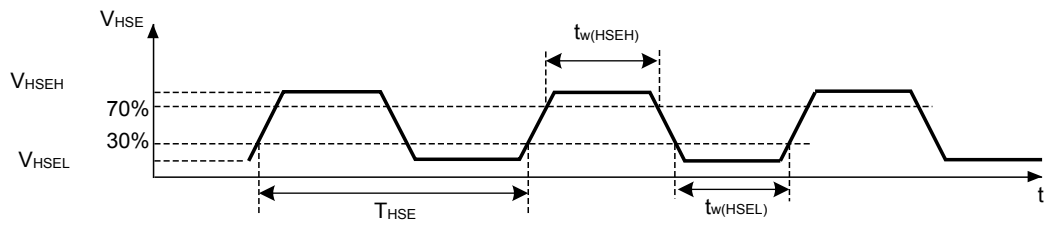

DT67850V3

Figure 15. AC timing diagram for high-speed external clock source (analog mode)

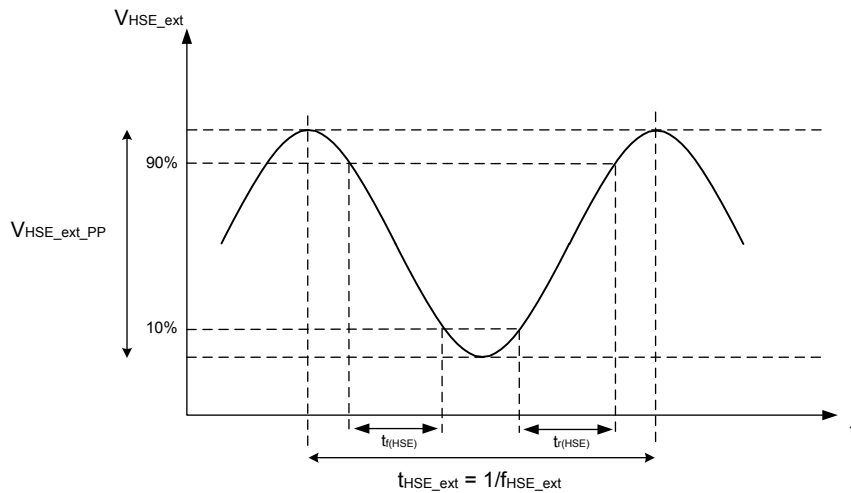

DT71538V1