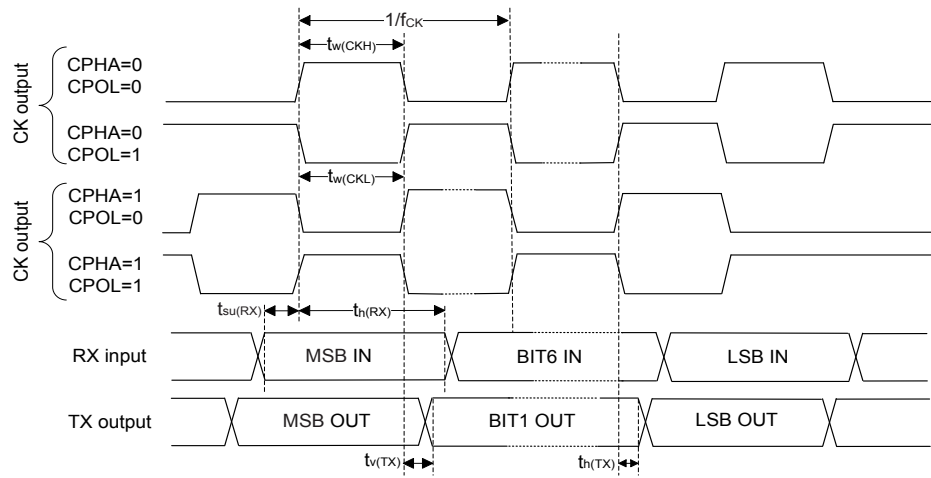
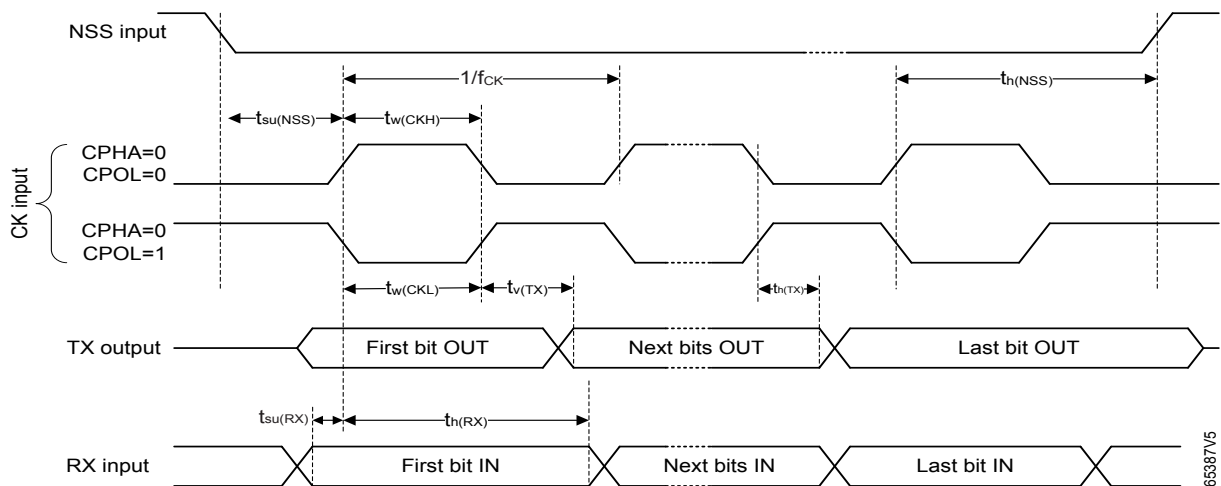


Figure 35. USART timing diagram in SPI master mode


DT65386V2

Figure 36. USART timing diagram in SPI slave mode


DT65387V5

5.3.27 SPI characteristics

Unless otherwise specified, the parameters given in [Table 68](#) are derived from tests performed under the ambient temperature, f_{PCLKx} frequency and supply voltage conditions summarized in [Table 16](#).

- Output speed set to $OSPEEDR[1:0] = 11$
- Capacitive load $C_L = 30$ pF
- Measurement points done at $0.5 \times V_{DD}$ level
- I/O compensation cell activated

Refer to [Table 46. I/O static characteristics](#) for more details on the input/output alternate function characteristics (NSS, SCK, MOSI, MISO for SPI).

Table 68. SPI characteristics

Evaluated by characterization - Not tested in production.

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
f_{SCK}	SPI clock frequency	Master mode, $2.7\text{ V} \leq V_{DD} \leq 3.6\text{ V}$	-	-	72	MHz