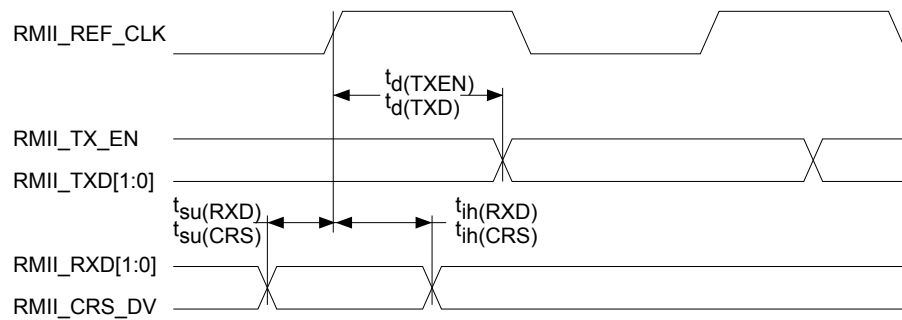
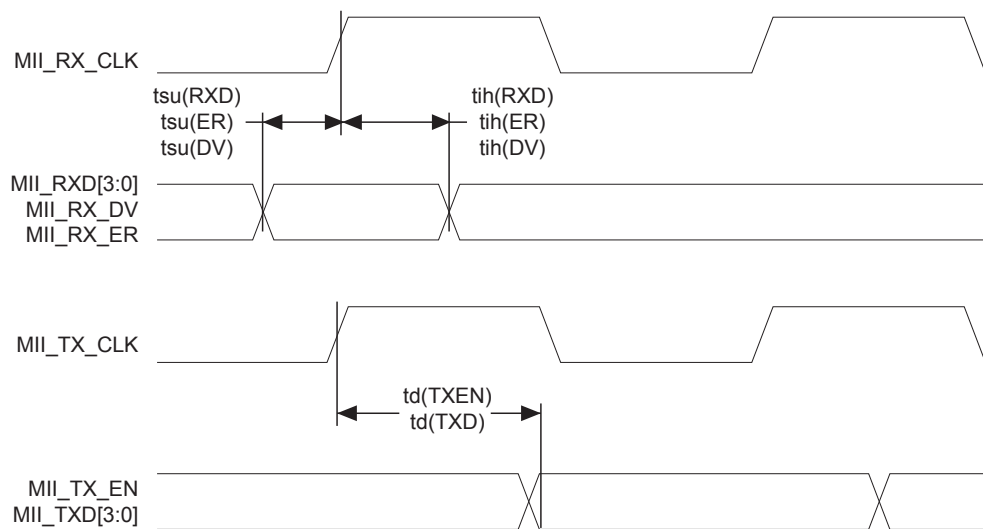


Symbol	Parameter	Min	Typ	Max	Unit
$t_{ih}(DV)$	Data valid hold time	1	-	-	ns
$t_{su}(ER)$	Error setup time	1.5	-	-	
$t_{ih}(ER)$	Error hold time	1.5	-	-	
$t_d(TXEN)$	Transmit enable valid delay time	7.5	9.5	14	
$t_d(TXD)$	Transmit data valid delay time	7	10.5	16	

Figure 40. RMII timing diagram


DT15667V1

Figure 41. MII timing diagram


DT15668V1