
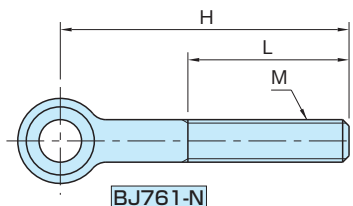


# BJ761-N, BJ761-A


# ヒンジ ボルト

標準 在庫品 

**IMAO**



BJ761-N

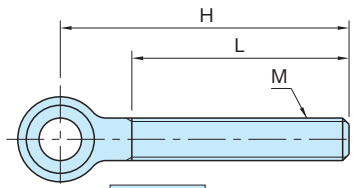

BJ761-A

本体  
S45C  
焼入焼戻  
四三酸化鉄皮膜

BJ761-N BJ761-A

| 標準タイプ        |    |       |       | 全ネジタイプ       |     |       |       | M        | d<br>(+0.2)<br>0 | H   | W<br>(-0.2)<br>0 | D  |
|--------------|----|-------|-------|--------------|-----|-------|-------|----------|------------------|-----|------------------|----|
| 品番           | L  | 質量(g) | 価格    | 品番           | L   | 質量(g) | 価格    |          |                  |     |                  |    |
| BJ761-06001N | 20 | 13    | 1,100 | —            | —   | —     | —     | M 6×1    | 6                | 35  | 7                | 14 |
| BJ761-06002N | 25 | 16    | 1,170 | BJ761-06002A | 40  | 16    | 1,420 |          |                  | 50  |                  |    |
| BJ761-08011N | 20 | 25    | 1,210 | —            | —   | —     | —     |          |                  | 35  |                  |    |
| BJ761-08001N | 30 | 30    | 1,210 | BJ761-08001A | 37  | 30    | 1,420 | M 8×1.25 | 8                | 50  | 9                | 18 |
| BJ761-08002N |    | 40    | 1,210 | BJ761-08002A | 62  | 40    | 1,560 |          |                  | 75  |                  |    |
| BJ761-10011N |    | 45    | 1,360 | —            | —   | —     | —     |          |                  | 50  |                  |    |
| BJ761-10001N | 45 | 60    | 1,360 | BJ761-10001A | 60  | 60    | 1,700 | M10×1.5  | 10               | 75  | 12               | 20 |
| BJ761-10002N |    | 80    | 1,360 | BJ761-10002A | 85  | 80    | 1,840 |          |                  | 100 |                  |    |
| BJ761-12011N |    | 73    | 1,560 | —            | —   | —     | —     |          |                  | 50  |                  |    |
| BJ761-12001N | 50 | 95    | 1,560 | BJ761-12001A | 57  | 95    | 1,980 | M12×1.75 | 12               | 75  | 14               | 25 |
| BJ761-12002N |    | 120   | 1,980 | —            | —   | —     | —     |          |                  | 100 |                  |    |
| BJ761-12003N |    | 125   | 2,300 | BJ761-12003A | 107 | 125   | 2,400 |          |                  | 125 |                  |    |
| BJ761-16011N | 60 | 210   | 2,400 | BJ761-16011A | 80  | 210   | 3,100 | M16×2    | 16               | 100 | 17               | 32 |
| BJ761-16001N |    | 250   | 2,400 | —            | —   | —     | —     |          |                  | 125 |                  |    |
| BJ761-16002N |    | 300   | 2,400 | BJ761-16002A | 130 | 300   | 3,400 |          |                  | 150 |                  |    |
| BJ761-20011N | 55 | 340   | 3,400 | BJ761-20011A | 75  | 340   | 4,100 | M20×2.5  | 18               | 100 | 22               | 40 |
| BJ761-20001N | 65 | 400   | 3,400 | —            | —   | —     | —     |          |                  | 125 |                  |    |
| BJ761-20002N |    | 485   | 3,700 | BJ761-20002A | 125 | 485   | 4,500 |          |                  | 150 |                  |    |

## 使用例・使用方法

