

Product Specifications for RFQ

Type Instruments

Model FI-1DIN/FI-1.5DIN
(temporary name)

Date		
Department		
Approved	Checked	PIC

Table of contents

1. SCOPE 3

2. Overview of the products 3

3. Examples of display 3

4. SYSTEM DIAGRAMS..... 4

Draft

1. SCOPE

This document is to show the overview of requirements of new Instruments as a replacement of FI-70/RD-33. The required systems have the same capabilities as are supported by FI-70 and RD-33. Two types of displays are needed, 1-DIN (110mm x 110mm) and 1.5DIN (110mm x 220mm)

1DIN type



1.5 DIN type (touch screen)



2. Overview of the products


Basic Specifications

- Two types of display: 1 DIN type, and 1.5 DIN type.
- LCD: Max size to fit each of 1 DIN and 1.5DIN
- These Instruments supports the same functions as FI-70
- Interface: NMEA2000 only
- Power supply 12/24 vdc (when installed as one of NMEA 2000 devices, the power should be taken from NMEA2000 bus. When installed independently, the power can be taken from ships main 12/24 vdc.
- The back case should be "Hole Saw" type for 1DIN type. 1.5DIN type can be flush-mounted like Garmin GHC50.


Hole Saw mounting for 1DIN type




Flush mounting for 1.5DIN type

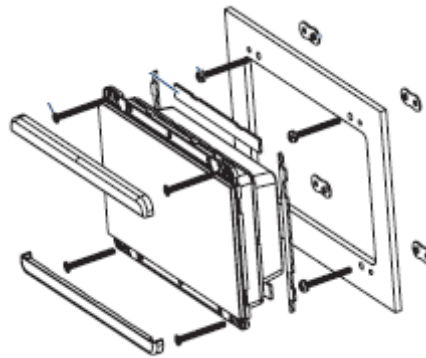

3. Examples of display (same as FI70 and RD33)

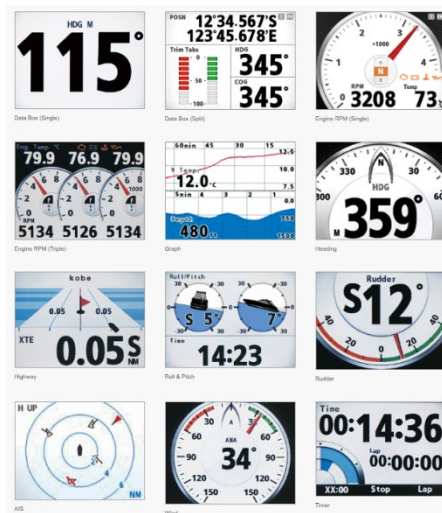

4. SYSTEM DIAGRAMS

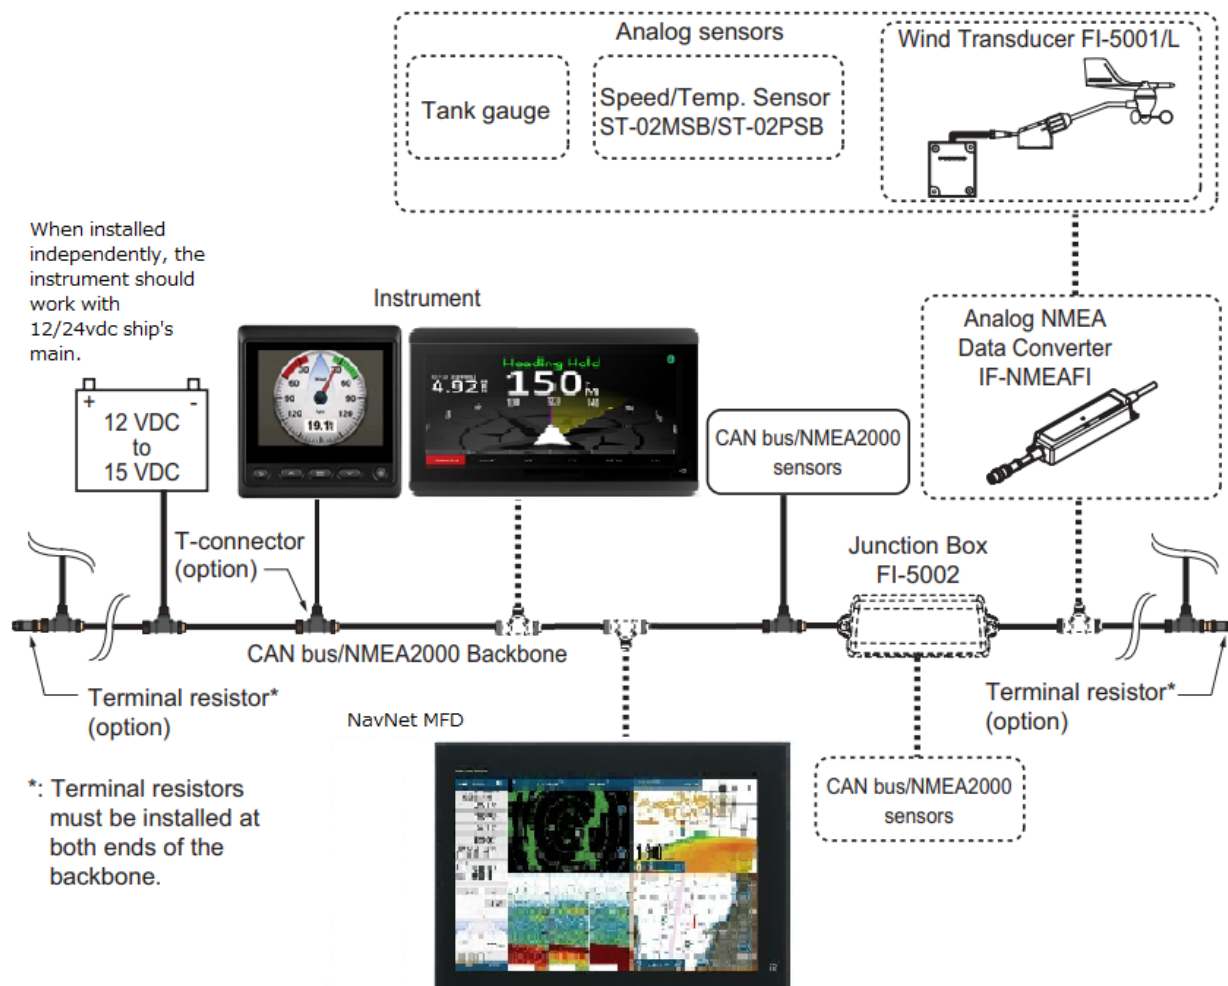

Basic Specifications

Equipment List	Standard
LCD size	- Instrument display FI-xxx (1DIN) or FI-xxx(1.5DIN) - Installation materials incl NMEA2000 cable
Interface	As big as possible
Power supply	- NMEA2000 (PGNs are the same as FI70 and RD-33) 12/24 10.8-15.6VDC (12VDC -10%/+30%) for NMEA 2000 bus and 12 VDC ship's main 24VDC (24VDC -10%/+30% of ship's main)
Waterproofness	IPX67 (black box and handsets)
Environmental std	IEC60945
RoHS	Need to comply
Size(W×H×D), Weight	1DIN type and 1.5DIN type