



POWER & NMEA2000

Input: 9~16V (Max 20.8V)


전원단 전체적으로 수정 (6/12)

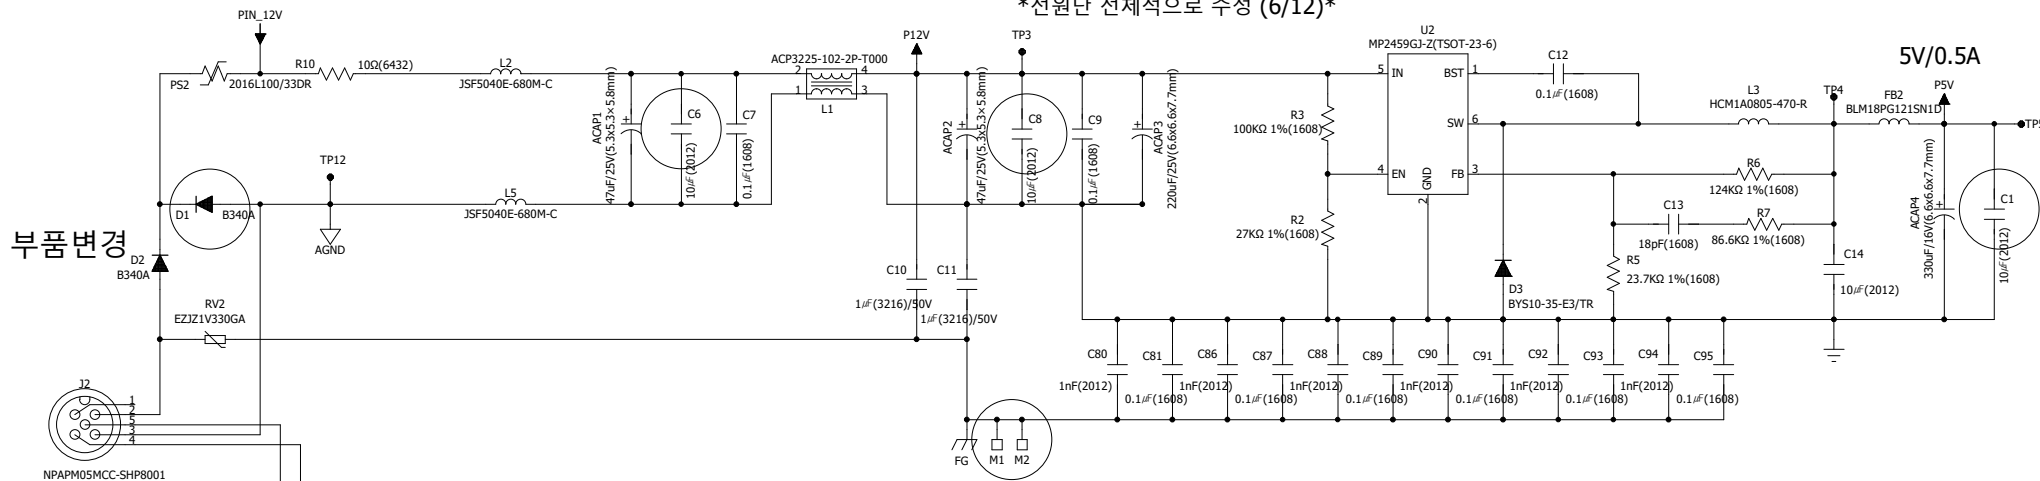


CAN

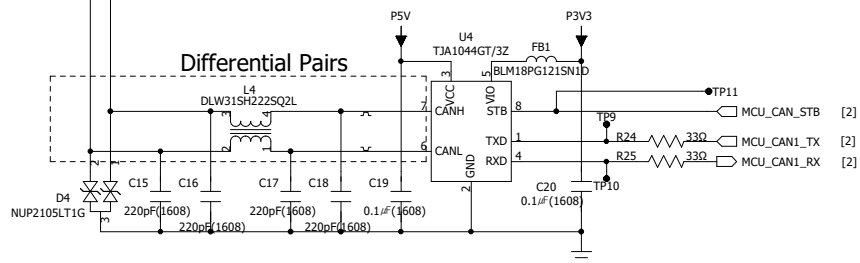

3.3V LDO

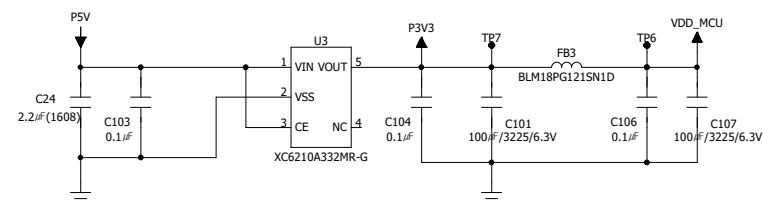


SCREW HOLE




COMPANY: EOTRONIX		
TITLE: POWER/CAN		
DESIGNED:	DRAWING DATE:	REV:
CHECKED:	2023-10-12	v2.0
APPROVED:	SCALE: A2	SHEET: 1 OF 6

(핀타입으로 변경 필요)

SDRAM (16MB)

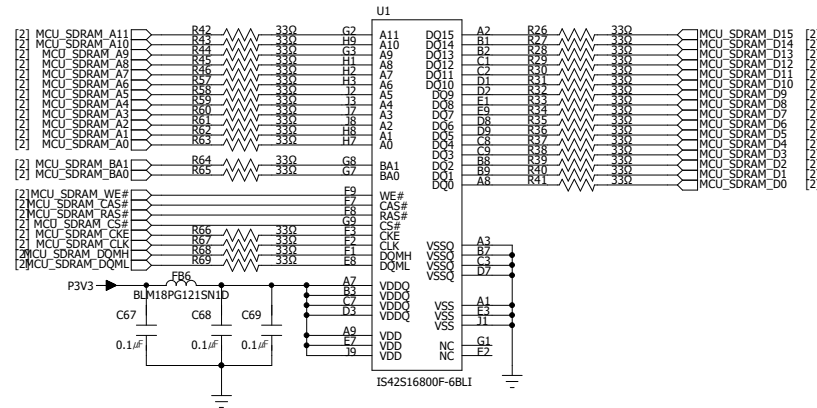


Flash Memory(SPI NAND Flash/1Gb)

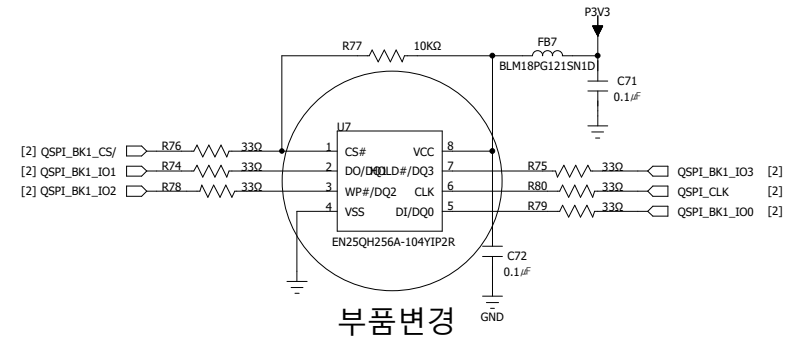

부품변경

RGB LCD(4인치/5인치)

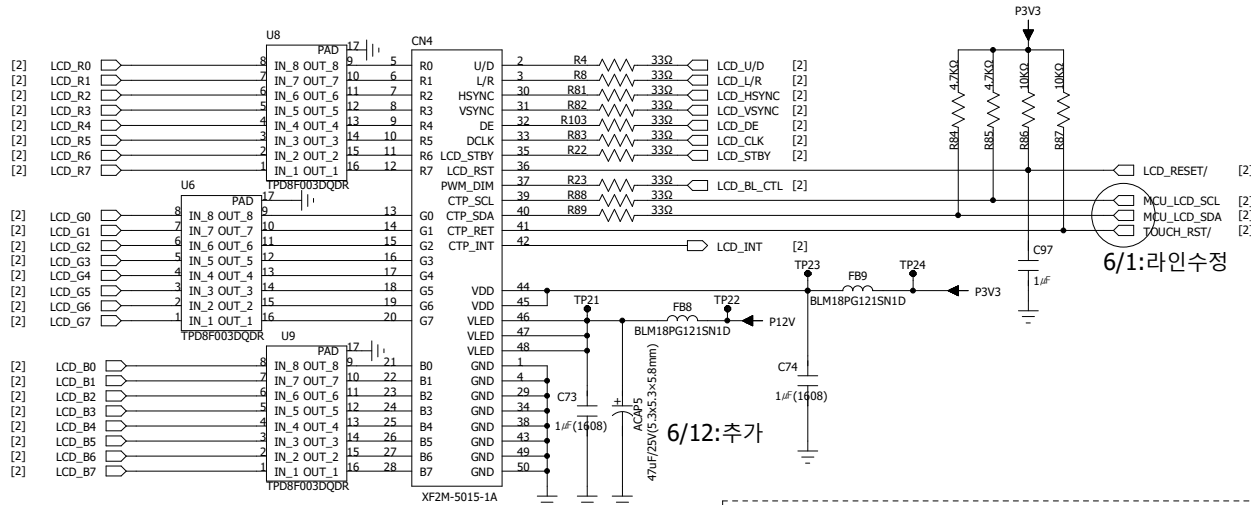

6/1:라인수정

6/12:추가

[4인치 LCD]

- U/D, L/R, STBY pin 사용안함(pin2, 3, 35)
- 터치 기능 사용안함(pin39~42)

COMPANY:		EOTRONIX	
TITLE:		MEMORY/LCD	
DESIGNED:	DRAWING DATE:	REV:	
CHECKED:	2023-10-12	v2.0	
APPROVED:	SCALE: A2	SHEET: 3 OF 6	

D

C

B

A


D

C


B

A


NMEA0183

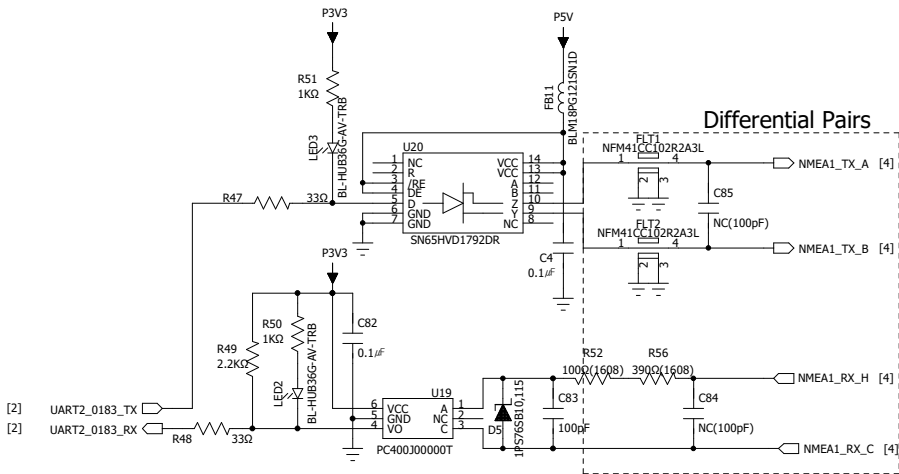

Input: 9~16V (Max 32V)

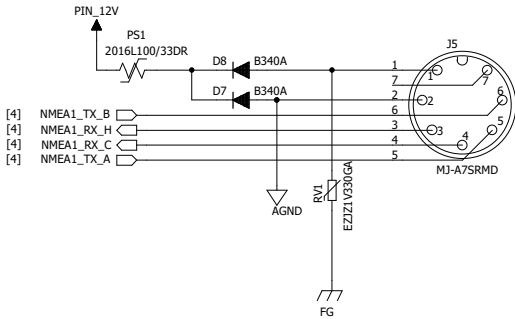

BUZZER

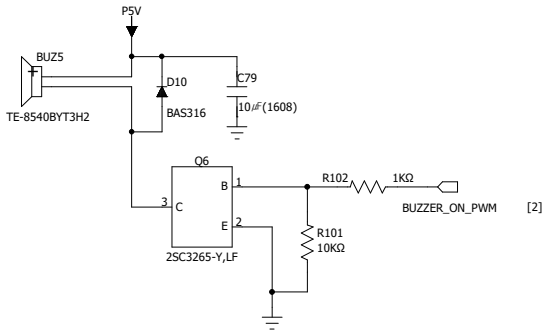

COMPANY: EOTRONIX		
TITLE: NMEA0183/BUZZER		
DESIGNED:	DRAWING DATE:	REV:
CHECKED:	2023-10-12	v2.0
APPROVED:	SCALE: A2	SHEET: 4 OF 6

D

C

B

A

D

C

B

A

6

5


4

3


2

1


SWD

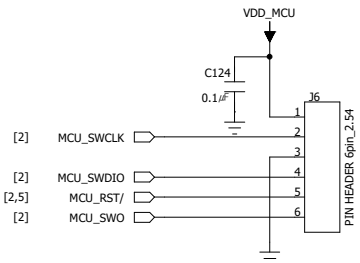


DEBUG



RESET



BOOT



COMPANY: EOTRONIX		
TITLE: DEBUG		
DESIGNED:	DRAWING DATE:	REV:
CHECKED:	2023-10-12	v2.0
APPROVED:	SCALE: A2	SHEET: 5 OF 6