



CAN

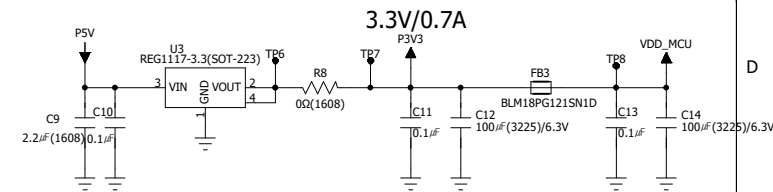

KEY : POWER ON/OFF

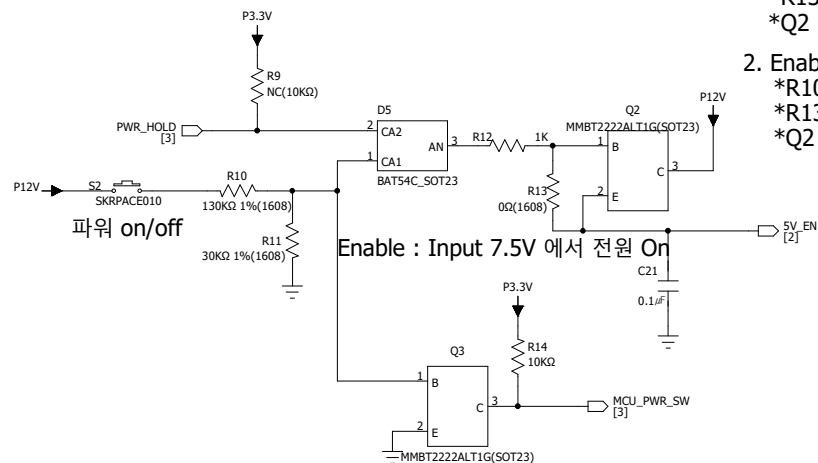

1. Enable : Input 7.5V 에서 전원 On
*R10 : 130K
*R13 : 0R
*Q2 : NC
2. Enable : Input 7.5V 에서 전원 On (Q2사용)
*R10 : 91K
*R13 : NC
*Q2 : 사용

COMPANY:				EOTRONIX			
TITLE:				POWER			
DESIGNED:			DRAWING DATE:			REV:	
CHECKED:			2023-03-22			r0.1	
APPROVED:			SCALE: A2		SHEET: 2 OF 5		

D

C

B

A


D

C


B

A


MCU

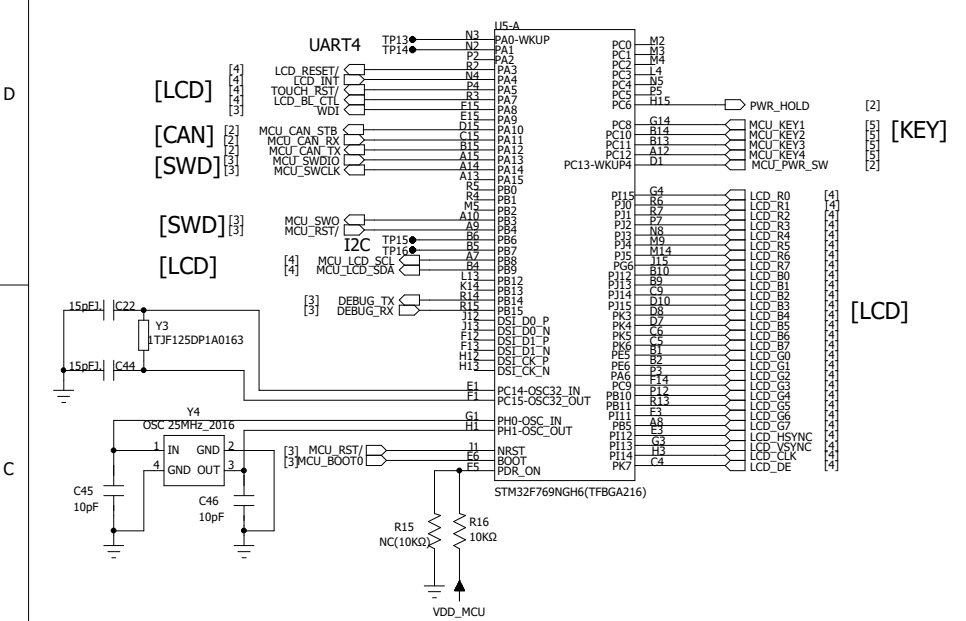


SWD

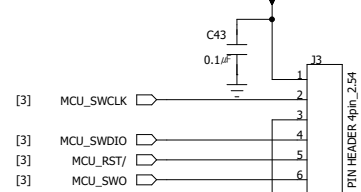


DEBUG

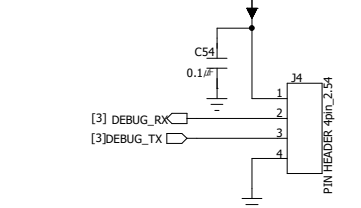



BOOT

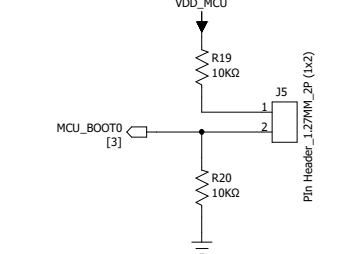

RESET

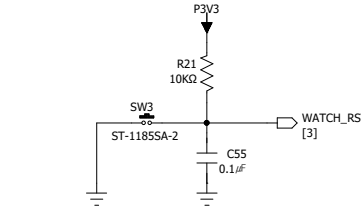


* WATCH DOG *
(사용결정필요)

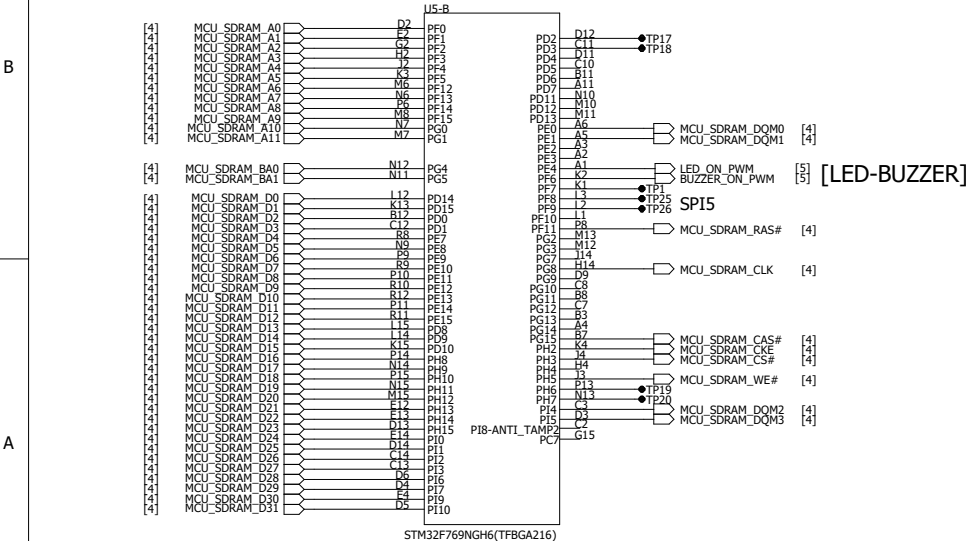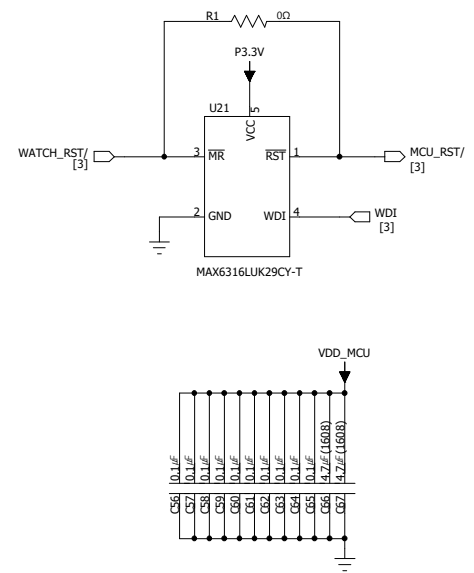

COMPANY: EOTRONIX		
TITLE: MCU		
DESIGNED:	DRAWING DATE:	REV:
CHECKED:	2023-03-22	r0.1
APPROVED:	SCALE: A2	SHEET: 3 OF 5


SDRAM

(현재 32MB / 차후 16MB 변경 가능(회로수정필요))

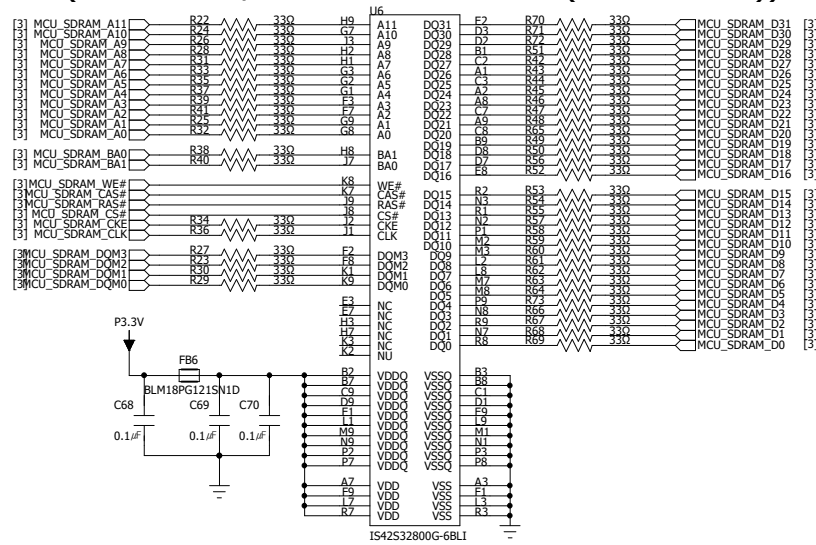


Flash Memory(Quad SPI)




(현재 64MB / 차후 32MB 변경 가능)

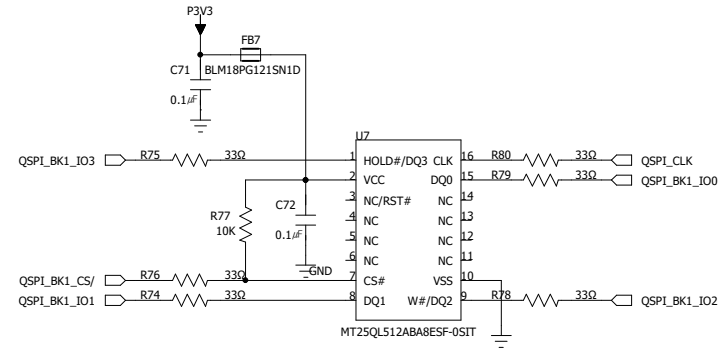

RGB LCD

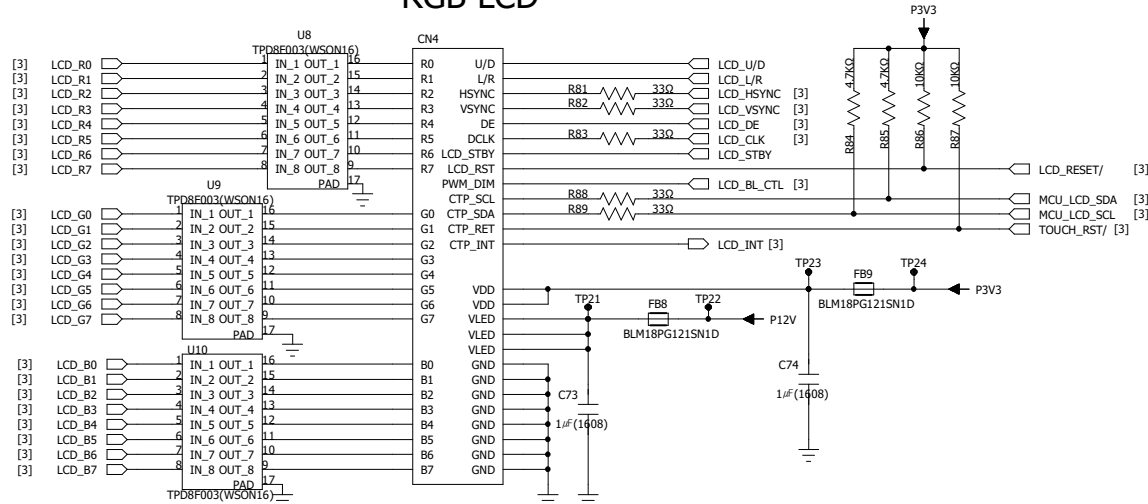

COMPANY: EOTRONIX		
TITLE: MEMORY/LCD		
DESIGNED:	DRAWING DATE:	REV:
CHECKED:	2023-03-22	r0.1
APPROVED:	SCALE: A2	SHEET: 4 OF 5

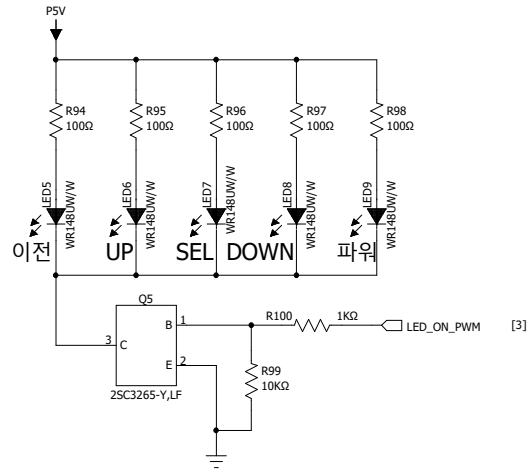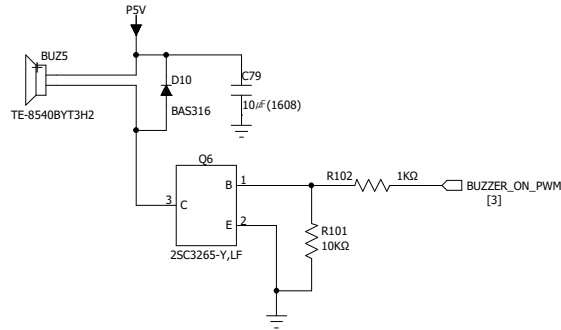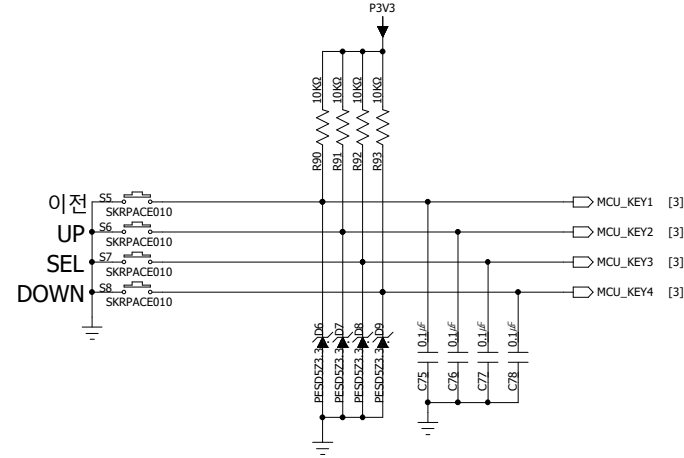LED***BUZZER******KEY***

COMPANY: EOTRONIX		
TITLE: KEY/BUZZER		
DESIGNED:	DRAWING DATE:	REV:
CHECKED:	2023-03-22	r0.1
APROVED:	SCALE: A2	SHEET: 5 OF 5