



POWER & NMEA2000

Input: 9~16V (Max 20.8V)


전원단 전체적으로 수정 (6/12)

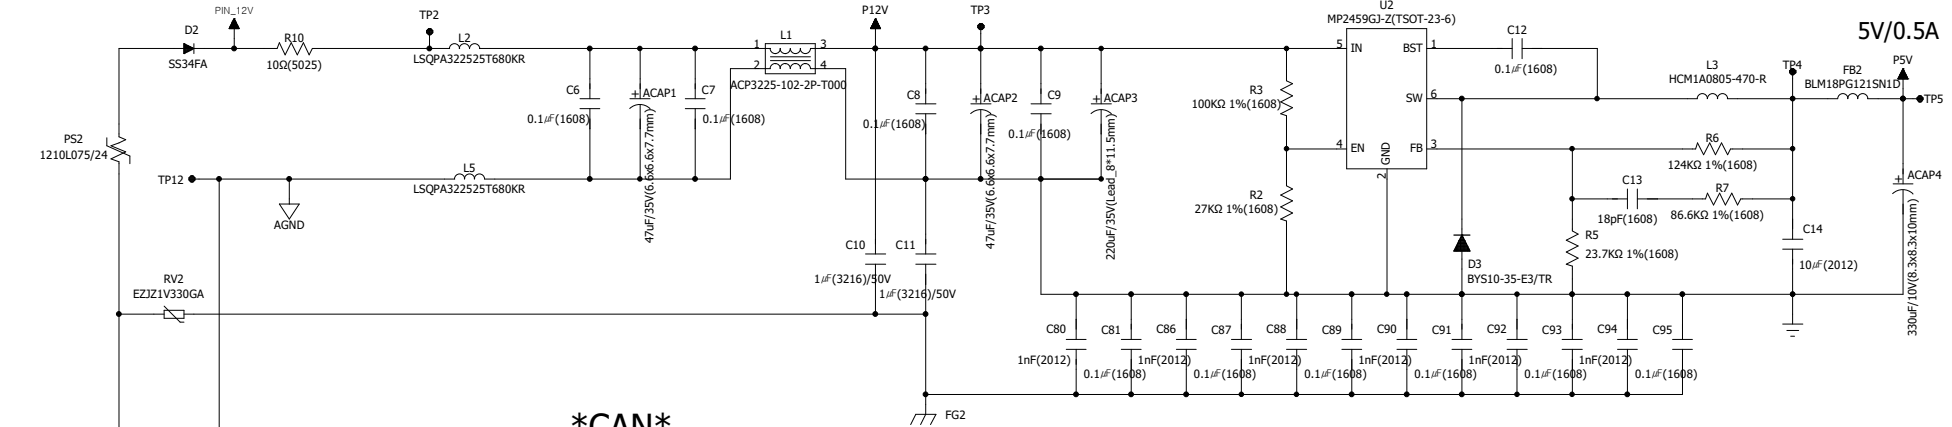

CAN

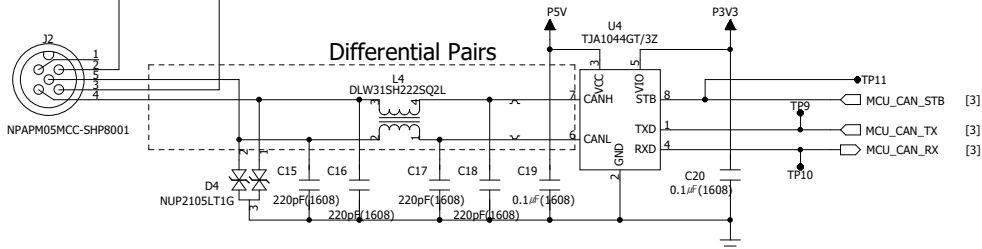


3.3V LDO

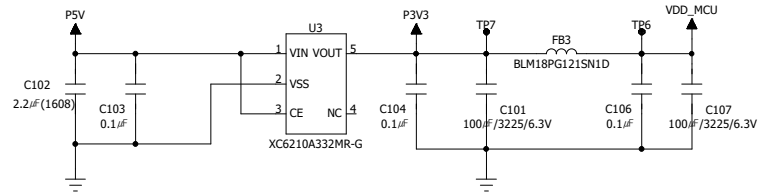


R11(저항 제거 or 0옴 저항) IC 내부 자체 풀다운 저항 존재

NMEA0183 & POWER

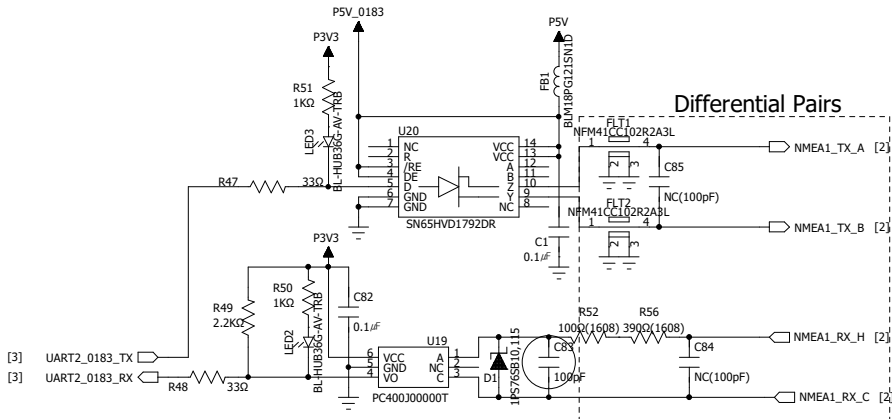

Input: 9~16V (Max 32V)

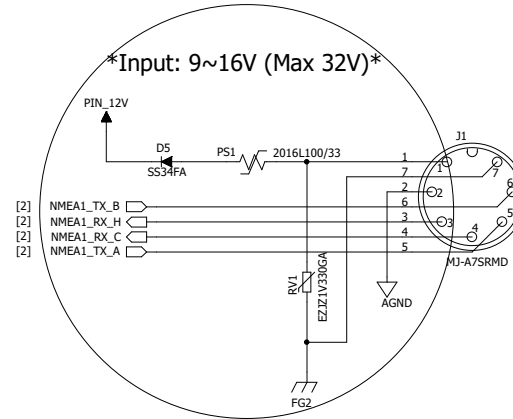

COMPANY: EOTRONIX		
TITLE: POWER		
DESIGNED:	DRAWING DATE:	REV:
CHECKED:	2023-06-15	v1.1
APPROVED:	SCALE: A2	SHEET: 2 OF 5

D

C

B

A



D

C


B

A


MCU

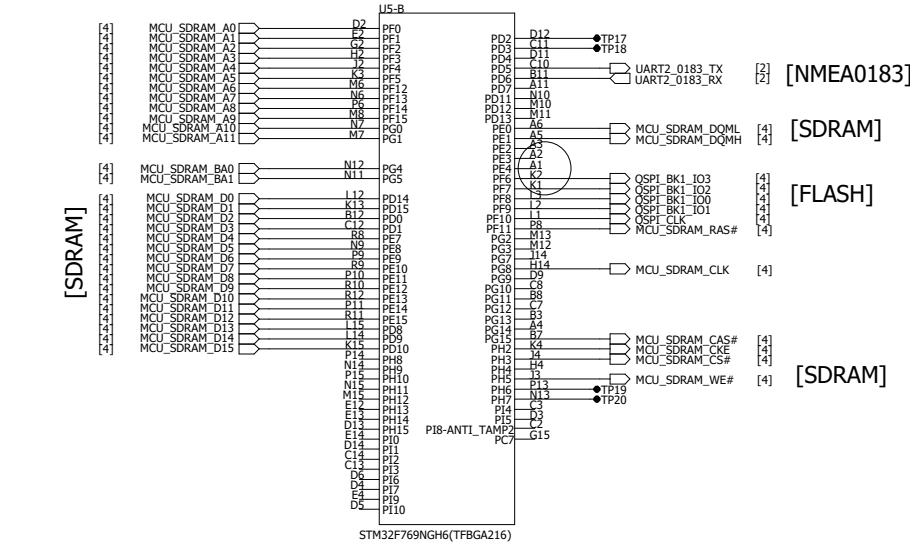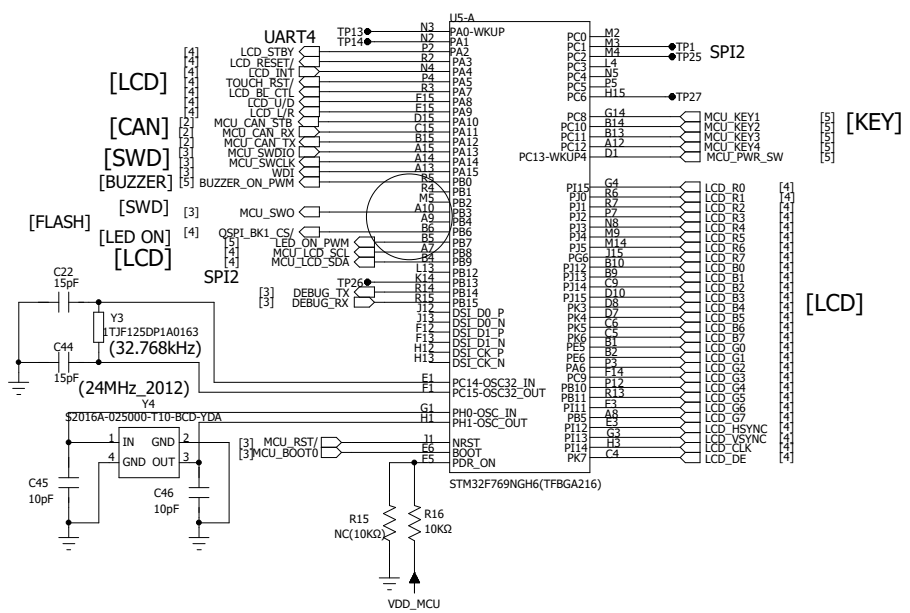


SWD

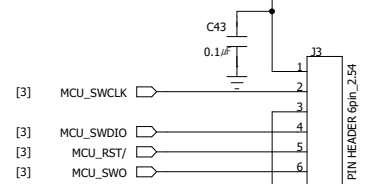


DEBUG

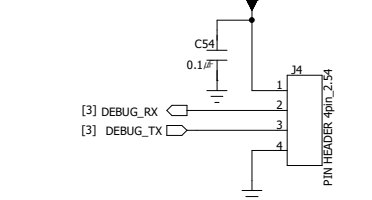


BOOT

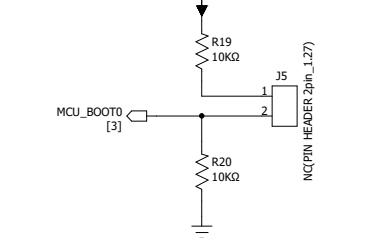

RESET

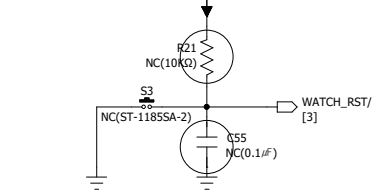


* WATCH DOG *

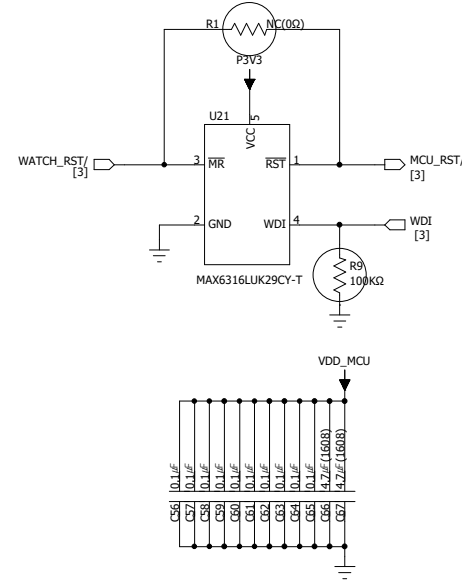


COMPANY: EOTRONIX		
TITLE: MCU		
DESIGNED:	DRAWING DATE:	REV:
CHECKED:	2023-06-15	v1.1
APPROVED:	SCALE: A2	SHEET: 3 OF 5




(현재 64MB / 차후 32MB 변경 가능)

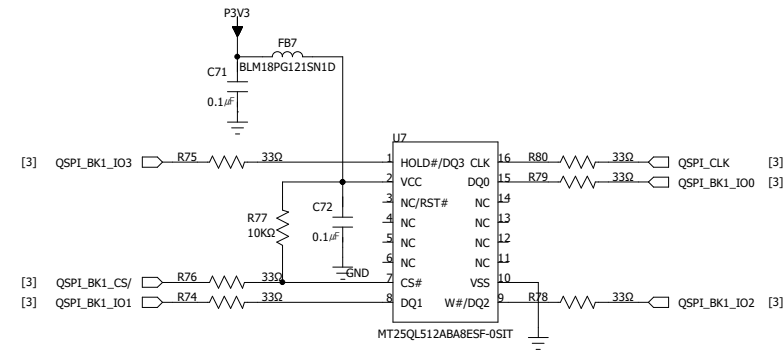

RGB LCD

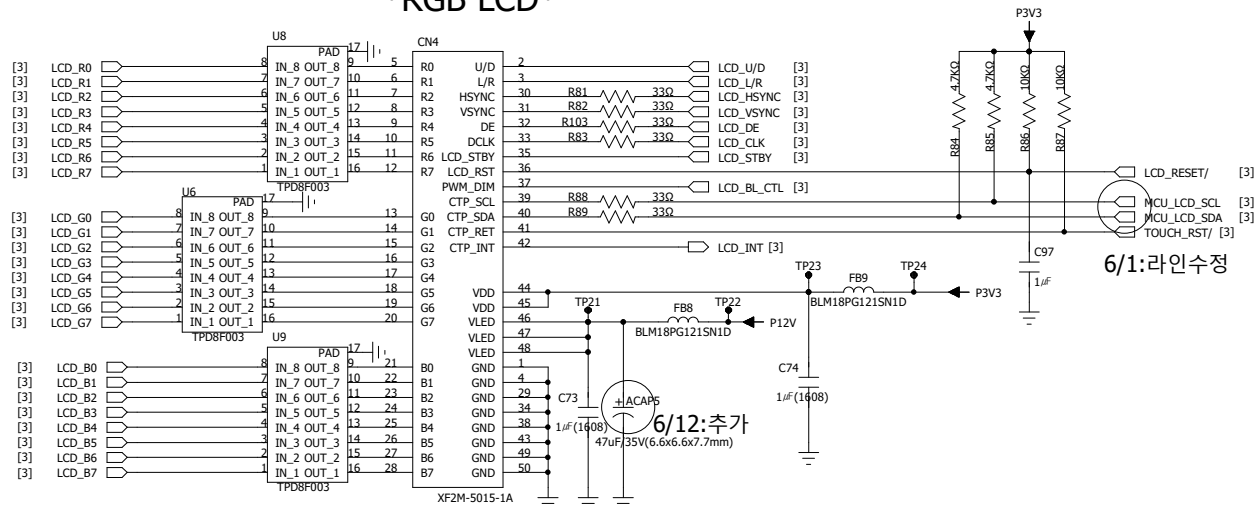

COMPANY:		EOTRONIX	
TITLE:		MEMORY/LCD	
DESIGNED:	DRAWING DATE:		REV:
CHECKED:	2023-06-15		v1.1
APPROVED:	SCALE: A2	SHEET: 4 OF 5	

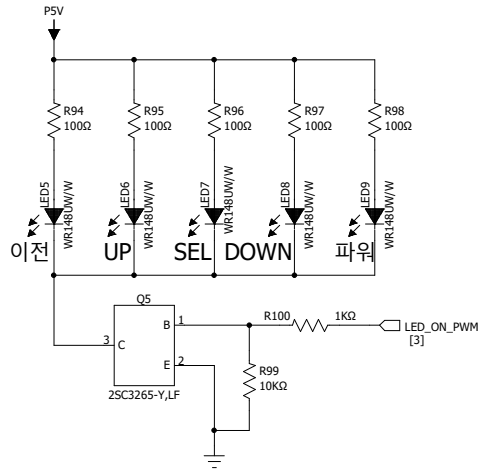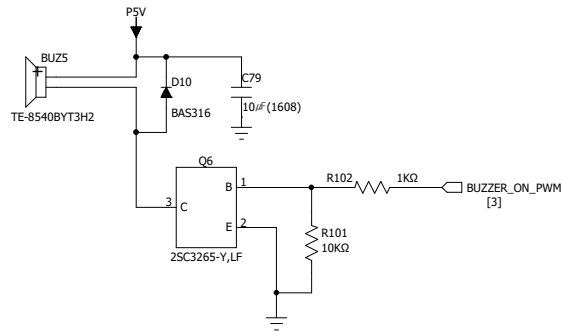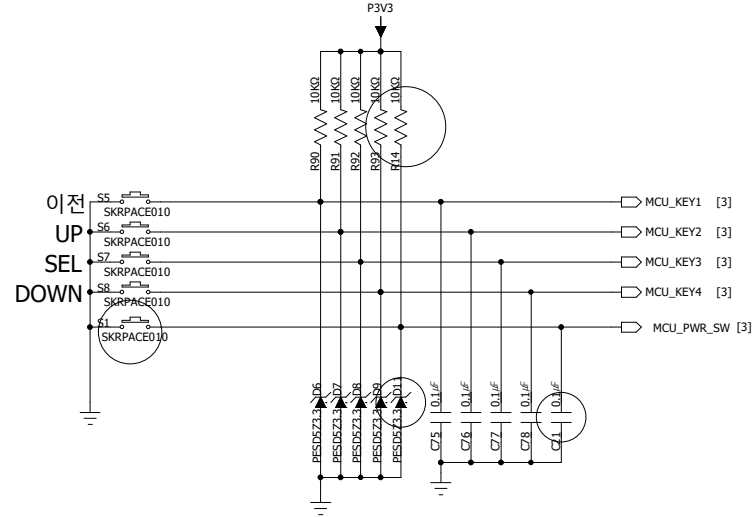LED***BUZZER******KEY***

COMPANY: EOTRONIX		
TITLE: KEY/BUZZER		
DESIGNED:	DRAWING DATE:	REV:
CHECKED:	2023-06-15	v1.1
APPROVED:	SCALE: A2	SHEET: 5 OF 5