


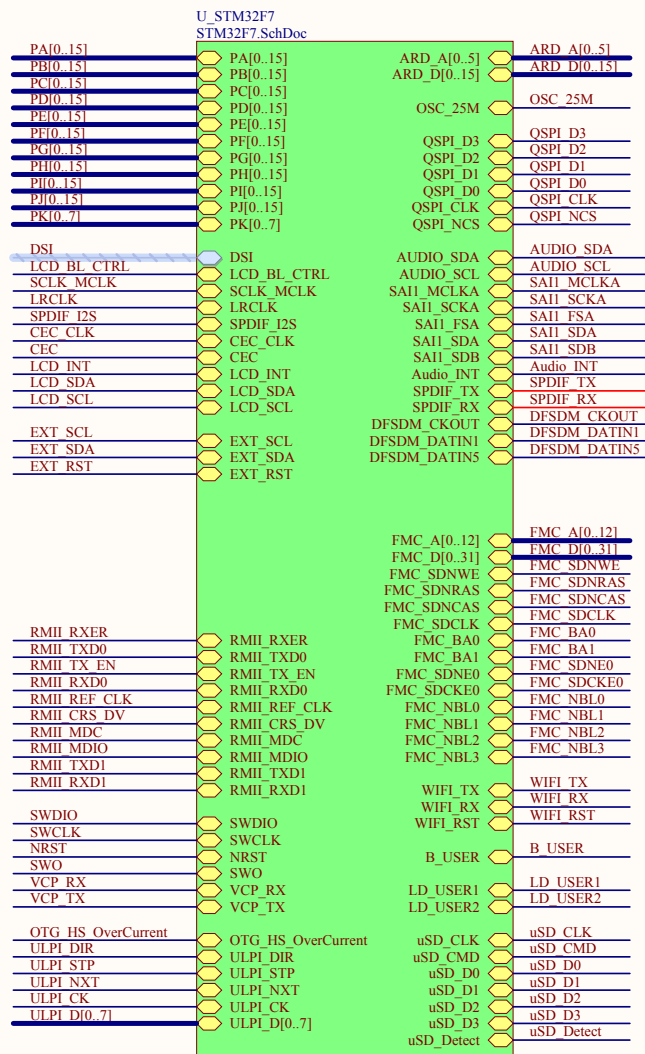



Rev B-01 --> MB1225 B-01, VDD_VREGDSI of U13 is connected to VDD instead of DSI_VDD12, EXT_I2C for CN2 is built by GPIOs. Add DFSDM_CKOUT/DATIN1/DATIN5, Remove L1
Rev A-01 --> MB1225 A-01




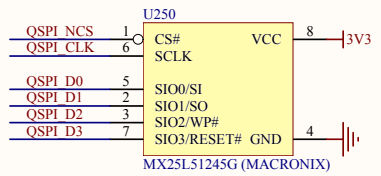


Quad SPI Flash Memory

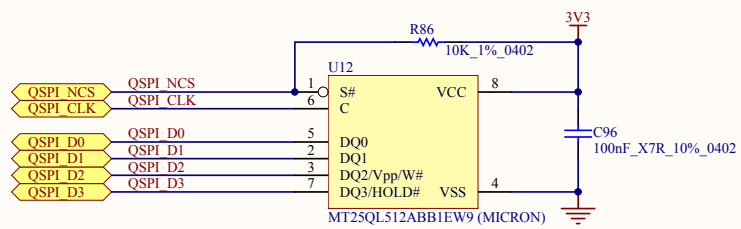

Arduino UNO connector

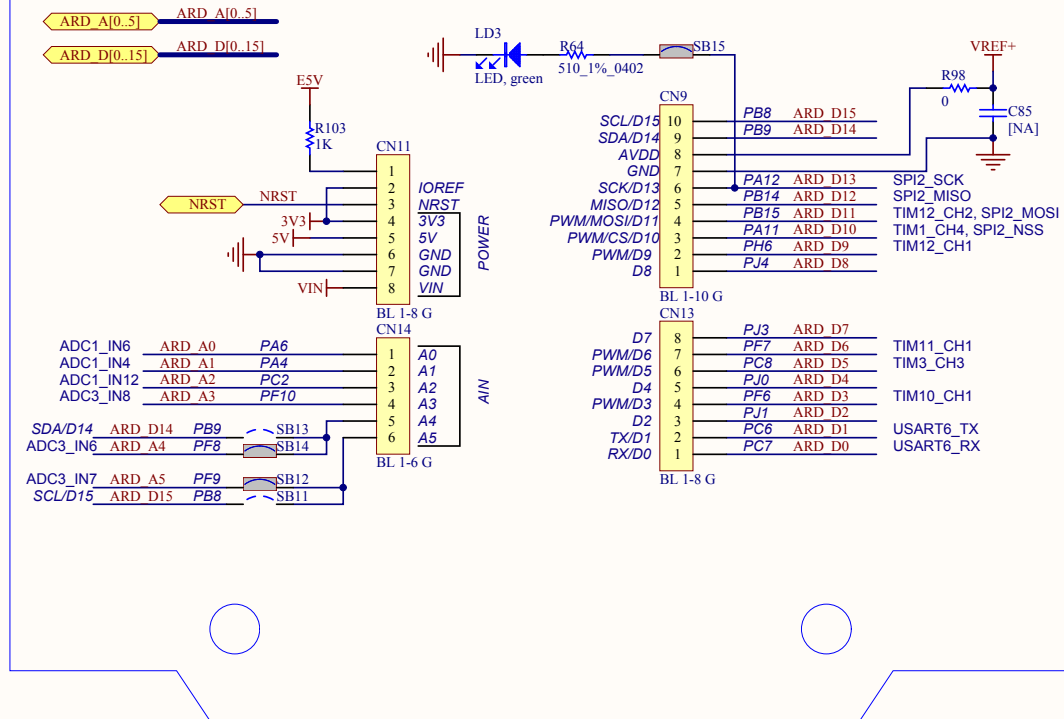




INPUT


Power Over Ethernet

Matched Net Lengths [Tolerance = 100mil]
Diff Pair 100ohmMatched Net Lengths [Tolerance = 100mil]
Diff Pair 100ohmMatched Net Lengths [Tolerance = 100mil]
Diff Pair 100ohmMatched Net Lengths [Tolerance = 100mil]
Diff Pair 100ohm


CN10

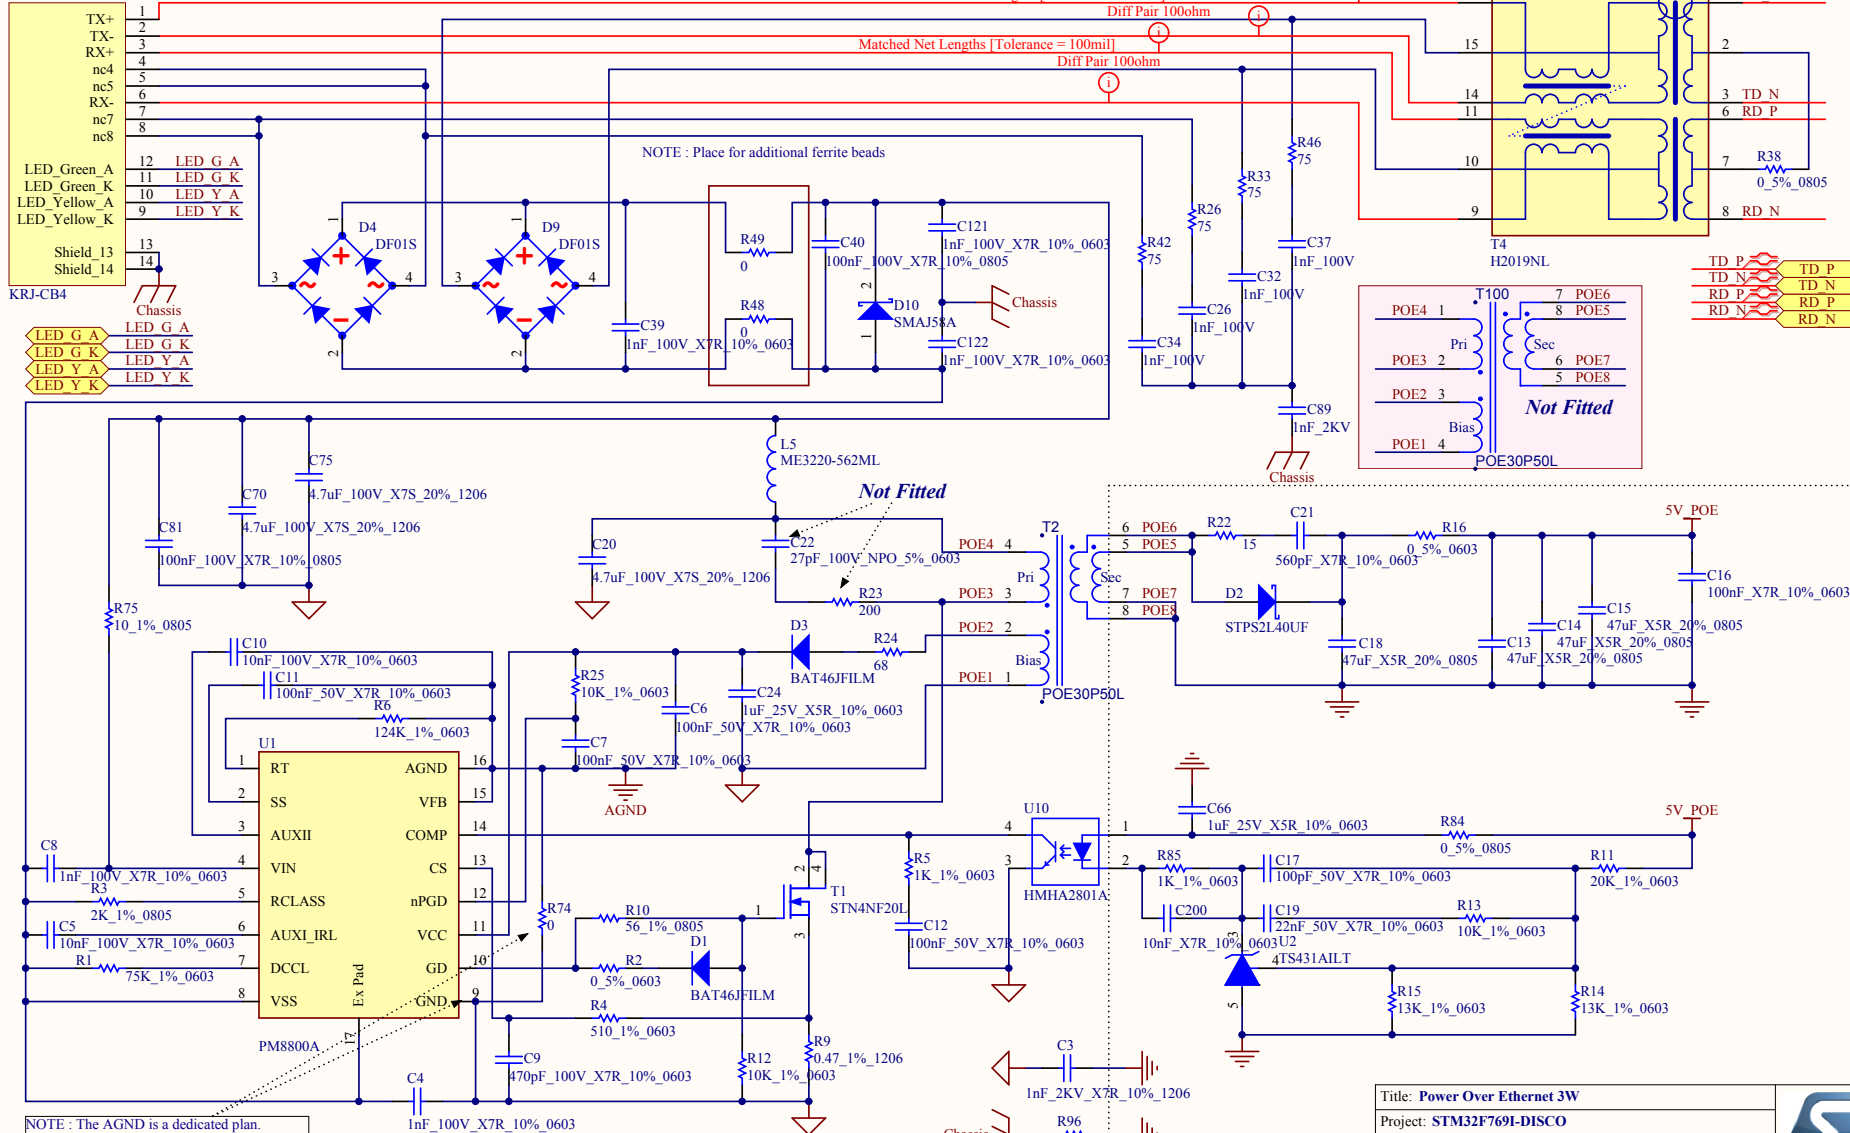


DSI LCD

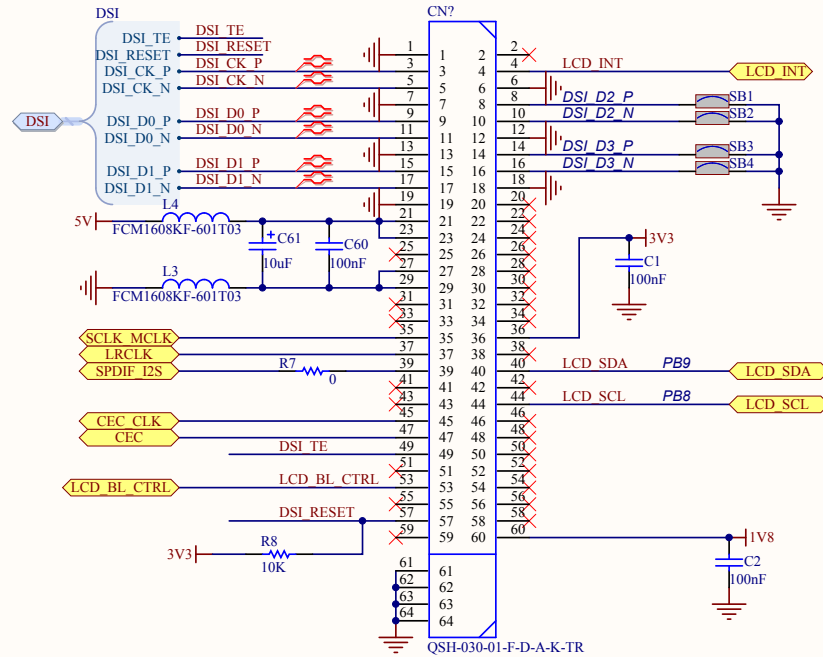



MB1166 I2C Address : 0101 0100




MICRO SD
(TF) Card

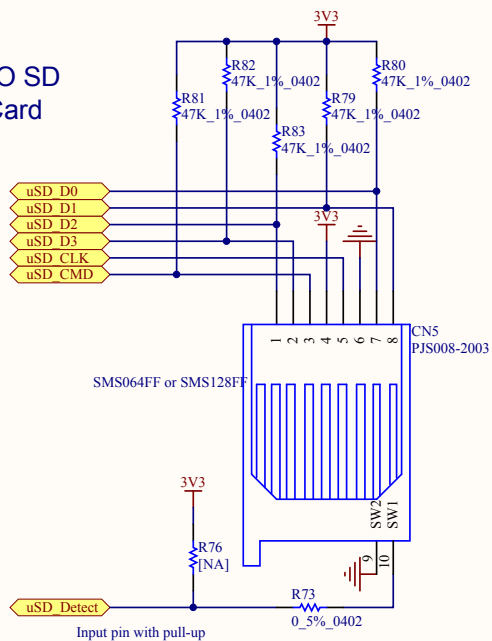

WIFI with ESP8266
or
I2C EXT Connector

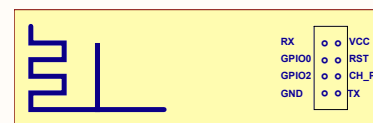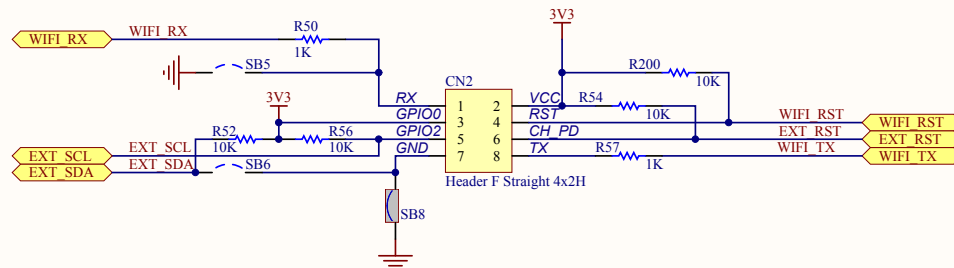


ESP8266-01 **WIFI board**
SB5, SB6, OFF
SB8, ON
EXT_RST, EXT_SCL, EXT_SDA = HIZ




I2C board
SB8, OFF
SB5, SB6, ON
 WIFI_RST, WIFI_RX, WIFI_TX = HIZ


USER & WAKE-UP Button

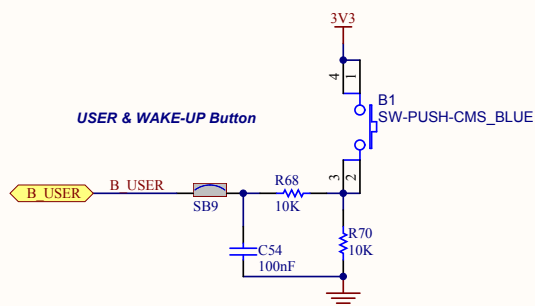

RESET Button

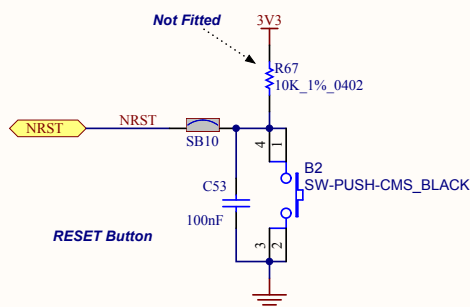

LEDs

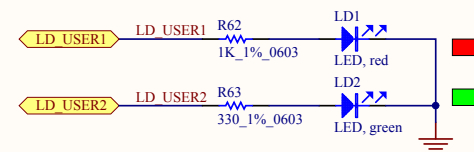

Title: uSD, Wifi, LEDs and Push Button			 life.augmented
Project: STM32F769I-DISCO			
Size: A4	Reference: MB1225	Revision: B-01	
Date: 3/11/2016		Sheet: 12 of 12	

