
Moisture Barrier Datasheet

The Sensidyne Moisture Barrier is a hydrophobic membrane utilized to inhibit water ingress within the sensor cavity of Sensidyne gas detectors like the **SensAlert ASI** and **SensAlarm Flex**. This barrier also acts as a filter against particulates which can absorb IR energy that can degrade IR sensor performance. Additionally, the Moisture Barrier, when utilized with the Rainshield, satisfies the requirements to achieve an IP-56 rating for customer applications where required.

NOTE: Any barrier will slow the rate of diffusion of gas to the sensor chamber. Therefore, we offer an extra thin 4mm membrane to minimize response time effects caused by diminished diffusion rates.

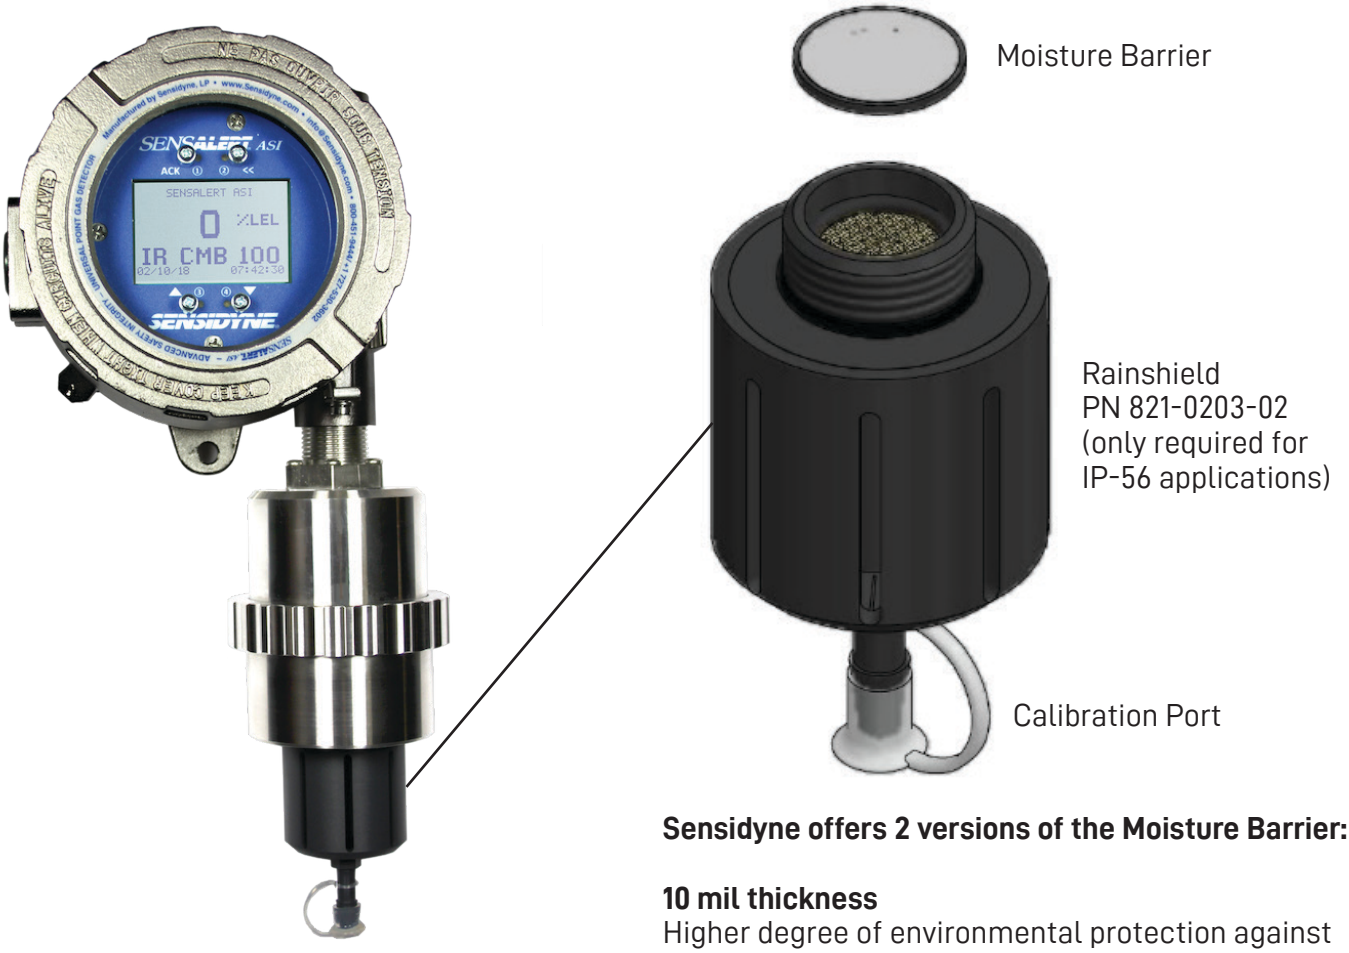

Application Note:
Use of the Moisture Barrier should be avoided with reactive gases, such as NH3, HF, HCl, Cl2, SO2, ClO2, NO2, ETO.

Sensidyne offers 2 versions of the Moisture Barrier:

10 mil thickness
Higher degree of environmental protection against moisture – preferred.
PN 821-0201-01: Single Disk
PN 821-0201-06: Pack of 6

4 mil thickness
For use where ultrafast sensor response is required.
PN 821-0537-01-R: Single Disk

SENSIDYNE, LP | 1000 112th Circle North, Suite 100 | St. Petersburg, Florida 33716 USA
800-451-9444 / +1 727-530-3602 | info@Sensidyne.com | www.Sensidyne.com

A company of the SCHAUENBURG International Group