SENSIDYNE®
Industrial Health & Safety Instrumentation


Sensidyne Piezo Horn/Sounder

General Purpose Low Profile Horn – P/N 7017380

- **Operates on 928VDC**
- **Choice of 28 tones**
- **Produces 82-100 dBa @ 10' (92-110 dBa @ 1m)**
- **Compact size 3" tall x 3.66" wide**
- **Panel or wall mount**
- **PLC compatible**
- **CE Compliant**
- **Type 4X, IP54**



The Sensidyne Piezo Horn is a compact, low profile sounder designed for audible annunciation of alarm conditions. The low voltage sound provides the user with the choice of different tones, switch selectable during installation. Each electrical connection has two terminals for looping in and out, eliminating the need for a separate terminal block and therefore, making installation easier. A second tone is available if a third wire is installed and connected to the second tone terminals.

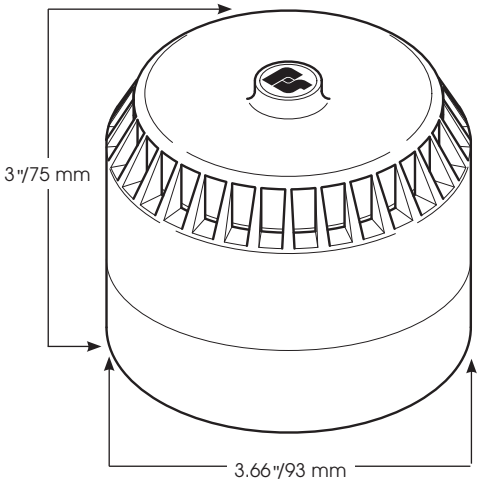

The sounder operates on a voltage range of 9 to 28 VDC without the need for adjustment. The dB output ranges from 82 to 100dBa at 10 feet (92110dBa @ 1m) depending on the tone selected. The volume control provides for +/-20dBa of adjustment.

Specifications		
Operating Temperature:	-13°F to 158°F	-25°C to 70°C
Net Weight:	10.0 oz.	0.283 Kg
Shipping Weight:	10.3 oz.	0.29 Kg
Height (from bottom):	3.0"	75.0 mm
Diameter:	3.66"	93.0 mm

Sensidyne, LP | 1000 112th Circle North, Suite 100 | St. Petersburg, Florida 33716
Tel: 800-451-9444 / +1 727-530-3602 | E-mail: info@Sensidyne.com | Web: www.Sensidyne.com

A company of the SCHAUENBURG International Group