

FEATURES & BENEFITS


MOUNTING

Heavy duty 3/16" (.47 cm) steel pre-drilled and threaded in-wall mounting plate along with all-thread studs and hardware.

OPTIONS

- Support Frame: Model 6800 In-wall floor mounted fixture support legs, welded steel 4-bolt floor flanges, and supplied with 'U' bolts and hardware.

For more information, visit www.hawscos.com or call (888) 640-4297.


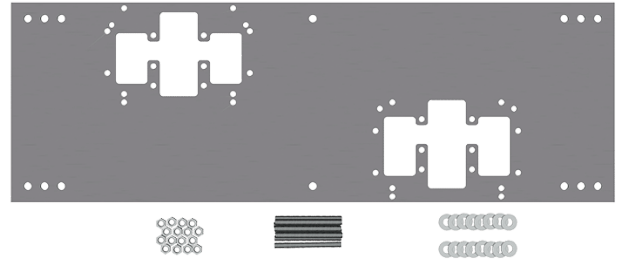


SPECIFICATIONS

Model 6700.4 'Hi-Lo' in-wall 3/16" thick steel pre-drilled mounting plate is larger, thicker and stronger than any other plate in the industry, and shall include the all-thread studs, nuts, and washers. For use with many Haws dual bubbler fountains.

APPLICATIONS


Haws produces mounting plates and frames to assist in the installation process as well as to provide solid bases for the wall mounted designed fountains. Mounting plates and frames meet the requirements solely for the specified applicable fountains and are not designed to be used in the installation of any unspecified fountain.

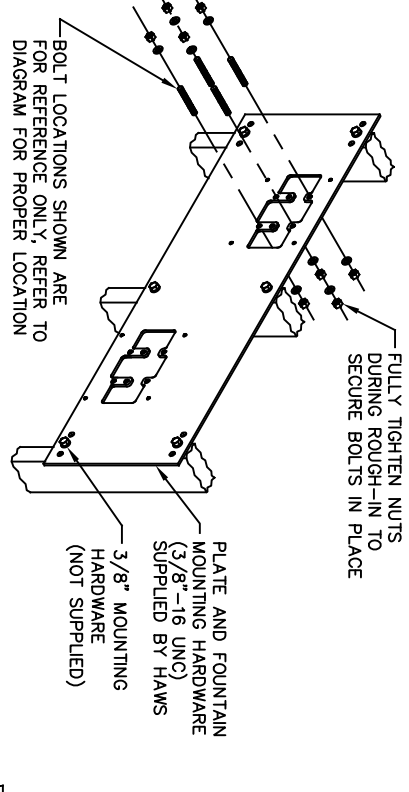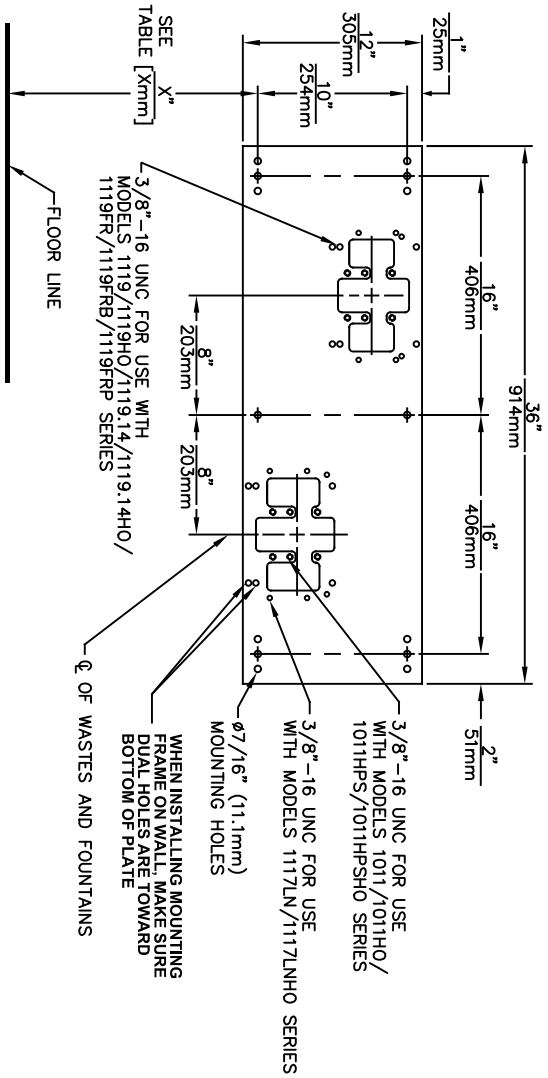

MODEL		MODEL	
DIMENSION	1011HO/PS	DIMENSION	1117HO
"X"	25-1/2" [648mm]	"X"	27" [686mm]
LOWER SUPPLY	28-3/4" [730mm]	LOWER SUPPLY	29-1/2" [749mm]
LOWER WASTE	27-7/8" [708mm]	LOWER WASTE	29-1/4" [743mm]
UPPER SUPPLY	33-3/4" [857mm]	UPPER SUPPLY	35-1/2" [892mm]
UPPER WASTE	32-7/8" [835mm]	UPPER WASTE	35-1/4" [895mm]

MODEL		MODEL	
DIMENSION	1119HO	DIMENSION	1119.14HO
"X"	27-5/8" [702mm]	"X"	27-5/8" [702mm]
LOWER SUPPLY	29-5/8" [752mm]	LOWER SUPPLY	29-5/8" [752mm]
LOWER WASTE	30-3/4" [781mm]	LOWER WASTE	30-3/4" [781mm]
UPPER SUPPLY	35-3/8" [905mm]	UPPER SUPPLY	35-3/8" [905mm]
UPPER WASTE	36-1/2" [927mm]	UPPER WASTE	36-1/2" [927mm]

MODEL		MODEL	
DIMENSION	1119FR	DIMENSION	1119.14FR
"X"	27-5/8" [702mm]	"X"	27-5/8" [702mm]
SUPPLY	SEE FREEZE VALVE ROUGH-IN	SUPPLY	SEE FREEZE VALVE ROUGH-IN
WASTE		WASTE	

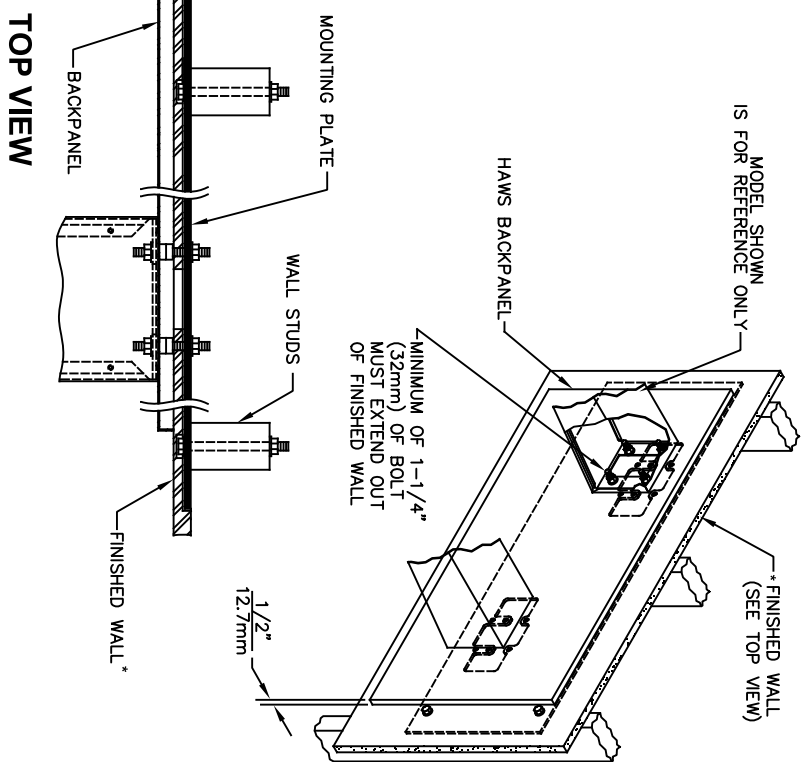

CAUTION

REGARDING CONCRETE/MASONRY WALL MOUNTING-DO NOT SECURE MOUNTING PLATE TO SAME SIDE OF WALL AS FOUNTAIN. AVOID COMPROMISING INTEGRITY OF WALL WHEN ANCHORING FOUNTAIN. IT IS RECOMMENDED THAT INSTALLER CALL TECHNICAL SUPPORT IF THERE ARE ANY QUESTIONS AS TO HOW TO OBTAIN A PROPER ANCHOR IN CONCRETE/MASONRY WALLS. 1-800-766-5612



Haws
Since 1906

1456 KLEPPE LANE
SPARKS, NEVADA 89431
(775) 359-4712 FAX (775) 359-7424
E-MAIL: HAWS@HAWS.CO.COM
WEBSITE: WWW.HAWS.CO.COM

ECN NO. REVISED PER BY: MODEL(S)
DRAWN: ECN 6148 JG
DATE: 04/29/03 CHKD: JG
C.L. JG
APPROVED: DATE: 02/11/25 SCALE: N/A DRAWING TYPE: INSTALLATION SHEET 1 OF 1

6700.4
PART NUMBER
0002080023
REVISION
20