

Pintbrook Urinal

- Vitreous china
- High Efficiency operates in the range of 0.125 gpf to 0.50 gpf (0.47 Lpf/1.9 Lpf)
- Powerful washdown action
- Optimized chinaware contours provide superior splash protection
- 3/4" inlet top spud
- Outlet connection threaded 2" NPT
- Wall hangers included
- Fixture only

☐ **6002.001** Top spud

Nominal Dimensions:

366 x 364 x 575mm

(14-7/16" x 14-5/16" x 22-5/8")

Recommended working pressure – between 20 psi at valve when flushing and 80 psi static

Compliance Certifications -
Meets or Exceeds the Following Specifications:

- ASME A112.19.2-2008/CSA B45.1-08 for Vitreous China Fixtures
- WaterSense when used with a WaterSense flushometer of the same rated flush volume



SEE REVERSE FOR ROUGHING-IN DIMENSIONS

To Be Specified:

- ☐ Color: ☐ White
☐ Flush Valve:

0.5 gpf Flush Valve: Sensor-Operated:

- ☐ American Standard Selectronic® #6063.051.002
DC Power

0.5 gpf Flush Valve: Manual-Operated:

- ☐ American Standard #6045.051.002

0.125 gpf Flush Valve: Sensor-Operated:

- ☐ American Standard Selectronic® #6063.013.002
DC Power

0.125 gpf Flush Valve: Manual-Operated:

- ☐ American Standard #6045.013.002



MEETS THE AMERICANS WITH DISABILITIES ACT GUIDELINES AND ANSI A117.1 ACCESSIBLE AND USEABLE BUILDINGS AND FACILITIES - CHECK LOCAL CODES.

- When installed so top of rim is 432mm (17") from finished floor.




When used with 0.125 gpf urinal flush valve When used with 0.125 or 0.5 gpf urinal flush valve ADA COMPLIANT

American Standard®, the American Standard logo and all associated product names are exclusively owned by AS America, Inc., and are registered or unregistered trademarks in the U.S. and internationally. © 2026 AS America, Inc. All rights reserved.

**American
Standard**

**Pintbrook™
Urinal
VITREOUS CHINA**

 **BARRIER FREE**

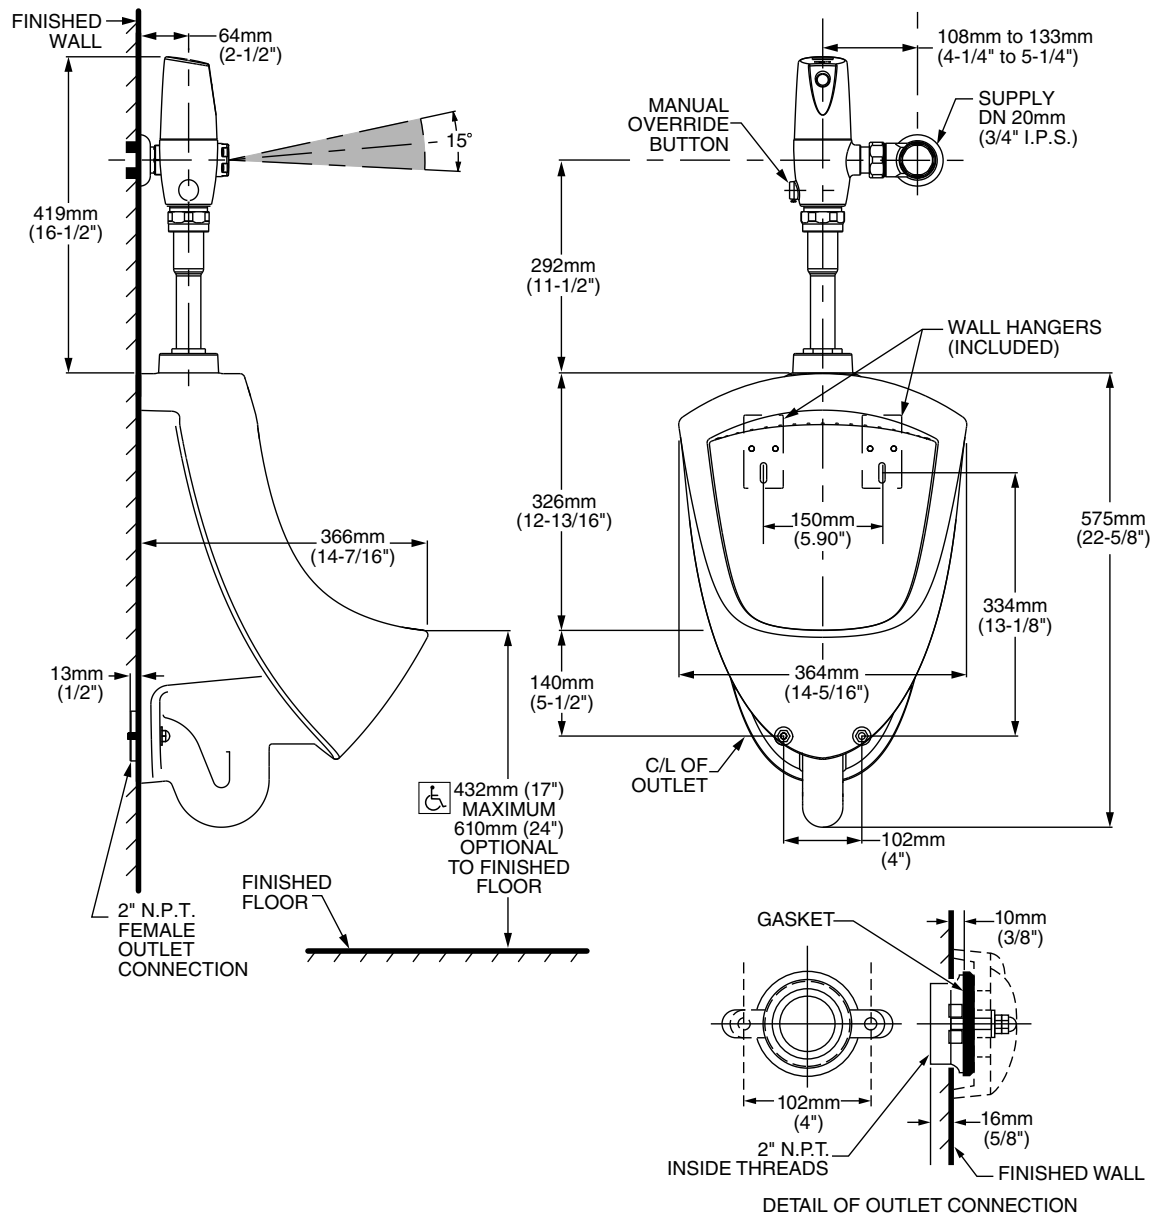

NOTES:

FLUSH VALVE NOT INCLUDED WITH FIXTURE AND MUST BE ORDERED SEPARATELY.
PROVIDE SUITABLE REINFORCEMENT FOR ALL WALL SUPPORTS.



MEETS THE AMERICANS WITH DISABILITIES ACT GUIDELINES AND ANSI A117.1 ACCESSIBLE AND USEABLE BUILDINGS AND FACILITIES - CHECK LOCAL CODES.
When installed so top of rim is 432mm (17") maximum from finished floor.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

American Standard®, the American Standard logo and all associated product names are exclusively owned by AS America, Inc., and are registered or unregistered trademarks in the U.S. and internationally. © 2026 AS America, Inc. All rights reserved.



Royal® Manual Flushometer

ROYAL 186-0.125-CP

Product description

0.125 gpf, Dual-Filtered Bypass, Polished Chrome Finish, Fixture Connection Top Spud, Single Flush, Royal® Exposed Manual Urinal Flushometer.

Compliances & Certifications



(ADA Compliant*, BAA Compliant, BABAA Compliant, BREEAM Materials Credit, BREEAM Water Credit, cUPC Green Certified, EPD, Green Globes Credit, Green Globes Water, HPD, IAPMO, LBC Credit, LEED Credit, LEED HPD, LEED Water, Made in the USA, Satisfies LEED Credits, EPA WaterSense Listed, WELL Building Standard)

Code 3912633

Finish

 Polished Chrome (CP)

Downloads

- [Royal Exposed Installation Instructions.pdf](#)
- [Control Stop Repair and Maintenance Guide.pdf](#)
- [Flush Connections Flanges Repair and Maintenance Guide.pdf](#)
- [Additional Downloads](#)

Videos

- [PVD Special Finishes](#)

Product Information

ROYAL 186-0.125-CP

Details

- Flush Volume: 0.125 gpf (0.5 lpf)
- Finish: Polished Chrome (CP)
- Valve: Diaphragm
- Bypass: Dual-Filtered Bypass
- Valve Body Material: Semi-red Brass
- Fixture Type: Urinal
- Fixture Connection: Top Spud
- Rough-in Dimension: 11.5" (292mm)
- Spud Coupling: 0.75" (19mm)
- Supply Pipe: 0.75" (19mm)

Features

- Water conservation is aided by the ADA-compliant, non-hold-open handle, which prevents urinal from exceeding intended flush volume
- Flush accuracy is controlled by CID™ technology, also enhancing water efficiency
- Integrity of the product is maintained with the vandal-resistant stop cap
- Durability is facilitated with high copper, low zinc brass castings for dezincification resistance
- Adjustable tailpiece
- PERMEX® Synthetic Rubber Diaphragm with Dual Filtered Fixed Bypass
- Valve body, Cover, Tailpiece and Control Stop shall be in compliance with ASTM Alloy Classification for Semi-Red Brass
- Valve shall be in compliance to the applicable sections of ASSE 1037

Recommended specifications

Valve Body, Cover, Tailpiece and Control Stop shall be in conformance with ASTM Alloy Classification for Semi-Red Brass. Valve shall be in compliance with the applicable sections of ASSE 1037 and ANSI/ASME 112.19.2.

Valve Operating Pressure (Flowing)

15-80 psi (103 - 552 kPa). Specific fixtures may require greater minimum flowing pressure - consult manufacturer requirements.

Warranty

[View Warranty Information](#)

Notes

All information contained within this document subject to change without notice.


*Compliant with ADA accessibility requirements when installed according to ADA standards.


Looking for other variations of the ROYAL 186 product? [View the general spec sheet with all options.](#)

[Find a compatible urinal](#) for this flushometer.

[Find a compatible water closet](#) for this flushometer.

WaterSense compliant when used with a 0.125 gpf (0.5 lpf) WaterSense fixture.

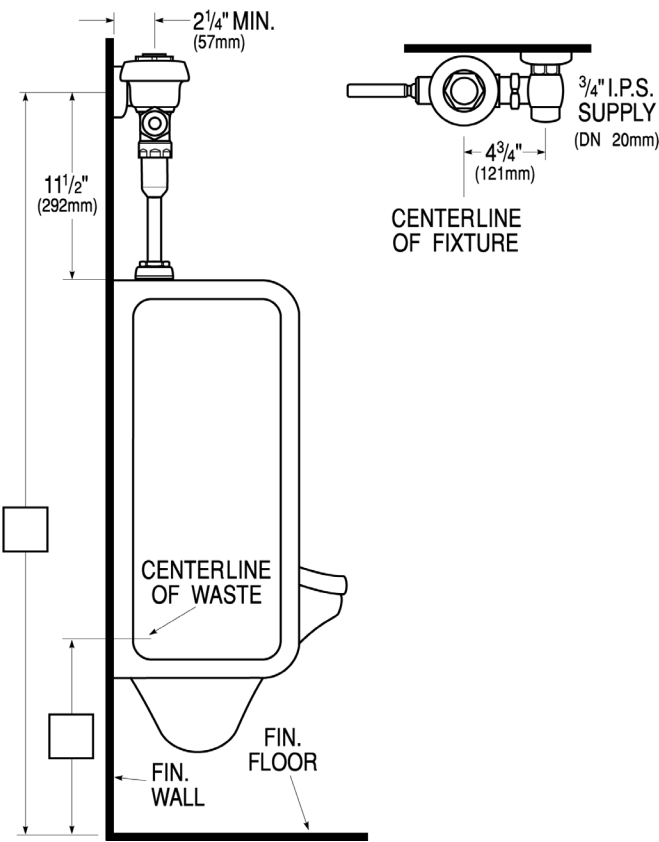

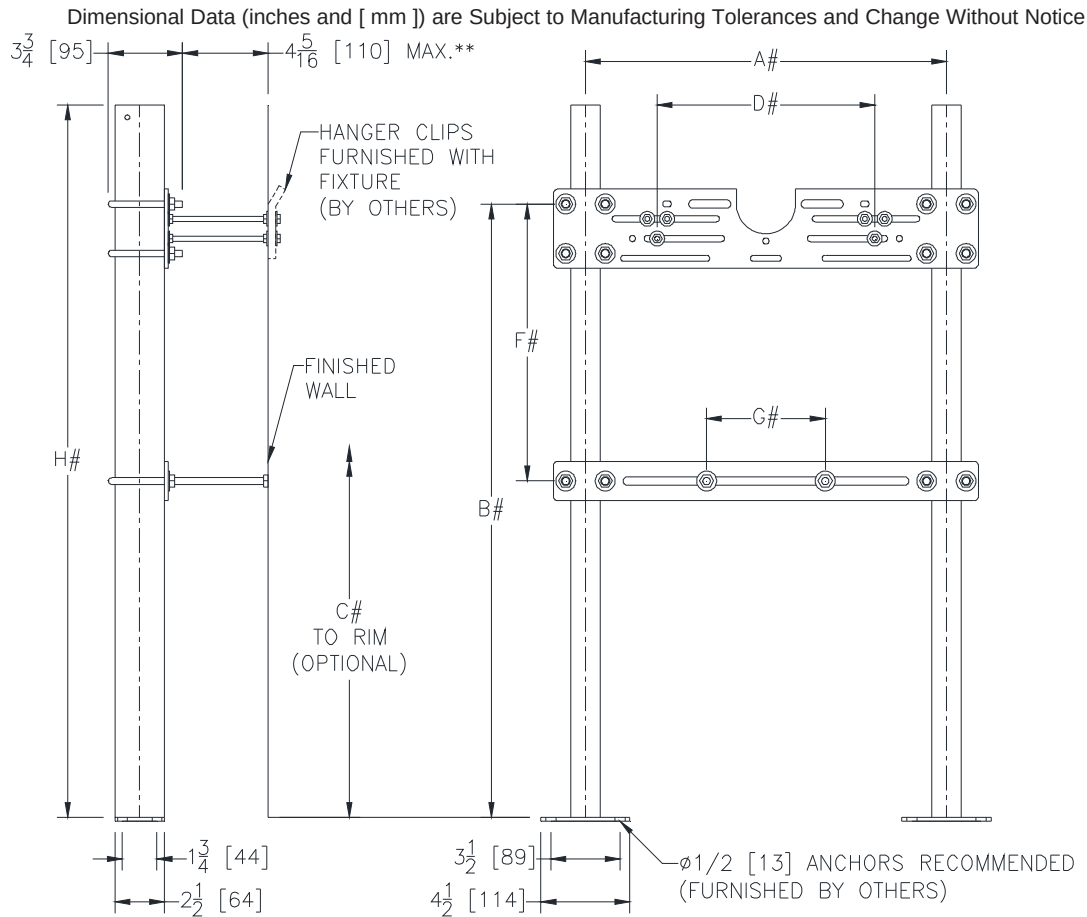**Z1222****PLATE TYPE SYSTEM
WITH BEARING PLATE****UR-1****SPECIFICATION SHEET****TAG** _____

**WITH STANDARD STUD LENGTH OF 6 [152]
REFER TO ROUGH-IN GUIDE OF SPECIFIC FIXTURE FOR DIMENSION

Product No.	Approx. Wt. Lbs. [kg]
Z1222	30 [14]

ENGINEERING SPECIFICATION: ZURN Z1222

Wall urinal support system complete with Dura-Coated carbon structural steel rectangular tubing uprights, conforming to ASTM A500 Grade C, with welded base feet having slotted floor anchor holes. Lower bearing plate is vertically adjustable with slot to accommodate bearing jack placement. Upper universal hanger plate is pre-notched for back spud inlet and is designed for various hardware positions and fixtures. Includes mounting fasteners and hardware. Carrier system exceeds load and deflection requirements as outlined in ASME Standard A112.6.1M.

OPTIONS (Check/specify appropriate options)**PREFIXES**

___ Z Dura-Coated System with Universal Plate*

SUFFIXES

___ -EZ Easy to Install Assembly (Uprights, bearing plate, and hanger plate are factory assembled)
___ -UA Urinal Adapter
___ -58 Flush Valve Supply Support

* Regularly furnished unless otherwise specified.

Zurn Industries, LLC | Specification Drainage Operation
1801 Pittsburgh Avenue, Erie, PA U.S.A. 16502 · Ph. 855-663-9876, Fax 814-454-7929
In Canada | **Zurn Industries Limited**
3544 Nashua Drive, Mississauga, Ontario L4V 1L2 · Ph. 905-405-8272, Fax 905-405-1292
www.zurn.com

Rev. G
Date: 09/27/2017
C.N. No. 137976
Prod. | Dwg. No. Z1222