


**Z100****15 [381] DIAMETER MAIN DRAIN
LOW SILHOUETTE DOME****RD-1**

SPECIFICATION SHEET

TAG _____

Design and Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

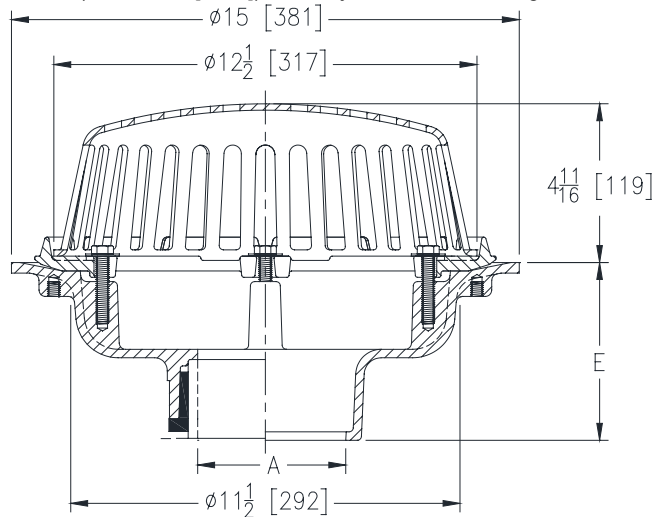

A Pipe Size In. [mm]	Approx. Wt. Lbs. [kg]	Dome Open Area Sq. In. [cm ²]
2, 3, 4, [51, 76, 102]	26 [12]	103 [665]
5, 6 [127, 152]	27 [12]	
8 [203]	28 [13]	

ENGINEERING SPECIFICATION: ZURN Z100

15" [381mm] Diameter roof drain. Dura-Coated cast iron body with combination membrane flashing clamp/gravel guard and low silhouette Poly-Dome.

OPTIONS (Check/specify appropriate options)**PIPE SIZE**

3, 4, 5, 6 [76, 102, 127, 152]

8 [203]

2, 3, 4, 6, 8 [51, 76, 102, 152, 203]

2, 3, 4, 5, 6, 8 [51, 76, 102, 127, 152, 203]

2, 3, 4 [51, 76, 102]

6 [102]

(Specify size/type) **OUTLET**

___ IC Inside Caulk

___ IC Inside Caulk

___ IP Threaded

___ NH No-Hub

___ NL Neo-Loc

___ NL Neo-Loc

'E' BODY HT. DIM.

5-1/4 [133]

6 -13/16 [173]

3-3/4 [95]

5-1/4 [133]

4-9/16 [116]

5-7/16 [112]

PREFIXES

___ Z D.C.C.I. Body with Poly-Dome*

___ ZA D.C.C.I. Body with Aluminum Dome

___ ZC D.C.C.I. Body with Cast Iron Dome

___ ZRB D.C.C.I. Body with Plain Bronze Dome

SUFFIXES

___ -AC Angular Underdeck Clamp

___ -AR Acid Resistant Epoxy Coated

___ -AW 3/4 [19] to 4 [102] Adj. Water Level Regulator
(Specify Height) (ZC Only)

___ -C Underdeck Clamp

___ -DE Deck Extension

___ -DP Top-Set® Deck Plate (Replaces both the -C and -R)

___ -DR Top-Set® Drain Riser

___ -E Static Extension 1 [25] thru 4 [102] (Specify Ht.)

___ -EA Adjustable Extension Assembly
2-1/8 [54] thru 3-1/2 [89]

___ -EB Top-Set® Adjustable Extension Assembly

___ -FG Flush Grate

___ -G Galvanized Cast Iron

___ -HD 6-3/4 [171] High Aluminum Dome Strainer
(148 Sq. In. [955 cm²] Open Area) (ZA Only)

___ -R Roof Sump Receiver

___ -SC Secondary Clamp Collar

___ -SS Stainless Steel Mesh Screen Over Dome

___ -ST Dome with Solid Top (ZA & ZC Only)

___ -TC Neo-Loc Test Cap Gasket
(2, 3, 4 [51, 76, 102] NL Bottom Outlet Only)

___ -VP Vandal-Proof Secured Top

___ -W2 2 [51] Internal Water Dam

___ -W3 3 [76] Internal Water Dam

___ -W4 4 [102] Internal Water Dam

___ -84 Stainless Steel Perforated Gravel Guard

___ -85 Stainless Steel Perforated Extension

___ -89 2 [51] High External Water Dam

___ -90 90° Threaded Side Outlet Body

* Regularly furnished unless otherwise specified

⚠ WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov**⚠ ADVERTENCIA:** Cáncer y daño reproductivo - www.P65Warnings.ca.gov**⚠ AVERTISSEMENT:** Cancer et effets néfastes sur la reproduction - www.P65Warnings.ca.govZurn Water, LLC | Specification Drainage Operation
1801 Pittsburgh Avenue, Erie, PA 16502, Ph. 855.663.9876In Canada | Zurn Water, LLC
7900 Goreway Drive, Unit 10, Brampton, Ontario L6T 5W6, Ph. 877.892.5216www.zurn.com

Rev.	U	Page 1 of 1
Date:	03/19/26	
C.N. No.	147651	
Patent	zurn.com/patents	
Prod. Dwg. No.	Z100	