EXTERIOR

MURAL DESIGN GUARDRAILS

STEP 1:
Determine the location(s) of the mural. The mural must be visible to both vehicular traffic and pedestrians approaching the property. You may have one or more locations if you see the benefits.
- Near the main entrance
- Under the Porte Cochere (optional, but must be provided as secondary location)
- Exterior Pedestrian Entry

STEP 2:
Measure the overall size of the exterior mural area on-site.

STEP 3:
Determine the area of the mural and crop it to indicate with dimensions and paint colors. **See next page for imagery.**

STEP 4:
Determine general paint color locations (PT-20, PT-21, PT-22, and PT-23). Follow additional instructions on PIP for exterior scope of work.

STEP 5:
Submit the documentation for Hilton Design Review through Project HUB.

EXTERIOR SIGNAGE:
Verify exterior signage locations, quantities, and sizes with Hilton-approved vendor. The list of vendors are provided in the Design Information Site. The owner or GC must coordinate with the vendor to submit a proposal to Hilton's Exterior Signage Team for review.

INTEGRATING LOGO SIGNAGE:
If the exterior logo needs to be placed on the mural, the logo may only appear on the lightest gray exterior paint color (PT-20).

EXTERIOR SIGNAGE BACKER PANEL COLORS:
If the exterior signage needs to be placed on the walls with accent colors PT-21 or PT-22, the designer/owner must notify the exterior signage vendor to coordinate the signage backer color as necessary.

MURAL LOCATION SCENARIOS

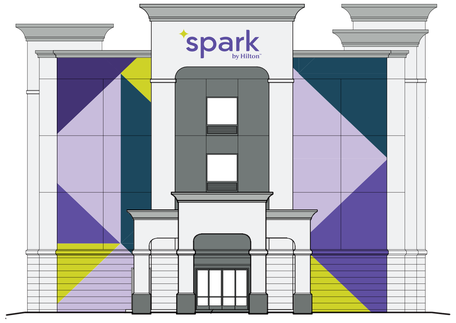

SMALL AREA - 2-SIDED

ASYMMETRICAL APPLICATION

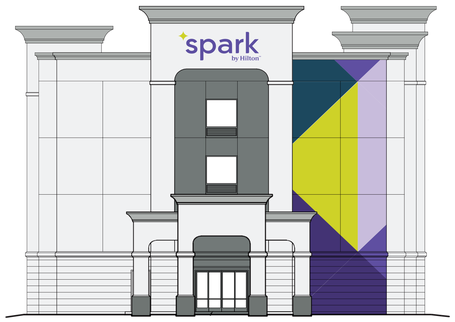

SMALL AREA - 1-SIDED

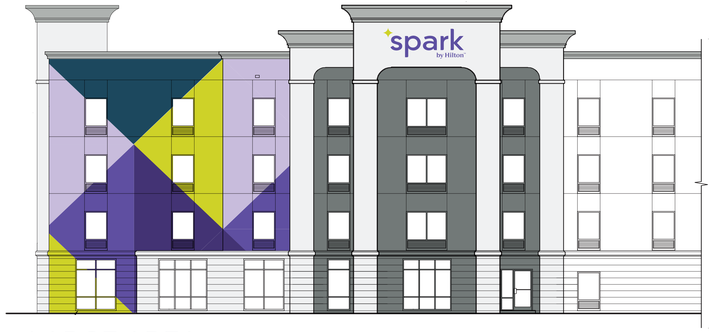

LARGE AREA

PORTE COCHERE

CORNER APPLICATION