i-Optik

Better vision, Better life

ARK-910 / AR-910

FULLY AUTOMATED

Auto Ref/keratometer



ARK-910 / AR-910

Auto Ref/keratometer



Automatic focus and measurement

The AR-910/ARK-910 adopts 3D fully automated focus technology, which only needs the patient to place the chin on the chin rest to activate focusing and measurement of the left and right eyes. The optical system with whole new design ensures the accuracy and consistence of the measurement result.



Auto measurement

The device can automatically target the eyes and finish measurement.



Accurate measurement

The new optical system with separated control system ensures the accuracy and consistency of the measurement result.



Easy to operate


No need for manually eye-targeting, can be operated even for non-professionals.



Multiple improvements of objective refraction


New generation optical system

Built-in SLD light source light energy distributes more even and uniform, the captured image is clearer compared to LED light source. Even if the reflected light from the fundus is weak, through the high-sensitivity CCD, the ring image can be captured. This new optical system significantly improves the measuring ability for different patient groups, especially for cataractous eyes.

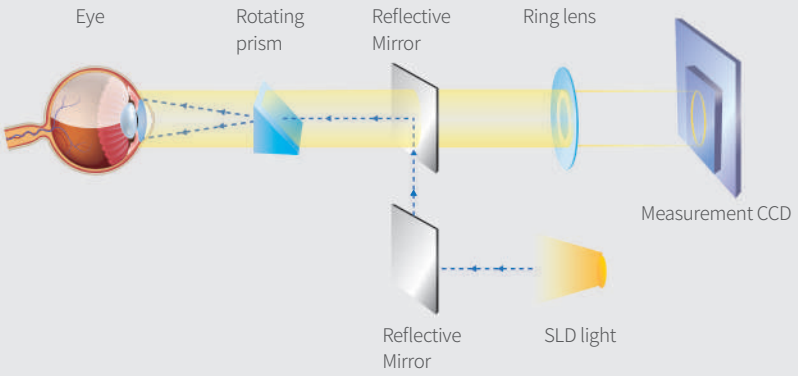


Independent fogging and measuring system

The new separate zone control design makes the fogging and measuring process independent of each other: fogging first then the measurement, which makes the human eye fully relaxed before measurement, helping capture the true diopter of the human eye and improve the accuracy of the measurement result.

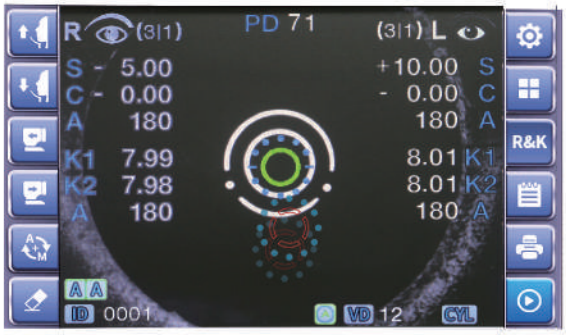


Fully automated measurement

Patient only need to place the chin on the chin rest of the AR-910/ARK-910, and it will automatically adjust to the suitable height, track the eyes and finish measurement automatically with no other manual assistance.

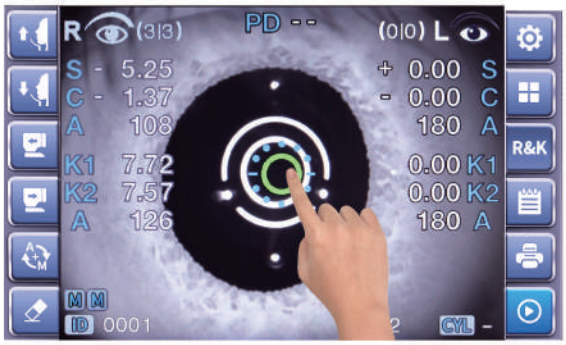

Intelligent touch operation

Sensitive touch reaction. The corresponding functions can be accessed and realized through different touch methods. (One-click to move to the target position; double-click to start measurement; one click on the left and right eye icon for fast switch).

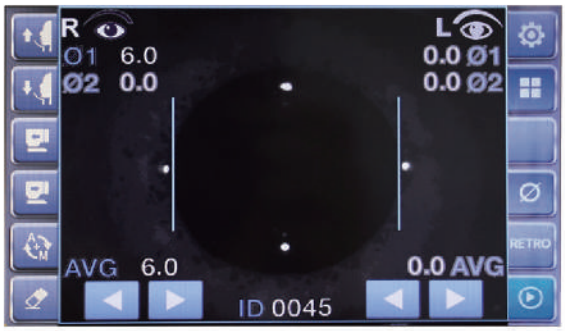

Pupil diameter measurement

The pupil diameter (PD) and refraction data are recorded synchronously for data comparison under difference circumstances to provide more reliable basis for prescription.




Retro-Illumination measurement

The SLD light source and high-sensitivity CCD can help capture the patient's anterior segment image for simple evaluation for the clarity.



Tiltable LCD touch screen

7.0-inch touch screen with high-quality hinges, the screen can be adjusted and stably maintained at the desired angle.

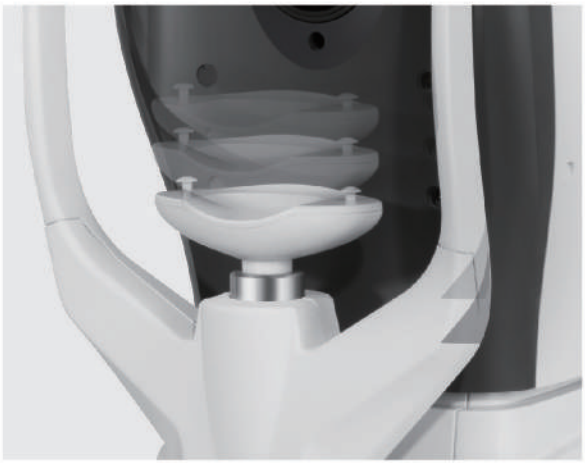

Motorized chin rest

The height of the patient's eyes can be quickly adjusted through the touch screen or physical button before the measurement, and the movement is smooth and quiet.




Built-in thermal printer

Automatic paper cut, fast printer paper loading design; only 2 moves for replacing the printer paper: load the paper roll and then close the cover.



Highly efficient data transfer

The AR-910/ARK-910 can be connected wirelessly with i-Optik auto phoropter. When measurement is finished, the measured data can be transferred to the photopter directly, which makes the subjective refraction process more convenient and efficient.

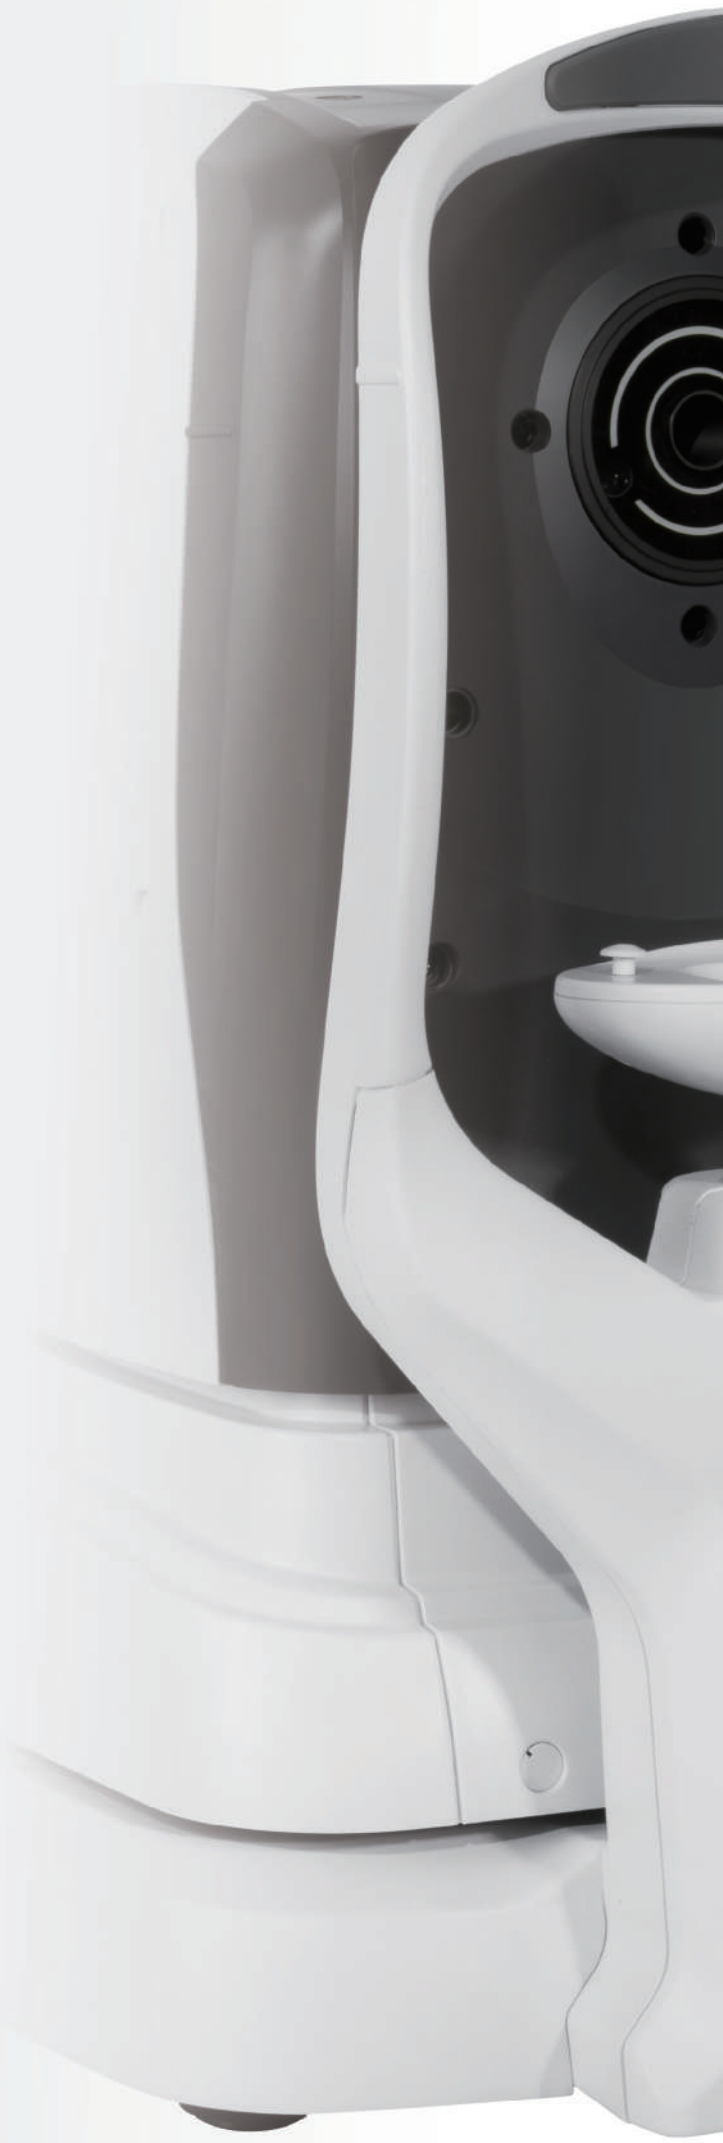

i-Optik

Better vision, Better life

Specifications

Refraction	Targe:	Auto fogging
	Vertex distance(VD):	0, 12, 13.75, 15mm
	Sphere:	-25.00D ~ + 22.00D (0.12/0.25D step)
		(0.12/0.25D step)
	Cylinder:	-10.00D ~ + 10.00D (0.12/0.25D step)
		(0.12/0.25D step)
	Axis	0 ~ 180° (1° step)
	Minimum measurable pupil size	2.0mm
	PD measurement range	10~85mm
Keratometry (ARK-910 model only)	Corneal curvature radius:	5～10mm (0.01mm step)
	Keratometry:	33.75～67.50D(0.12/0.25D step)
	Astigmatism:	0.00～±15.00D(0.12/0.25D step)
	Axis:	0～180° (1° step)
	Corneal diameter:	2.0～12.00mm
Others	Monitor:	7-inch Color LCD
	Printer:	Thermal printer
	Export:	RS232/Bluetooth
	Power:	100 ~ 240V AC 50/60Hz, 75VA
	Size:	487mm*262mm*467mm
	Weight:	17.2kg

Designs and specification can be changed without prior notice for the purpose of improvement.

Ningbo Ming Sing Optical R&D Co.,Ltd
Tel: +86 574 87305541
E-mail: info@nbmingsing.com Website: www.i-optik.com
Address: No.365 Middle Jingu Road(west), Ningbo, Zhejiang, China