

# **DEVELOPMENT OF THE TIMING SYSTEM FOR THE BUNCH-TO-BUCKET TRANSFER BETWEEN THE FAIR ACCELERATORS**

Vom Fachbereich  
Institut für Angewandte Physik  
der Goethe-Universität, Frankfurt am Main  
zur Erlangung des akademischen Grades  
eines Doktor der Naturwissenschaften  
genehmigte Dissertation

Von  
**Jiaoni Bai**  
geboren am 9. November 1986 in Taiyuan, Shanxi Province, China

Referent: Prof. Dr.  
Korreferent: Prof. Dr.  
Tag der Einreichung: Date. Month Year  
Tag der mündlichen Prüfung: Date. Month Year

Darmstadt 2016

---

I would like to dedicate this dissertation to my dear parents,  
loving husband and good friends ...

# Acknowledgement

First and foremost, I would like to thank my professor Prof. Dr. Oliver Kester. It is a great honour for me to be his Ph.D. student. He gave me the chance to study at Goethe Universität, Frankfurt am Main and work in GSI for this interesting Ph.D. topic. I appreciate all his contributions of time and ideas to make my Ph.D. successful. I was deeply influenced by his enthusiasm for his research and his selfless support for his students. I was thankful for his support, that I participated many international conferences, schools and workshops. This experience enriched my life and broadened my horizons.

I wish to express my sincere gratitude to Dr. David Ondreka and Dr. Dietrich Beck for their supervision, valuable guidance and helpful suggestions throughout my Ph.D. study. I have been greatly lucky to have so good supervisors, who cared much about my work and who answered my doubts patiently. They were like a lighthouse in the ocean, which guides me in the right direction. They are not only my scientific supervisors, but also my mentors. They encouraged and motivated me during tough time of my Ph.D. Hence, I will keep a positive attitude and keep moving forward when I face with challenges, difficulties and temporary setbacks in the future.

I would like to acknowledge all colleagues in the timing group, CSCO department, GSI, Mathias Kreider, Stefan Rauch, Marcus Zweig, Alexander Hahn and former employee Dr. Wesley Terpstra, who provided me much technical support. I would like to extend my appreciation to department leader Dr. Ralph Bär, who gave much support for my Ph.D. topic. Thanks for their friendship and collaboration. I am especially grateful for the group member Cesar Prados, by whom I learned not only technical knowledge, but also how to work efficiently and how to become a good engineer. I would also like to thank Matthias Thieme, who provided me the devices for the test setup and Marko Stanislav Mandakovic for the discussion about the MPS. I would like to extend gratitude to Dr. Udo Krause and Peter Kainberger for the information about the GSI control system.

I am also thankful for the good cooperation with Thibault Ferrand, who studies at Technische Universität Darmstadt and works in PBRF department, GSI. Thanks for his valuable contribution of the development of the LLRF system for the B2B transfer system for FAIR. I would like to extend my sincerest thanks and appreciation to PBRF department leader Prof. Dr. Ing. Harald Klingbeil for his support. In addition, a special thanks is also extended to Dr. Dieter Lens and Stefan Schäfer for their technical support. Thanks for Dr. Bernhard Zipfel to give me support about BuTiS.

I wish to express my sincere gratitude to SBES department leader Dr. Markus Steck for his technical support of ESR and CRYRING, Dr. Udo Blell in PBHV department for the technical support of kicker and Dr. Michael Block in SHE-P department for the supply of two SRS function generators.

---

I must express my gratitude to GSI and also HGS-HiRe, who provided the scholarship which allowed me to undertake this research.

Lastly, I would like to thank my family for all their love and encouragement. My parents always support me to pursuing my dreams. Most of all, my loving husband Zigao Li is so appreciated, who always encourages me to realize my dreams. Thank you.

Jiaoni Bai  
Darmstadt, September 2016

# Abstract

This dissertation contributes to the conceptual development, the systematic investigation, the timing system realization of the FAIR Bunch-to-Bucket (B2B) transfer system and its application to FAIR accelerators.

FAIR, the Facility for Antiproton and Ion Research, is a new international particle accelerator facility under construction at GSI Helmholtz center for Heavy Ion Research GmbH. It is aiming at providing high-energy beams of ions from proton to uranium with high intensities, as well as beams of rare isotopes and beams of antiprotons. The FAIR accelerator complex in its full version consists of many circular accelerators with different functionality. The circular accelerators are connected by transfer beamlines. Hence, the FAIR B2B transfer system plays an important role, achieving various complex bunch-to-bucket transfer between the FAIR accelerators in the future. It focuses first of all on the transfer from the SIS18 to the SIS100, but it will be firstly tested at GSI on the transfer from the SIS18 to the ESR and from the ESR to the CRYRING. The system is developed based on the existing technical basis, the low level rf system and the FAIR control system. It coordinates with the Machine Protection System, which protects synchrotrons from unacceptable failure or situation. Besides, it indicates the beam status and the actual beam injection time for the Beam Instrumentation.

This dissertation first of all presents the basic idea, the basic procedure of the FAIR B2B transfer system and makes a realization proposal with the consideration of the timing aspects. Secondly the systematic investigation of the system is done. Because the system focuses first of all on the transfer from the SIS18 to the SIS100, the beam dynamic of the B2B transfer from the SIS18 to the SIS100 is simulated for both the phase shift and the frequency beating methods. In addition, the SIS18 extraction and SIS100 injection kickers are analyzed for different triggering strategies. This dissertation also explains the time constraints of the system, the accuracy of the start of the synchronization window and characterization of the network for the FAIR B2B transfer system. Finally, a test setup focusing mainly on the timing aspects is introduced and the test result is presented.

In order to find the correct trigger time for the kickers, the FAIR B2B transfer system is composed of two synchronization processes, a coarse synchronization and a fine synchronization. The coarse synchronization gives a coarse time frame, within which bunches are transferred into buckets with a bunch-to-bucket center mismatch smaller than a upper bound. This time frame is called the “synchronization window”. With the synchronization window, the extraction and injection kicker magnets must be fired at the correct time in order to transfer bunches into correct empty buckets. The process of the kicker firing at the correct time is the “fine synchronization”.

The coarse synchronization is based on the measurement of the radio frequency

---

(rf) phase difference between the two rf systems of two ring accelerators, which is obtained by means of a campus-wide distributed reference signal with picosecond precision. When the circumference ratio between the source and target synchrotrons is an integer, the phase difference between the two rf systems is constant during the transfer. In order to get the correct phase difference, an azimuthal position of bunches in the source synchrotron or buckets in the target synchrotron must be adjusted. This is called “phase shift method”. After the phase shift, the phase difference between the two rf systems is correct and the synchronization window is infinite theoretically. When the circumference ratio is not an integer, the phase difference between the two rf systems varies periodically. Within one period, there must be one time point when the phase difference is the target one. Before and after this time point, there exists the mismatch between bunches and buckets. This is called ”frequency beating method”. The fine synchronization is achieved based on a bucket indication signal, which indicates the first bucket, plus a fixed delay. The bucket indication signal is derived from the radio frequency revolution frequency signal. A fixed delay is used to delay the bucket indication signal to point the correct empty buckets.

For the FAIR B2B transfer system, there exists a “B2B transfer master”. It is responsible for the following functions.

- The data collection (e.g. the rf phase).
- The data calculation (e.g. the start of the synchronization window, the required phase shift for the goal phase difference between the two rf systems, the phase correction for the bucket indication signal and etc).
- The data redistribution (e.g. the start of the synchronization window).
- The B2B transfer status check.

# Kurzfassung

Die vorliegende Doktorarbeit beschäftigt sich mit der konzeptionellen Entwicklung, der Realisierung des Timing Systems und der systematischen Untersuchung des Bunch-to-Bucket (B2B) Transfer Systems für die geplante FAIR-Beschleunigeranlage und deren Synchrotrons.

FAIR, “Facility for Antiproton and Ion Research“, ist eine im Bau befindliche, internationale Teilchenbeschleunigeranlage, die unter der Leitung von GSI Helmholtzzentrum für Schwerionenforschung GmbH errichtet wird. Sie hat zum Ziel, hochenergetische Teilchenstrahlen aus Ionen zu erzeugen. Es wird nicht nur möglich sein, die Elemente des Periodensystems von Wasserstoff bis Uran zu beschleunigen, sondern auch sehr exotische Ionen, wie Antiproton oder auch seltene Isotope mit hohen Intensitäten. Der FAIR-Beschleunigerkomplex besteht aus vielen Synchrotrons mit unterschiedlichen Funktionalitäten und Aufgaben. Alle FAIR Synchrotrons sind über Transferkanäle miteinander verbunden, über die ein Teilchenaustausch mit nahezu Lichtgeschwindigkeit ermöglicht wird. Das FAIR B2B Transfer System spielt daher eine zentrale Rolle, beim komplexen Transfer von Teilchenpaketen in umlaufende Buckets, bei allen zukünftigen FAIR-Synchrotrons. Das System konzentriert sich zunächst auf den Teilchentransfer vom SIS18 zum SIS100. Dieser wird vorab am Beispiel des Transfers zwischen SIS18 zum ESR und vom ESR zum CRYRING getestet. Das System wird auf Basis der für FAIR vorgesehenen, technischen Infrastruktur entwickelt. Dazu zählen das FAIR-Low-Level Radio-Frequency (LLRF) System und das Kontrollsyste für FAIR. Das FAIR B2B Transfer System hat eine Schnittstelle zum FAIR-Maschinenschutzsystem (Machine Protection System), um die Synchrotrons vor erheblichen Strahlverlust und dadurch bedingt vor Schaden zu bewahren. Außerdem wird der Status des Strahls und der Zeitpunkt der Strahlinjektion vom FAIR B2B Transfer System an die Geräte der Strahldiagnose gemeldet.

Die Dissertation stellt vor allem die Grundidee und das grundlegende Verfahren FAIR B2B Transfer System vor und macht einen Realisierungsvorschlag, der die Timing-Anforderungen berücksichtigt. Danach wird eine systematische Untersuchung des Systems durchgeführt. Da sich das System zunächst auf den Transfer vom SIS18 zum SIS100 konzentriert, werden die strahldynamischen Auswirkungen im Fall der “phase shift method“ und der “frequency beating method“ untersucht. Zusätzlich werden verschiedenen TriggerStrategien für den SIS18 Extraktion- und SIS100 Injektion Kickern analysiert. Diese Arbeit untersucht auch die Timing-Anforderungen an das System, die Genauigkeitsanforderung an den Startzeitpunkt des Synchronisationsfensters und es wird das Netzwerk für das FAIR B2B Transfer System charakterisiert. Zum Schluss wird ein Testaufbau für das System vorgestellt, der hauptsächlich das Timing des FAIR B2B Transfer Systems überprüft. Die Messergebnisse werden ausgewertet und vorgestellt.

Das FAIR B2B Transfer System nutzt einen zweistufigen Synchronisationsprozess,

---

um den exakten Kickzeitpunkt zu bestimmen. In der ersten Stufe, der Grobsynchronisation gibt ein Synchronisationsfenster ein Zeitintervall vor, indem der Mittenversatz zwischen Teilchenpaketen und Buckets innerhalb der geforderten Toleranzgrenze ist. Innerhalb dieses Synchronisationsfensters müssen nun die Kicker zum richtigen Zeitpunkt gezündet werden, um die Teilchenpakte in die leeren Buckets zu schießen. Das übernimmt die Feinsynchronisation. Hierzu wird ein HF Signal benutzt, um die genaue Position der Teilchenpakte zu bestimmen und die Kicker präzise zum richtigen Zeitpunkt zünden.

Für die Grobsynchronisation wird die Phasendifferenz zwischen den Hochfrequenzsignalen (HF) des Quell- und Ziel-Synchrotrons gemessen. Das wird erreicht, indem man die HF-Signale beider Synchrotrons gegen ein campusweit verteiltes, im Pikosekundenbereich genaues Referenzsignal vermisst. Ist das Zahlenverhältnis der Umfänge beider Synchrotrons ein Integer, so bleibt die Phasendifferenz der beiden HF-Signal während des Transfers konstant. Um die richtige Phasendifferenz zu erreichen, ist dann lediglich eine azimutale Positionierung der Teilchenpakte im Quellsynchrotron oder der Buckets im Zielsynchrotron erforderlich. Das nennen wir die “phase shift method“. Nach der exakten Positionierung, bleibt die Phasenverschiebung somit konstant und ermöglicht theoretisch ein unendlich langes Synchronisationsfenster. Wenn das Zahlenverhältnis kein Integer ergibt, verändert sich die Phasendifferenz periodisch. Innerhalb einer Periode gibt es dann nur einen Zeitpunkt, zu dem die Zielphase erreicht wird. Davor und danach kommt es zu einem Mittenversatz zwischen Teilchenpaket und Bucket. Das nennen wir die “frequency beating method“. Die Feinsynchronisation wird über ein “bucket indication signal“ erreicht. Das erste Bucket wird über das HF-Signal gekennzeichnet und die folgenden Buckets werden über eine feste Verzögerungszeit ausgezählt. Das FAIR B2B Transfer System sieht einen “B2B transfer master“ mit folgender Funktionalität vor.

- Die Datenakquise (z.B. die HF-Phasen).
- Die Datenberechnung (z.B. der Beginn des Synchronisationsfensters, die Ermittlung der erforderlichen Zielphasendifferenz zwischen zwei HF Systemen, die Berechnung der Phasenkorrektur für das BucketIndikationssignals, etc.).
- Die Verteilung von Daten (z.B. Start des Synchronisationsfensters).
- Die Überprüfung des B2B Transfer Status.

# Contents

<b>Abstract</b>	<b>v</b>
<b>1 Introduction</b>	<b>1</b>
1.1 Bunch-to-Bucket Transfer worldwide . . . . .	4
1.2 Objectives, Contribution and Structure of the Dissertation . . . . .	6
<b>2 Theoretical Background</b>	<b>8</b>
2.1 Bunch and Bucket . . . . .	8
2.2 Phase Difference . . . . .	14
2.2.1 Circumference Ratio is an Integral . . . . .	16
2.2.2 Circumference Ratio is close to an Integer . . . . .	17
2.2.3 Circumference Ratio is far away from an Integer . . . . .	18
2.3 Phase Match of two Rf Systems . . . . .	20
2.3.1 Phase Shift Method . . . . .	21
2.3.2 Frequency Beating Method . . . . .	24
2.4 Synchronization of Extraction and Injection Kicker Magnets . . . . .	26
<b>3 Technical Basis for FAIR B2B Transfer System</b>	<b>30</b>
3.1 FAIR Control System . . . . .	30
3.1.1 Bunch Phase Timing System . . . . .	30
3.1.2 General Machine Timing System . . . . .	31
3.1.3 Settings Management . . . . .	31
3.1.4 FESA . . . . .	32
3.2 Low-Level RF System . . . . .	32
3.2.1 Local Cavity Synchronization . . . . .	33
3.2.2 Longitudinal Feedback System . . . . .	34
3.3 Machine Protection System . . . . .	34
<b>4 Concept of FAIR B2B Transfer System</b>	<b>36</b>
4.1 Basic Idea . . . . .	36
4.1.1 Phase Alignment . . . . .	36
4.1.2 Trigger of Extraction and Injection Kickers . . . . .	38
4.1.2.1 Bucket Indication Signal . . . . .	39
4.1.2.2 Extraction and Injection Kicker Delay Compensation	39
4.2 Basic Procedure . . . . .	41
4.3 Realization . . . . .	41
4.3.1 Phase Measurement and corresponding Timestamp of each Rf System . . . . .	45
4.3.1.1 Measurement of Actual Phase Values of each Rf System	45

## CONTENTS

---

4.3.1.2	Phase Extrapolation of each Rf System . . . . .	46
4.3.1.3	Timestamp of Extrapolated Phase . . . . .	46
4.3.2	Exchange of Measured Data . . . . .	48
4.3.3	Rf Synchronization . . . . .	49
4.3.3.1	Rf Synchronization with Phase Shift Method . . . . .	50
4.3.3.2	Rf Synchronization with Frequency Beating Method	51
4.3.4	Coarse Synchronization . . . . .	52
4.3.5	Bucket Label . . . . .	53
4.3.6	Bucket Label for the normal Extraction and Injection . . . . .	54
4.3.7	Bunch Gap Label for Emergency Extraction . . . . .	55
4.3.8	Fine Synchronization of Extraction and Injection Kickers . . . . .	56
4.3.9	B2B Transfer Status Check . . . . .	57
4.4	Data Flow . . . . .	58
4.5	Comparison between FAIR B2B Transfer System and current B2B Transfer . . . . .	59
<b>5</b>	<b>Realization and systematic Investigation of FAIR B2B Transfer System</b>	<b>63</b>
5.1	Beam Dynamic Analysis of two Synchronization Methods for B2B Transfer from SIS18 to SIS100 . . . . .	63
5.1.1	Beam Dynamics of Phase Shift Method for $U^{28+}$ . . . . .	64
5.1.1.1	Longitudinal Dynamic Analysis for Frequency Modulation . . . . .	67
5.1.1.2	Transverse Dynamics Analysis . . . . .	70
5.1.2	Beam Dynamics of Frequency Beating Method for $U^{28+}$ . . . . .	71
5.1.2.1	Longitudinal Dynamics Analysis . . . . .	71
5.1.3	Beam Dynamics of Phase Shift Method for $H^+$ . . . . .	71
5.1.3.1	Longitudinal Dynamics Analysis . . . . .	71
5.1.3.2	Transverse Dynamics Analysis . . . . .	72
5.1.4	Beam Dynamics of Frequency Beating Method for $H^+$ . . . . .	73
5.1.4.1	Longitudinal Dynamics Analysis . . . . .	73
5.2	GMT systematic Investigation . . . . .	73
5.2.1	Calculation of the Start of the Synchronization Window . . . . .	73
5.2.1.1	Uncertainty of Phase Alignment . . . . .	74
5.2.1.2	Uncertainty of the Start of the Synchronization Window . . . . .	75
5.2.1.3	Accuracy of the Start of the Synchronization Window	77
5.2.2	Characterization of WR Network . . . . .	77
5.2.2.1	Requirement of B2B Traffic . . . . .	79
5.2.2.2	WR Network Test Setup . . . . .	80
5.2.2.3	Test Result of Frame Error Rate . . . . .	80
5.2.2.4	Test Result of Frame Transfer Latency . . . . .	82
5.2.2.5	Conclusion . . . . .	83
5.3	Kicker systematic Investigation . . . . .	84
5.3.1	SIS18 Extraction Kicker . . . . .	85
5.3.2	SIS100 Injection Kicker . . . . .	86
5.4	Test Setup for Data Collection, Merging and Redistribution . . . . .	87
5.4.1	Functionality of the Test Setup . . . . .	87

---

## CONTENTS

---

5.4.2	Test Setup . . . . .	88
5.4.3	Firmware . . . . .	90
5.4.4	Time Constraints . . . . .	93
5.4.5	Test Result . . . . .	96
<b>6</b>	<b>Application of FAIR B2B Transfer System to FAIR Accelerators</b>	<b>97</b>
6.1	Circumference Ratio is an Integer . . . . .	98
6.1.1	Use Case of $U^{28+}$ B2B Transfer from SIS18 to SIS100 . . . . .	100
6.1.2	Use Case of $H^+$ B2B Transfer from SIS18 to SIS100 . . . . .	100
6.2	Circumference Ratio is close to an Integer . . . . .	102
6.2.1	Use Case of $h=4$ B2B Transfer from SIS18 to ESR . . . . .	103
6.2.2	Use Case of $h=1$ B2B Transfer from SIS18 to ESR . . . . .	104
6.2.3	Use Case of B2B transfer from ESR to CRYRING . . . . .	104
6.3	Circumference Ratio is far away from an Integer . . . . .	106
6.3.1	Use Case of $H^+$ B2B Transfer from SIS100 to CR . . . . .	106
6.3.2	Use Case of RIB B2B Transfer from SIS100 to CR . . . . .	108
6.3.3	Use Case of B2B Transfer from CR to HESR . . . . .	108
6.3.4	Use Case of RIB B2B Transfer from SIS18 to ESR via the FRS109	
6.4	Summary of Formulas related to B2B Transfer . . . . .	111
<b>7</b>	<b>Conclusion and Outlook</b>	<b>115</b>
<b>A</b>	<b>Glossaries, Abbreviations and Symbols</b>	<b>118</b>
	Glossary	119
	Abbreviations	123
	Symbols	127
<b>B</b>	<b>FAIR B2B Transfer related Timing Frames</b>	<b>133</b>
<b>C</b>	<b>Timing Frames Transfer for FAIR B2B Transfer System</b>	<b>135</b>
<b>D</b>	<b>Parameters of FAIR Use Cases</b>	<b>137</b>
D.1	Parameters related to the B2B transfer from the SIS18 to the SIS100	137
D.2	Parameters related to the B2B transfer from the SIS18 to the ESR . .	138
D.3	Parameters related to the B2B transfer from the SIS18 to the ESR via the FRS . . . . .	139
D.4	Parameters related to the B2B transfer from the ESR to the CRYRING	140
D.5	Parameters related to the B2B transfer from CR to HESR . . . . .	141
D.6	Parameters related to the B2B transfer from the SIS100 to the CR . .	142
<b>E</b>	<b>Parameters of FAIR B2B Transfer System from Settings Management</b>	<b>143</b>
<b>F</b>	<b>Parameters of kicker magnets</b>	<b>145</b>
	Bibliography	145
	List of Figures	147

---

## **CONTENTS**

---

<b>List of Tables</b>	<b>151</b>
<b>Publications</b>	<b>152</b>

# Chapter 1

## Introduction

Beams of high energy particles are useful for both fundamental and applied research in the science, and also in many technical and industrial fields unrelated to fundamental research. It has been estimated that there are approximately 30000 accelerators worldwide. Only about 1% of them are research machines with energies above 1 GeV [? ]. As we all know, particles are accelerated by electric fields. The radio frequency (rf) system of an accelerator is devoted to generate the electric field at rf cavities around the ring. Particles are accelerated when they pass through rf cavities in the right phase. Every rf cavity has a limited frequency range, so particles at rest could not be accelerated to several tens of GeV energy in one ring accelerator. Hence, the acceleration must be divided into several energy stages: The first energy stage is achieved usually by a linear accelerator followed by a small ring, which is called “booster” and the second stage by a large ring, which is usually called “main ring”. The maximum energy of a beam is related to the ‘magnetic rigidity’ of the dipole magnet, which is the multiplication of the magnetic field and the bending radius of a particle immersed in the magnetic field. At the time of the beam transfer, the magnetic rigidity of the booster must be equal to that of the main ring. Since the bending radius of the main ring is generally larger than that of the booster, the magnetic field in the main ring starts the further acceleration at a lower level. This allows a continuous increasing of the particle energy until the limits of the dipole magnets of the main ring are reached. The usage of the booster and the main ring works faster to reach the required beam energy, because the booster can be filled and accelerated, when the main ring accelerates particles. The faster acceleration has the advantage to reduce the interaction time between the accelerated particles and the residual-gas atoms in the vacuum chamber, achieving a better beam quality [? ]. Furthermore, the particle beam transfer among different rings is also used for the production of high intensity beam, e.g. the beam is transferred to a storage ring for the beam accumulation and beam compression. Hence, the transfer of beam between rings is of great importance for high energy, high intensity and high quality beams.

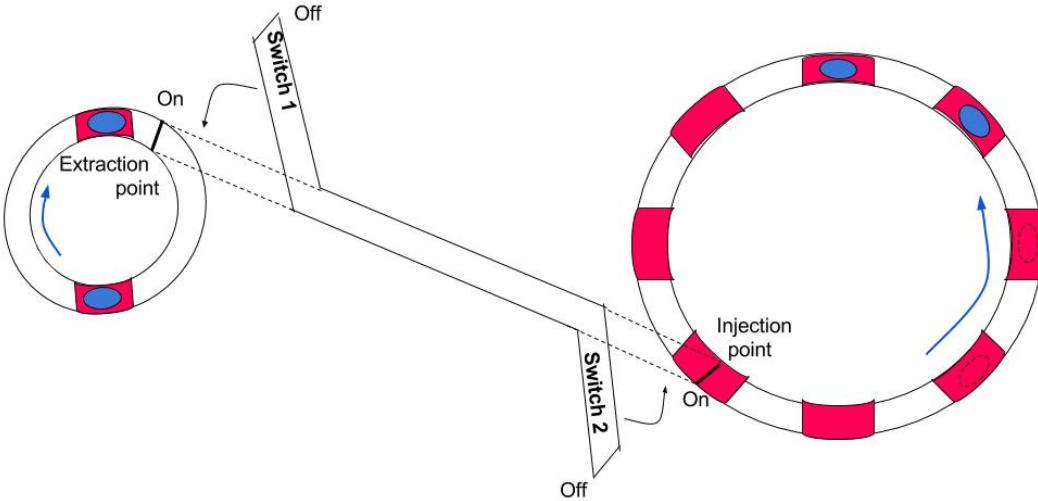


Figure 1.1: Illustration of a bunch-to-bucket transfer.

*Red rectangles represent buckets and blue dots bunches.*

ESR

The beam transfer is not arbitrary. A bunch of particles running in a ring should be transferred into the correct position of another ring. Fig. 1.1 illustrates the transfer of a bunch of particles between two rings. The example in Fig. 1.1 is with the circumference ratio between the right and left rings of four. Bunches of particles are transferred from the left ring to the right one. The blue ellipse represents a bunch of particles and the red rectangle represents the allowable area for particles to be injected. The red rectangles are equally spaced around the ring and determined by the rf frequency. The white space between two red rectangles is forbidden for particles. The allowable area (red rectangle) for particles is termed as a “bucket” and a bunch of particles (blue ellipse) as a “bunch”. The definition of a bunch and a bucket from the accelerator physics perspective, please see Chap. 2. There are two buckets at the left ring and every bucket keeps a bunch. There are eight buckets in the right ring and two of them are filled with bunches. The left ring is connected to a transfer beamline by a switch, which is called a “switch 1”. When the switch 1 is off, bunches circulate around the ring. When it is on, bunches will be guided from the ring to the transfer beamline at a specific position around the ring, which is called the “extraction point” (represented as a black short bar on the left ring). The transfer beamline is connected to the right ring by another switch, called a “switch 2”. When the switch 2 is on, bunches will be guided from the transfer beamline to the right ring at a specific position around the ring, which is called the “injection point” (represented as a black short bar on the right ring). Generally both switches are off. The bunch-to-bucket (B2B) transfer is defined as that bunches of the left ring are transferred to the correct buckets at the right ring. For the B2B transfer, bunches at the left ring and buckets at the right ring must have not only a constant but same velocity. Because the circumference of the right ring is four times longer than that of the left ring, bunches run four cycles of the left ring when buckets run one cycle of the right ring. The distance between two bunches of the left ring is equal to the distance between two continuous buckets of the right ring. Besides, the relative position between bunches and buckets must

## CHAPTER 1. INTRODUCTION

---

match. Bunches of the left ring are guided to the transfer beamline and transferred to the right ring. They are guided exactly to two empty buckets of the right ring. Every time when a bunch of the left ring passes by the extraction point, a bucket of the right ring will pass by the injection point after a specific time delay, which equals to the time-of-flight of a bunch in the transfer beamline. What's more, the time for the beam guide in the transfer beamline is of great importance, determining which buckets to be filled. In Fig. 1.1, two empty buckets closely following the filled buckets of the right ring need to be filled (represented as the dotted ellipse). The switch 2 must be switched on when the first empty bucket following two filled buckets passes the injection point and the switch 1 must be switched on a specific time earlier, when a bunch passes by the extraction point.

The ring is called a “source ring”, from which the beam is extracted. The ring is called a “target ring”, into which the beam is injected. From the above illustration, several preconditions are compulsory for the B2B transfer. The first precondition is that bunches of the source ring and buckets of the target ring have a constant speed, namely the revolution frequencies of the two rf systems of the source and target rings must be constant and therewith the constant cavity rf frequencies, which are harmonics of the revolution frequencies. Beam feedback loops on the rf system are usually implemented in order keep the stability of the beam. The constant revolution frequency requires that the beam feedback loop must be switched off before the B2B transfer. The second precondition is that bunches and buckets are with a same speed, which requires that the revolution frequency ratio between two rings is equal to the reciprocal of the circumference ratio. When the circumference ratio between two rings is an integer, the phase difference between two revolution frequencies is constant. It means that bunches always pass the extraction position a constant time earlier/later before/after buckets pass the injection position. But the constant phase difference is not correct for the transfer. In order to get the correct phase difference, an azimuthal positioning of bunches in the source ring or buckets in the target ring must be adjusted. This is called “phase shift method”. After the phase shift, the phase difference of two revolution frequencies is correct and the correct phase difference stays for an infinite time theoretically. Because beam feedback loops are switched off, the beam is stable only for a short period of time. So the beam must be transferred as soon as possible. When the circumference ratio is not an integer, the phase difference between two revolution frequencies of particles orbiting in the rings varies periodically. Within one period, there must be one point in time when the phase difference between the two rf systems is correct. Before and after this time point, there exists the mismatch between bunches and buckets. The earlier and later than this time point within a period, the larger the mismatch. Waiting for the phase difference to match is called “frequency beating method”. For both the phase shift and frequency beating methods, the transfer can only happen when the mismatch is smaller than a tolerable limit, introducing a time frame. The time frame is called the “synchronization window”, which achieves the “coarse synchronization” between the machines.

Bunches are switched from one path to another path by kicker magnets (short: kicker). The extraction kicker kicks bunches out of the source ring to the transfer beamline and the injection kicker kicks them from the transfer beamline into buckets of the target ring. They are located at the extraction position and injection position in Fig. 1.1. When the phase difference between the two rf systems is correct, the

## 1.1. Bunch-to-Bucket Transfer worldwide

---

extraction kicker could kick bunches out of the source ring at the exact time-of-flight to the transfer beamline before empty buckets pass the injection kicker. With the synchronization window, the extraction and injection kickers must be fired at the correct time in order to transfer bunches into correct empty buckets. The process of the kicker firing at the correct time is termed as the “fine synchronization”.

### 1.1 Bunch-to-Bucket Transfer worldwide

Nowadays, there are several accelerator institutes in the world, who operate the B2B transfer among rings for specific purposes. CERN, the European Organization for Nuclear Research, is one of the world’s largest and most respected center for scientific research. The Large Hadron Collider (LHC) beam injection chain achieves the proton beam with the energy of 7 TeV. After accelerated by a linear accelerator, bunches are injected into buckets of the Proton Synchrotron Booster (PSB) and further into the Proton Synchrotron (PS), the Super Proton Synchrotron (SPS) and LHC [? ]. For the LHC heavy ion beam injection chain with the achievement of the energy of 2.76 TeV/u, bunches are first of all injected into the Low Energy Ion Ring (LEIR) and the following transfer from PSB to LHC is same as the proton beam chain [? ]. For Japan Proton Accelerator Complex (J-PARC), bunches are transferred from the Rapid Cycle Synchrotron (RCS) to buckets of the Main Ring (MR) [? ]. The Booster of Brookhaven National Laboratory (BNL) transfers bunches to buckets of the Alternating Gradient Synchrotron (AGS) and bunches of AGS are transferred further into the Relativistic Heavy Ion Collider (RHIC) [? ]. Fermi National Accelerator Laboratory (Fermilab)’s accelerator complex provides high energy proton beams for a broad range of experiments. Proton beams are injected into the Recycler from the Fermi National Accelerator Laboratory (Fermilab) Booster. Then the proton beam enters the Main Injector from the Recycler. The beam is accelerated to the energy of 120 GeV. Some of the proton beam from the Booster will be used to produce a beam of special particles for Muon Delivery Ring. The Muon Delivery Ring delivers the beam into a muon storage ring for further study [? ]. Institute of Modern Physics of the Chinese Academy of Sciences (IMP) operates the Heavy Ion Research Facility (HIRFL) in Lanzhou. Two existing cyclotrons, the Sector Focusing Cyclotron (SFC) and the Separated Sector Cyclotron (SSC), are used as an injector system for the Cooler Storage Ring main ring (CSRm) for the accumulation, cooling and acceleration. Then the beam is extracted from CSRm to produce radioactive ion beams or highly-charged heavy ions, which can be transferred to the Cooler Storage Ring experimental ring (CSRe) for many experiments [? ? ].

FAIR, the Facility for Antiproton and Ion Research, is a new international accelerator facility under construction at GSI Helmholtz center for Heavy Ion Research GmbH (short: GSI)<sup>1</sup> [? ? ]. It is aiming at providing high-energy beams of ions from antiproton to uranium with high intensities. The new FAIR accelerator complex in its full version will consist of the SIS100<sup>2</sup>, the SIS300<sup>3</sup>, the Collector Ring (CR), the Recycled Experimental Storage Ring (RESR), the New Experi-

---

<sup>1</sup>Planckstrasse 1, 64291 Darmstadt, www.gsi.de

<sup>2</sup>SIS18 stands for SchwerIonen Synchrotron (100 Tm magnetic rigidity).

<sup>3</sup>SIS300 stands for SchwerIonen Synchrotron (300 Tm magnetic rigidity).

## 1.1. Bunch-to-Bucket Transfer worldwide

---

tal Storage Ring (NESR) and the Hign Energy Storage Ring (HESR) [? ? ]. FAIR has so many rings, so the B2B transfer among FAIR ring accelerators is of great importance to accelerate beams to higher energy with high intensity and achieve beams for various experiments. Based on the existing GSI UNILAC and SIS18 serving as injectors, high intensity ion beams over the whole range of stable isotopes will be accelerated in the new heavy ion machine SIS100/SIS300 to higher energy. The beam from the SIS100 will be transferred to the CR via the antiproton bar (Pbar)<sup>4</sup> or the Superconducting Fragment Separator (Super-FRS)<sup>5</sup>. The CR has the purpose of stochastic cooling of both secondary rare isotope and antiproton beams and of measuring nuclear masses [? ? ]. The CR transfers the beam to the HESR and further to the RESR for the accumulation. The HESR serves experiments with high energy antiproton and rare isotope beams [? ]. The proton and heavy ion beams could also be transported from the SIS18 to the existing GSI Experimental Storage Ring (ESR) and further to the first FAIR-storage ring CRYRING@ESR (short: CRYRING) for the atomic and nuclear physics experiment [? ? ]. The proton and heavy ion could also be transferred from SIS18 to ESR via the Fragment Separator (FRS)<sup>6</sup>.

For many FAIR accelerator pairs, the circumference ratio between the large and small rings is an integer, e.g. the SIS100 and the SIS18, so the phase difference between two revolution frequencies of rings is constant. The frequency is in the MHz range. In this scenario, the phase shift method must be used for the match of the phase difference between the two rf systems. When the circumference ratio between FAIR accelerator pairs is not an integer, e.g. the SIS18 and the ESR<sup>7</sup>, the phase difference between two revolution frequencies shifts automatically. The frequency of the phase difference variability is in the kHz range. The synchronization window for the FAIR B2B transfer is in the  $\mu$ s range. The beams of ion species, from hydrogen to uranium as well as antiproton and rare isotope beams, should be transferred among all rings. And every transfer must be achieved within the upper bound 10 ms and the B2B injection mismatch in the range between  $-1^\circ$  and  $+1^\circ$ . Both the phase shift and the frequency beating method should be applicable in the upcoming FAIR facilities. The B2B transfer system is designed to work in a parallel operation, e.g. the transfer from SIS18 to SIS100 and the transfer from ESR to CRYRING can be performed at the same time. It is capable to transfer the beam between two rings via the FRS or the Super FRS. The B2B transfer system must coordinate with the SIS100 emergency dump for all unacceptable failure or situation.

---

<sup>4</sup>Pbar is used to produce antiprotons in inelastic collisions of high energy protons with nucleons of a target nucleus.

<sup>5</sup>Super-FRS is used to produce rare isotopes of all elements up to uranium at relativistic energies and spatially separate them within a few hundred nanoseconds.

<sup>6</sup>An ion-optical device used to focus and separate products from the collision of relativistic ion beams with thin targets.

<sup>7</sup>ESR has an injection/extraction orbit, which is 15 cm longer than the design orbit. The orbit of ESR in this dissertation means the injection/extraction orbit.

## 1.2 Objectives, Contribution and Structure of the Dissertation

This dissertation contributes to the development of the FAIR B2B transfer system from the timing perspective. It concentrates on the introduction of the concept of the FAIR B2B transfer system and its application for FAIR accelerators. In addition, it explains the systematic investigation for the FAIR B2B transfer system in details.

The dissertation is structured as follows and as depicted in Fig. 1.2.

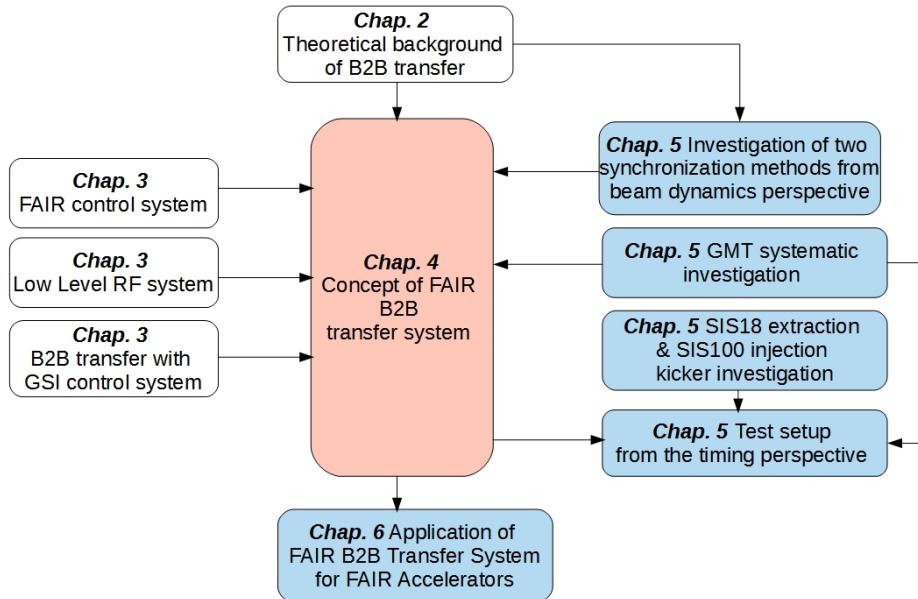


Figure 1.2: The structure of the dissertation.

*Contributions are marked blue and red is team work, existing systems or theory are not colored.*

In Chap.2, the theoretical background for the B2B transfer is reviewed. First of all, the energy, phase and voltage match between the source and target synchrotrons are introduced. Secondly, two rf synchronization methods are discussed from the perspective of beam dynamics for the phase alignment. At the end of this chapter, the synchronization of the extraction and injection kicker magnets are discussed.

Chap.3 is concerned with the existing FAIR technical basis for the development of the FAIR B2B transfer system and the uniqueness of the system. The B2B transfer system is realized based on the FAIR control system and low-level rf system, so these two systems are introduced. In addition, the comparison between the FAIR B2B transfer system and the current B2B transfer with the GSI control system is discussed before the chapter ends.

In Chap.4, a brief overview on the basic idea of the B2B transfer system is presented. After that the basic procedure of the FAIR B2B transfer is introduced and the realization of each step of the procedure is explained. In addition, the FAIR B2B transfer system is explained from the data flow perspective.

Chap.5 presents the systematic investigation for the B2B transfer system, mainly focusing on the timing aspect. The calculation of the synchronization window is

## **1.2. Objectives, Contribution and Structure of the Dissertation**

---

explained and the transfer of the B2B messages via the white rabbit (WR) network is tested. In addition, for the B2B transfer from the SIS18 to the SIS100, two synchronization methods are analyzed from the perspective of the beam dynamics. The SIS18 extraction and the SIS100 injection kicker are systematically investigated. Finally, the test setup is presented and the result is analyzed.

The application of the FAIR B2B transfer system for FAIR accelerator pairs are outlined in Chap.6. The applications are classified into three categories according to the feature of the circumference ratio. Many FAIR use cases are with an integral circumference ratio, e.g. the SIS18 and the SIS100, there is a constant phase difference between the two rf system. Although the phase shift can be used for the phase matching, the frequency beating method is preferred via the detune of one rf system. Because the phase shift must be executed slowly enough to guarantee the beam quality, which needs much longer time than the frequency beating method. The ratio of the circumference between many pair of machines in FAIR is close to an integer or far away from an integer, e.g. the SIS18 and the ESR, the SIS100 and the CR, the CR and the HESR. the phase matching is achieved by the frequency beating. For each category, the corresponding FAIR use cases are presented.

# Chapter 2

## Theoretical Background

In Chap. 1, the bunch and bucket are introduced with simplified definition. In this chapter, the bunch and bucket are first of all defined from the accelerator physics perspective in Sec. 2.1. Transferring bunches from a synchrotron into specific buckets of another synchrotron has several underlying basic principles. The energy of the beam is same before and after the B2B transfer, so the energy of the source synchrotron must match that of the target synchrotron. The amplitude of the accelerating voltage match of the two rf systems is needed to ensure that buckets capture bunches efficiently. Principally speaking, every synchrotron has its independent rf system. The phase difference between bunches and buckets must be precisely controlled before the transfer. The energy and voltage match will be done by machine physicists, which are out of the scope of this dissertation, so only the phase matching is explained in detail in Sec. 2.2. Two methods for the phase alignment between the two rf systems are discussed in Sec. 2.3. For the correct bucket injection, the bunch extraction must happen exactly the time-of-flight before the required bucket of the target synchrotron passes the injection kicker. The synchronization of extraction and injection kicker magnets are presented in Sec. 2.4.

### 2.1 Bunch and Bucket

For a ring accelerator, particles gain energy from electric field in longitudinal direction and are deflected by magnetic field to a particle orbit. A rf cavity operating at a resonance condition is used to provide a longitudinal accelerating voltage<sup>1</sup>  $u$  in the vacuum chamber.

$$u(t) = V_0 \sin(\phi_s + 2\pi f_{rf} t) \quad (2.1)$$

where  $V_0$  is the amplitude of the rf voltage,  $\phi_s$  is an initial phase, and  $f_{rf}$  is the frequency of the accelerating voltage. In order to accelerate particles with an accelerating voltage at the rf cavity, the cavity rf frequency must always be an integer multiple of the revolution frequency of particles.

$$f_{rf} = h f_{rev} \quad (2.2)$$

where the integer multiple  $h$  is called the “harmonic number“.

A particle who always sees the rf phase  $\phi_s$  at the rf cavity with the revolution frequency  $f_{rev}$  and the momentum  $p$  is called a “synchronous particle“. For circular

---

<sup>1</sup>Rf voltage with a single harmonic operation is considered in this dissertation.

## 2.1. Bunch and Bucket

---

accelerators, the revolution frequency is decided by the machine circumference and the particle velocity.

$$f_{rev} = \frac{\beta c}{2\pi R} \quad (2.3)$$

where  $R$  is the radius of the orbit  $R = L/2\pi$ ,  $L$  is the orbit length.  $\beta$  is the relative velocity to the speed of light and  $c$  the speed of light. The differential of eq. 2.3 is

$$\frac{\Delta f_{rev}}{f_{rev}} = \frac{\Delta\beta}{\beta} - \frac{\Delta R}{R} \quad (2.4)$$

Because of the relation  $\Delta f_{rf}/f_{rf} = \Delta f_{rev}/f_{rev}$ , so eq. 2.4 can be written as

$$\frac{\Delta f_{rf}}{f_{rf}} = \frac{\Delta\beta}{\beta} - \frac{\Delta R}{R} \quad (2.5)$$

The momentum of the synchronous particle  $p$  is related to the particle energy and its velocity.

$$p = \gamma\beta m_0 c \quad (2.6)$$

where  $m_0$  is the rest mass and  $\gamma = (1 - \beta^2)^{-\frac{1}{2}}$ .  $\gamma$  is the relativistic factor, which measures the total particle energy,  $E = pc/\beta$ , in units of the particle rest energy,  $E_0 = m_0 c^2$ .

The fractional change in  $\beta$  is related to the fractional change in  $p$ .

$$\frac{\Delta p}{p} = \gamma^2 \frac{\Delta\beta}{\beta} \quad (2.7)$$

Substituting  $\Delta\beta/\beta$  into eq. 2.5, we get

$$\frac{\Delta f_{rf}}{f_{rf}} = \frac{1}{\gamma^2} \frac{\Delta p}{p} - \frac{\Delta R}{R} \quad (2.8)$$

For the constant magnetic field, a particle will have a different orbit, if it is slightly shifted in momentum. The “momentum compaction factor”  $\alpha_p$  is defined as eq. 2.9. The FAIR complex is with  $\alpha_p > 0$ .

$$\frac{\Delta R}{R} = \alpha_p \frac{\Delta p}{p} \quad (2.9)$$

Substituting eq. 2.9 into eq. 2.8, we finally obtain the required relation between the frequency offset and the momentum error.

$$\frac{\Delta f_{rf}}{f_{rf}} = \left( \frac{1}{\gamma^2} - \alpha_p \right) \frac{\Delta p}{p} \quad (2.10)$$

The phase-slip factor  $\eta$  is defined as

$$\eta = \frac{1}{\gamma^2} - \alpha_p \quad (2.11)$$

which gives the relationship between the revolution frequency and the momentum for a given accelerator. When particles are at low energy ( $\eta > 0$ ), they run faster and arrive earlier at the rf cavity. When they are at high energy close to the speed

## 2.1. Bunch and Bucket

---

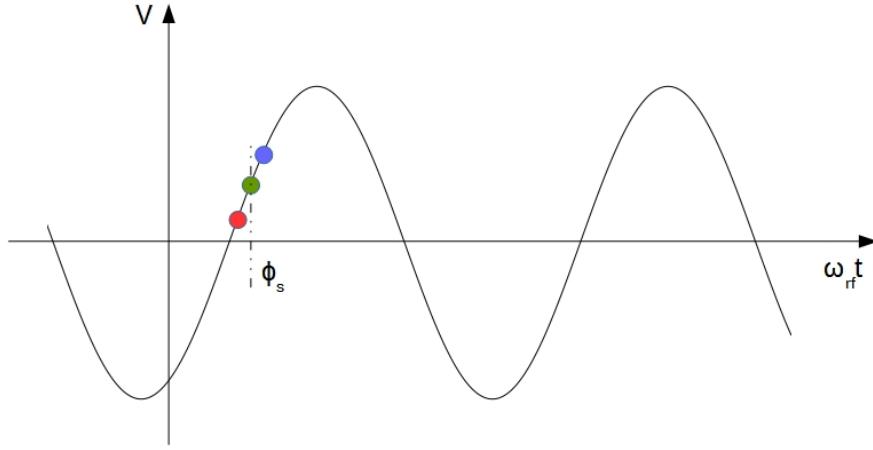


Figure 2.1: The longitudinal focusing of particles by a rf voltage ( $\eta > 0$ ).

The red spot represents a particle with a higher energy, the blue spot a particle with a lower energy and the green dot the synchronous particle.

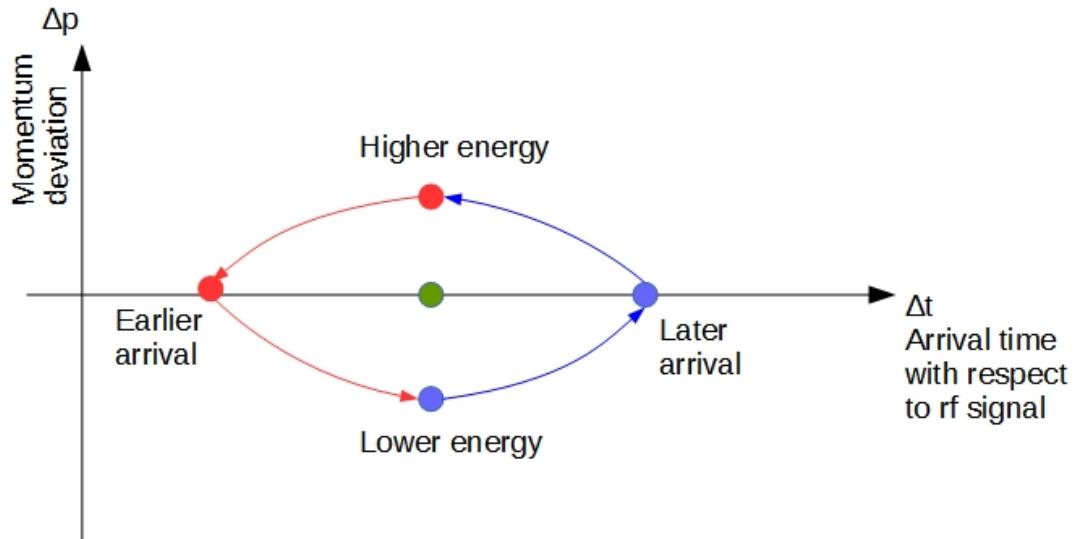


Figure 2.2: The longitudinal motion of asynchronous particles in the longitudinal phase space plane ( $\eta > 0$ ).

The red spot represents a particle with a higher energy, the blue spot a particle with a lower energy and the green dot the synchronous particle. The red arrow shows the trend of a particle with a higher energy and the blue arrow the trend of a particle with a lower energy.

of light ( $\eta < 0$ ), they cannot run faster, but rather obtain more mass and are pushed to a dispersive orbit, resulting a late arrival at the rf cavity [? ].

A bunch of particles consists of particles with slightly different momentum as the synchronous particle, which are called “asynchronous particles”. When  $\eta > 0$ , the longitudinal focusing of particles is explained in Fig. 2.1.

## 2.1. Bunch and Bucket

---

The synchronous particle is indicated by the green spot in Fig. 2.1. It will gain the energy of  $qV_0 \sin \phi_s$  per passage through a rf cavity, where  $q$  is the charge of a particle. When  $\eta > 0$ , a particle with a smaller energy (blue spot) than the synchronous particle will run slower and have a longer revolution period, arriving the same rf cavity later and seeing a higher accelerating voltage. This particle has a decreasing revolution period to the revolution period of the synchronous particle. During the decreasing process, the lack of energy is compensated step-by-step approaching to the energy of the synchronous particle. Oppositely for a particle with a higher energy. As it is faster than the synchronous particle and has a shorter revolution period, it will arrive at the rf cavity earlier, seeing a smaller accelerating voltage. This particle has an increasing revolution period to the revolution period of the synchronous particle. During the increasing process, the excess energy will be reduced step-by-step approaching to the synchronous particle. Asynchronous particles will oscillate longitudinally around the synchronous particle. This longitudinal motion is plotted in the longitudinal phase space plane, See Fig. 2.2.

All particles oscillate around the synchronous particle and stay together, forming a “bunch”. The “bunch gap” is the area without any particles. The area occupied by a bunch in the longitudinal phase space plane is called the “longitudinal emittance”. First of all, we consider the synchronous particle with the synchronous phase 0. In this scenario, particles with a small energy deviation follow an elliptical path inside the bunch. For a given rf system with a specific rf voltage and harmonic number, there exists a maximum energy deviation. For particles with energy deviations larger than the maximum energy deviation, they cannot be trapped around the synchronous particle. The trajectory of a particle with the maximum energy deviation in longitudinal phase space plane defines a region with a specific size and form. This region is called the “rf bucket” or “stationary rf bucket”, see Fig. 2.3. The maximum momentum deviation of the rf bucket is called the “bucket height”. These buckets will exist as soon as the rf voltage is switched on and the number of circulating buckets is determined by the harmonic number and the bucket area and height are proportional to the square root of the rf voltage [? ]. The order of buckets to be filled is called the “bucket pattern”.

So far we give the definition of the bucket, when the synchronous particle sees no accelerating rf voltage. When the synchronous particle is accelerated, seeing the synchronous phase  $\phi_s$  per passage through an rf cavity, it will gain the energy of  $qV_0 \sin \phi_s$ . Particles oscillate around the synchronous particle at  $\phi_s$  with an elliptical orbit. The particle at  $\pi - \phi_s$  traces a closed fish-shaped orbit, which defines a “running rf bucket”, see Fig. 2.4. Particles at bigger phase than  $\pi - \phi_s$  cannot be captured by the bucket.

The “bucket size” is defined as the area of the longitudinal phase space plane enclosed by the bucket [? ]. For a same rf voltage, the bucket size of a running bucket is always smaller than that of a stationary bucket. The ratio of the bucket size of a running bucket to that of a stationary bucket is called the “bucket area factor”,  $\alpha_b$ . The bucket area factor can be calculated by [? ].

$$\alpha_b(\phi_s) \approx \frac{1 - \sin \phi_s}{1 + \sin \phi_s} \quad (2.12)$$

The oscillation of asynchronous particles is called the “synchrotron motion”. The

## 2.1. Bunch and Bucket

---

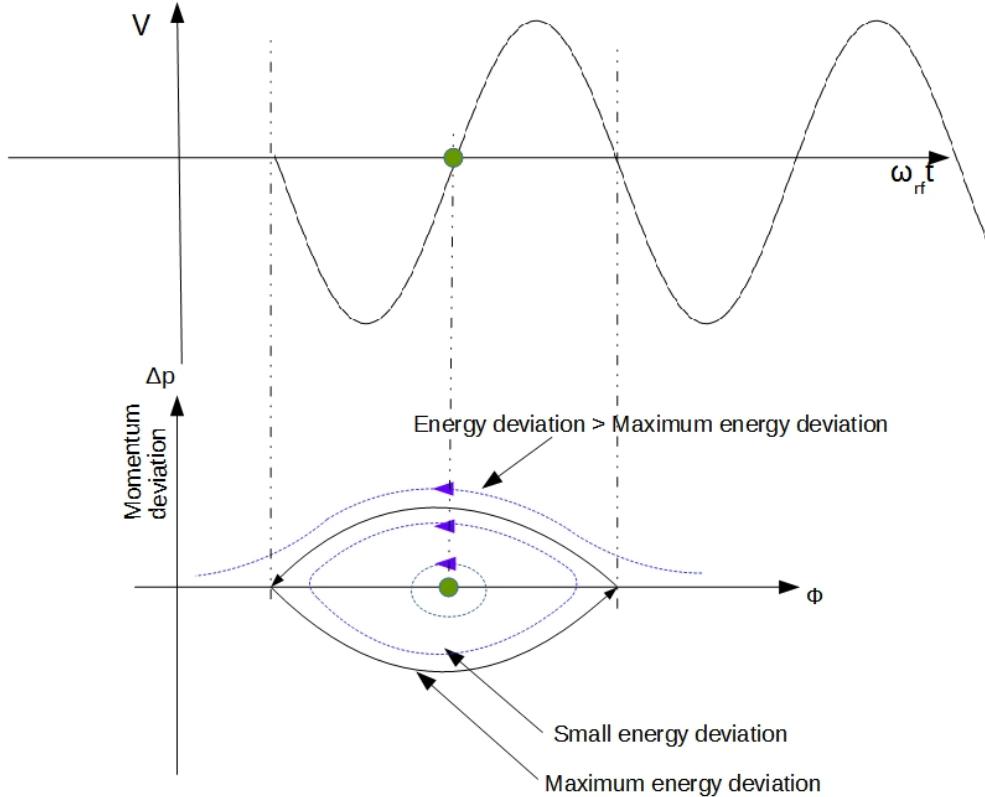


Figure 2.3: A stationary rf bucket.

The green dot represents the synchronous particle (top), the blue path orbits of asynchronous particles and the black path the boundary of a stationary rf bucket (bottom).

angular synchrotron frequency <sup>2</sup>  $\omega_s$  is [? ]

$$\omega_s = 2\pi f_{rev} \sqrt{\frac{hqV_0|\eta \cos \phi_s|}{2\pi\beta^2 E_0}} \quad (2.13)$$

Bunches are always captured in buckets. A synchrotron can have same amount of bunches as buckets. It is also possible for a synchrotron to have less amount of bunches than buckets, e.g. only a part of buckets are filled by bunches. A train of bunches circulating along a synchrotron to be transferred to buckets is defined as a “batch”.

The energy of a beam is related to the ‘magnetic rigidity’, which is defined as the following:

$$B\rho = \frac{p}{q} \quad (2.14)$$

where  $B$  is magnetic field, and  $\rho$  is the bending radius of a particle immersed in a magnetic field  $B$ . The ratio of  $p$  to  $q$  describes the “stiffness” of a beam, it can be considered as a measure of how much angular deflection results when a particle travels through a given magnetic field [? ]. The relation between the voltage of a rf cavity and the beam acceleration rate is

$$V_0 \sin \phi_s = 2\pi R\rho \dot{B} \quad (2.15)$$

---

<sup>2</sup>For the small-amplitude synchrotron motion.

## 2.1. Bunch and Bucket

---

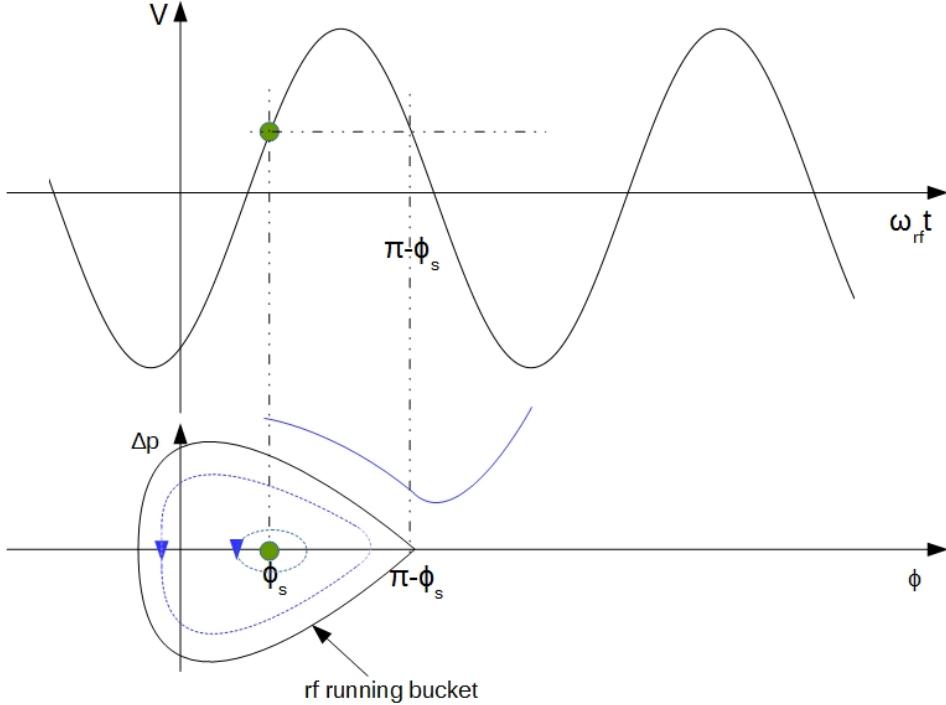


Figure 2.4: A running rf bucket.

The green dot represents the synchronous particle (top), the blue path orbits of asynchronous particles and the black path the boundary of a running rf bucket (bottom).

Bunches must be injected exactly in the center of buckets for the preservation of the longitudinal emittance, which requires the energy and phase matching between bunches and buckets. Besides, the shape of bunches to be transferred must match the shape of buckets to be injected in the longitudinal phase space plane. If the source and target synchrotrons have same cavity rf frequency, buckets of the source synchrotron must have same size and height as that of the target synchrotron. The voltage mismatch between bunches and buckets will cause an emittance blow-up. Fig. 2.5 illustrates a bunch-to-bucket injection with an energy, a phase or a voltage error.

The bunch coordinates in the longitudinal phase space plane of the source synchrotron, just before transfer, must be accurately controlled, according to the bucket to be filled [? ]. The bunch is transferred from the source to the target synchrotron with the same energy. So the beam has the same momentum for both synchrotrons. According to eq. 2.14, the magnetic rigidity of two ring accelerators must be same.

$$(B\rho)^{src} = \frac{p}{q} = (B\rho)^{trg} \quad (2.16)$$

Where the superscript of the symbol denotes the synchrotron, *src* represents the source synchrotron and *trg* the target synchrotron.

Before the B2B transfer, the revolution frequency of two ring accelerators must meet the following relation based on eq. 2.3.

$$C^{src} f_{rev}^{src} = \beta c = C^{trg} f_{rev}^{trg} \quad (2.17)$$

## 2.2. Phase Difference

---

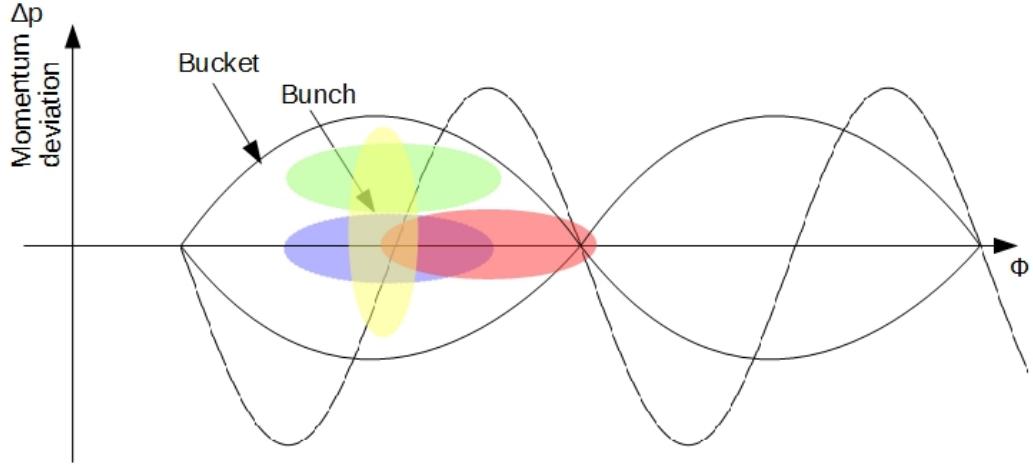


Figure 2.5: The bunch-to-bucket injection with a phase, energy or voltage error.

The blue area represents an injection without any error, the red area an injection with a phase error, the green an injection with a energy error and the yellow an injection with a voltage error (e.g. the rf voltage in the target Synchrotron is too high).

where  $C^X$  represents the circumference of a specific synchrotron. A group of new symbols are necessary to be defined. The revolution frequency and cavity rf frequency are denoted by  $f_{rev}^X$  and  $f_{rf}^X$ , the cavity harmonic number by  $h_{rf}^X$ , the harmonic number of the revolution frequency by  $h_{rev}^X$ , which is defined as the first harmonic, namely  $h_{rev}^X = 1$ . The superscript  $X$  can be either *src* or *trg* denoting the source or target synchrotron.

Due to the relation between the revolution frequency and cavity rf frequency, eq. 2.2, the ratio between cavity rf frequencies of the two rf systems is

$$\frac{f_{rf}^{src}}{f_{rf}^{trg}} = \frac{h^{src}}{h^{trg}} \cdot \frac{f_{rev}^{src}}{f_{rev}^{trg}} = \frac{h^{src}}{h^{trg}} \cdot \frac{C^{trg}}{C^{src}} \quad (2.18)$$

The energy and voltage match will be done by machine physicists, which are out of the scope of this dissertation. The dissertation concentrates on the phase matching.

## 2.2 Phase Difference

The rf voltage of the two rf systems are  $u_1(t)$  and  $u_2(t)$ .

$$u_1(t) = V_1 \sin(2\pi f_1 t + \phi_1) \quad (2.19)$$

$$u_2(t) = V_2 \sin(2\pi f_2 t + \phi_2) \quad (2.20)$$

where  $V_1$  and  $V_2$  are the amplitude,  $\phi_1$  and  $\phi_2$  the initial phases and  $f_1$  and  $f_2$  are the frequencies respectively.

The phase difference between  $u_1$  and  $u_2$  is

$$\Delta\phi = [2\pi(f_1 - f_2)t + \phi_1 - \phi_2] \mod 2\pi \quad (2.21)$$

The phase difference  $\Delta\phi$  is constant when two frequencies are the same ( $f_1 = f_2$ ). In order to change the phase difference for the phase matching between two rf

## 2.2. Phase Difference

---

voltages, the phase of either (or both) rf-system can be shifted backward or forward by means of the rf frequency modulation. The frequency of one (or both) rf voltages is modulated away from the nominal value for a specified period of time and then modulated back. This is the so-called phase shift. Eq. 2.22 gives the relation between the required phase shift  $\Delta\phi$  and the frequency modulation.

$$\Delta\phi = 2\pi \int_{t_0}^{t_0+T} \Delta f_{rf}(t) dt \quad (2.22)$$

The phase shift process starts at  $t_0$ . The obtainable phase shift is determined by the frequency offset  $\Delta f_{rf}$  and the duration of the frequency modulation  $T$ .

When two frequencies are slightly different, the phase difference  $\Delta\phi$  is a periodic function whose rate is the difference between two frequencies. This is the so-called frequency beating. The periodically variable rate is called the “beating frequency”,  $\Delta f = |f_1 - f_2|$ . The beating period is defined as a period of time for the periodical variation, namely  $1/\Delta f$ . Within one beating period, there exists a time point, which corresponds to a correct phase difference between the two rf systems, namely the phase alignment.

The phase alignment is realized based on two identical or two slightly different frequencies. These two frequencies are called “synchronization frequencies”, denoted as  $f_{syn}^X$ . Some FAIR use cases assume identical cavity rf frequencies or slightly different cavity rf frequencies. Therefore two cavity rf frequencies are chosen as the synchronization frequencies. There are quite some many FAIR use cases with big different cavity rf frequencies as well. In this scenario, two synchronization frequencies are an integer multiple of the same or slightly different derived rf frequencies, which are the fraction of the revolution frequencies. e.g. the fraction of the revolution frequency is  $f_{rev}^X/m$  and the synchronization frequency is  $Y \cdot f_{rev}^X/m$ , both  $m$  and  $Y$  are positive integers. The fraction of the revolution frequency and the integer multiple are determined by the circumference ratio and the harmonic number of two synchrotron. Because of the technical requirement (see Chap. 4), the synchronization frequencies cannot be higher than cavity rf frequencies, namely  $Y/m \leq h_{rf}^X$ . Besides, either  $m/Y$  or  $Y/m$  must be an integer for FAIR use cases, namely the revolution frequency is an integer multiple of the synchronization frequency or the synchronization frequency is an integer multiple of the revolution frequency, so the occurrence of positive zero-crossings of the synchronization frequencies and the positive zero-crossing of the revolution frequencies at the same time always indicates a specified bunch and bucket.

The calculation of the synchronization frequencies are explained for the different scenarios of the circumference ratio between two ring accelerators. For simplicity’s sake, the following analysis is from the perspective of the large and small synchrotrons instead of the source and target synchrotrons. The superscript  $X$  of  $C^X$ ,  $f_{rev}^X$ ,  $f_{rf}^X$  and  $h_{rf}^X$  will be either  $l$  or  $s$  denoting the large or small synchrotron.  $\Delta f$  represents the beating frequency,  $\kappa$ ,  $m$ ,  $n$  and  $Y$  are used to represent positive integers and  $\lambda$  a decimal number. The following analysis is based on the energy match between two ring accelerators.

## 2.2. Phase Difference

---

### 2.2.1 Circumference Ratio is an Integral

If the ratio of the circumference of the injection/extraction orbit of the large synchrotron to that of the small synchrotron is an integer, we have the following relation.

$$\frac{C^l}{C^s} = \kappa \quad (2.23)$$

From the circumference ratio, the revolution frequency ratio of two ring accelerators can be calculated.

$$\frac{f_{rev}^l}{f_{rev}^s} = \frac{1}{\kappa} \quad (2.24)$$

Based on eq. 2.24 and the harmonic number, the cavity rf frequency  $f_{rf}^X$  is calculated by eq. 2.25 and eq. 2.26

$$f_{rf}^s = h_{rf}^s \cdot f_{rev}^s = h_{rf}^s \cdot \kappa \cdot f_{rev}^l \quad (2.25)$$

$$f_{rf}^l = h_{rf}^l \cdot f_{rev}^l \quad (2.26)$$

Dividing eq. 2.26 by eq. 2.25, we get

$$\frac{f_{rf}^l}{f_{rf}^s} = \frac{h_{rf}^l}{h_{rf}^s \cdot \kappa} \quad (2.27)$$

In this scenario, the obvious choice of two same synchronization frequencies are  $f_{rf}^l/h_{rf}^l$  and  $f_{rf}^s/(h_{rf}^s \kappa)$ . The synchronization frequencies must be less than or equal to the cavity rf frequencies, otherwise they can not indicate the actual location of bunches and buckets. Generally, the rf frequency of  $h=1$  is used as the revolution frequency and the phase/frequency modification is done for the revolution frequency due to the technical requirement, so the integer multiple of the revolution frequency is a preferable choice for the synchronization frequency. Hence, the best choice of two synchronization frequencies are

$$f_{syn}^l = \frac{f_{rf}^l}{h_{rf}^l/Y} = Y f_{rev}^l = h_{syn}^l f_{rev}^l \quad (2.28)$$

$$f_{syn}^s = \frac{f_{rf}^s}{h_{rf}^s \kappa / Y} = \frac{Y}{\kappa} f_{rev}^s = h_{syn}^s f_{rev}^s \quad (2.29)$$

where  $Y$  is defined as the Greatest Common Divisor (GCD) of  $h_{rf}^l$  and  $h_{rf}^s \cdot \kappa$  and  $h_{syn}^X$  the harmonic number of the synchronization frequency.

In eq. 2.21, the phase difference between  $f_1$  and  $f_2$  equals to  $\phi_1 - \phi_2$  when  $f_1 = f_2$ . The value of the initial phase is related to the choice of the rf frequency. e.g. when the phase of rf frequency  $f_1$  is  $\phi_1$ , the phase of the rf frequency  $Nf_1$  is  $(N\phi_1 \bmod 2\pi)$ . Hence, the phase difference must be defined with regard to the dedicated rf frequencies. The phase difference between two synchronization frequencies  $f_{syn}^l$  and  $f_{syn}^s$  is denoted as  $\Delta\phi_{syn}$ .  $\phi_0^X$  denotes the initial phase of the synchronization frequency. The phase difference  $\Delta\phi_{syn}$  calculated as

$$\Delta\phi_{syn} = (\phi_{syn}^l - \phi_{syn}^s) \bmod 2\pi \quad (2.30)$$

The cavity rf frequency of a synchrotron is  $h_{rf}^X/h_{syn}^X$  times as large as its synchronization frequency, so the phase difference between the cavity rf frequencies  $\Delta\phi_{rf}$

## 2.2. Phase Difference

---

is also  $h_{rf}^X/h_{syn}^X$  times as large as the phase difference between two synchronization frequencies  $\Delta\phi_{syn}$ .  $\Delta\phi_{rf}$  is the bunch-to-bucket injection center mismatch, so  $\Delta\phi_{rf}$  is always with regard to the target synchrotron, namely  $X = \text{trg}$ .

$$\Delta\phi_{rf} = \frac{h_{rf}^{\text{trg}}}{h_{syn}^{\text{trg}}} \Delta\phi_{syn} \mod 2\pi \quad (2.31)$$

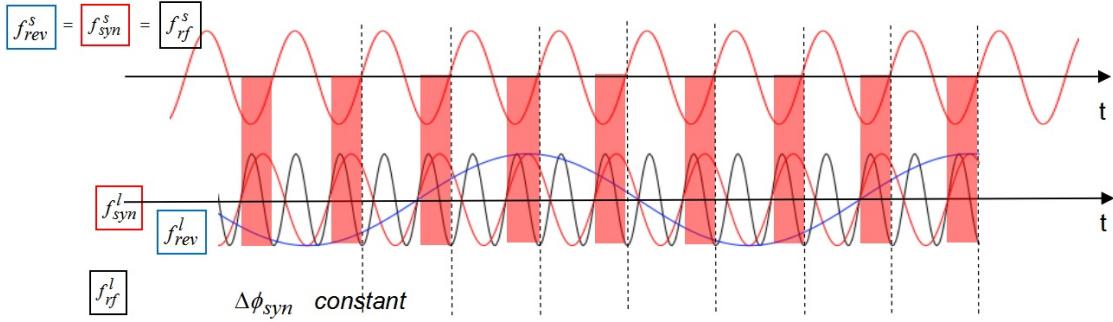


Figure 2.6: The constant phase difference between two synchronization frequencies  $f_{syn}^l$  and  $f_{syn}^s$  when  $\kappa = 5$ ,  $h_{rf}^s = 1$  and  $h_{rf}^l = 10$ .

*Red planes represent the constant phase difference between two synchronization frequencies. The red sinusoidal waves in Fig. 2.6 are the individual synchronization frequencies. Black sinusoidal waves represent the individual cavity rf frequencies and the blue sinusoidal wave the revolution frequency. The red sinusoidal wave at the top time axis represents the synchronization frequency, the cavity rf frequency and the revolution frequency.*

Fig. 2.6 illustrates two synchronization frequencies  $f_{syn}^l$  and  $f_{syn}^s$ , when  $\kappa = 5$ ,  $h_{rf}^s = 1$  and  $h_{rf}^l = 10$ . The GCD of  $h_{rf}^l$  and  $h_{rf}^s \cdot \kappa$  is 5, namely  $Y = 5$ ,  $f_{rf}^l/f_{rf}^s = 2$ ,  $f_{syn}^l = f_{rf}^l/2 = 5f_{rev}^l$ ,  $f_{syn}^s = f_{rf}^s/1 = f_{rev}^s$  and  $\Delta\phi_{rf} = 2\Delta\phi_{syn}$ . The parameters are from the FAIR use case of the  $H^+$  B2B transfer from the SIS18 to the SIS100, which will be explained in Sec. 6.1.2.

### 2.2.2 Circumference Ratio is close to an Integer

If the ratio of the circumference of the injection/extraction orbit of the large synchrotron to that of the small synchrotron is a decimal number close to an integer. Eq. 2.23 changes to

$$\frac{C^l}{C^s} = \kappa + \lambda \quad (2.32)$$

where  $\kappa$  is the integer part and  $\lambda$  is the decimal part of the decimal number and the absolute value of  $\lambda$  is smaller than 0.005 for FAIR use cases. The bound of  $\lambda$  is shown in Chap. 6. From the circumference ratio, the revolution frequency ratio of two ring accelerators can be calculated.

$$\frac{f_{rev}^l}{f_{rev}^s} = \frac{1}{\kappa + \lambda} \quad (2.33)$$

Based on eq. 2.33 and harmonic number, the  $f_{rf}^X$  are calculated by eq. 2.34 and eq. 2.35

$$f_{rf}^s = h_{rf}^s \cdot f_{rev}^s = h_{rf}^s \cdot (\kappa + \lambda) \cdot f_{rev}^s \quad (2.34)$$

## 2.2. Phase Difference

---

$$f_{rf}^l = h_{rf}^l \cdot f_{rev}^l \quad (2.35)$$

We get the relation between  $f_{rf}^s$  and  $f_{rf}^l$  by dividing eq. 2.35 by eq. 2.34.

$$\frac{f_{rf}^l}{f_{rf}^s} = \frac{h_{rf}^l}{h_{rf}^s \cdot (\kappa + \lambda)} = \frac{h_{rf}^l}{h_{rf}^s \cdot \kappa + h_{rf}^s \cdot \lambda} \quad (2.36)$$

In eq. 2.36,  $h_{rf}^s \lambda$  is much smaller than  $h_{rf}^s \kappa$ , therefore  $h_{rf}^s \lambda$  can be neglected for the calculation of the synchronization frequencies. Apart from the similar reasons mentioned in the scenario of the integral circumference ratio in Sec. 2.2.1, the synchronization frequencies with the integer multiple of  $f_{rf}^l/h_{rf}^l$  and  $f_{rf}^s/(h_{rf}^s \kappa)$  achieve a more precise phase difference. Two best slightly different synchronization frequencies are

$$f_{syn}^l = \frac{f_{rf}^l}{h_{rf}^l/Y} = Y f_{rev}^l = h_{syn}^l f_{rev}^l \quad (2.37)$$

$$f_{syn}^s = \frac{f_{rf}^s}{h_{rf}^s \kappa / Y} = \frac{Y}{\kappa} f_{rev}^s = h_{syn}^s f_{rev}^s \quad (2.38)$$

$Y$  is the GCD of  $h_{rf}^l$  and  $h_{rf}^s \cdot \kappa$ . Substituting two synchronization frequencies into eq. 2.21, we get the periodically variable phase difference between two synchronization frequencies  $\Delta\phi_{syn}$ .

$$\Delta\phi_{syn}(t) = [2\pi(f_{syn}^l - f_{syn}^s)t + \phi_{syn}^l - \phi_{syn}^s] \mod 2\pi \quad (2.39)$$

Substituting  $f_{rf}^l$  in eq. 2.36 into eq. 2.39, we get

$$\Delta\phi_{syn}(t) = [2\pi Y \frac{-\lambda f_{rf}^s}{(\kappa + \lambda) h_{rf}^s \kappa} t + \phi_{syn}^l - \phi_{syn}^s] \mod 2\pi \quad (2.40)$$

Eq. 2.40 shows that the phase difference is a periodic function. The beating frequency between two synchronization frequency is  $\Delta f = |f_{syn}^l - f_{syn}^s|$ . The beating frequency must not be too large in order to guarantee the precision, but also not too small to satisfy the time constraint for the phase matching. The phase difference between two cavity rf frequencies is

$$\Delta\phi_{rf} = \left( \frac{h_{rf}^{trg}}{h_{syn}^{trg}} \Delta\phi_{syn} \right) \mod 2\pi \quad (2.41)$$

Fig. 2.7 shows the periodically variable phase difference between two slightly different synchronization frequencies  $f_{syn}^l$  and  $f_{syn}^s$  when  $\kappa = 2$ ,  $\lambda = -0.003$ ,  $h_{rf}^s = 2$  and  $h_{rf}^l = 4$ . The GCD of  $h_{rf}^l$  and  $h_{rf}^s \cdot \kappa$  is 4, namely  $Y = 4$ . Hence, according to eq. 2.37 and eq. 2.38, two synchronization frequencies are  $f_{syn}^l = f_{rf}^l = 4f_{rev}^l$ ,  $f_{syn}^s = f_{rf}^s = 2f_{rev}^s$  and  $\Delta\phi_{rf} = \Delta\phi_{syn}$ . The parameters are from the FAIR use case of the h=4 B2B transfer from the SIS18 to the ESR, which will be explained in Sec. 6.2.1.

### 2.2.3 Circumference Ratio is far away from an Integer

When the circumference ratio of the large synchrotron to that of the small synchrotron is far away from an integer, the circumference ratio is a decimal number

## 2.2. Phase Difference

---

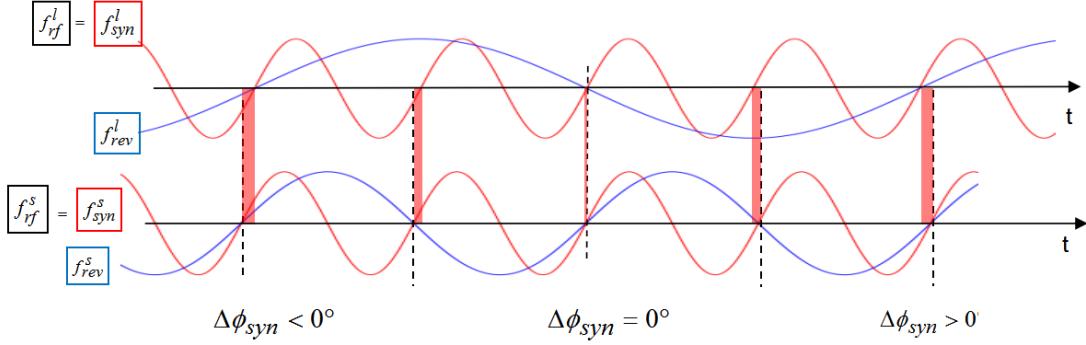


Figure 2.7: The periodically variable phase difference between two slightly different synchronization frequencies  $f_{syn}^l$  and  $f_{syn}^s$  when  $\kappa = 2$ ,  $\lambda = -0.003$ ,  $h_{rf}^s = 2$  and  $h_{rf}^l = 4$ .

*Red planes represent the periodical variable phase difference and red sinusoidal waves the synchronization frequencies and cavity rf frequencies and blue sinusoidal waves the revolution frequencies.*

and eq. 2.23 can be expressed as a rational number plus a small remainder of the decimal number.

$$\frac{C^l}{C^s} = \frac{m}{n} + \lambda \quad (2.42)$$

where  $m/n$  represents a quotient of two integers,  $m$  is a numerator and  $n$  is a non-zero denominator.  $\lambda$  represents the remainder of the decimal part and the absolute value of  $\lambda$  is smaller than 0.05 for FAIR use cases.

Substituting  $\kappa$  by  $m/n$  into eq. 2.36, we get the relation between  $f_{rf}^s$  and  $f_{rf}^l$ .

$$\frac{f_{rf}^l}{f_{rf}^s} = \frac{h_{rf}^l \cdot n}{h_{rf}^s \cdot m + h_{rf}^s \cdot \lambda \cdot n} \quad (2.43)$$

In eq. 2.43,  $h_{rf}^s \lambda n$  is much smaller than  $h_{rf}^s m$ . Similarly as the scenario of the close to an integral circumference ratio in Sec. 2.2.2, two slightly different synchronization frequencies are

$$f_{syn}^l = \frac{f_{rf}^l}{h_{rf}^l n / Y} = \frac{Y}{n} f_{rev}^l = h_{syn}^l f_{rev}^l \quad (2.44)$$

$$f_{syn}^s = \frac{f_{rf}^s}{h_{rf}^s m / Y} = \frac{Y}{m} f_{rev}^s = h_{syn}^s f_{rev}^s \quad (2.45)$$

$Y$  is the GCD of  $h_{rf}^l n$  and  $h_{rf}^s m$ . Substituting two synchronization frequencies into eq. 2.21, we get the periodical phase difference  $\Delta\phi_{syn}$ .

$$\Delta\phi_{syn}(t) = [2\pi(f_{syn}^l - f_{syn}^s)t + \phi_{syn}^l - \phi_{syn}^s] \mod 2\pi \quad (2.46)$$

Substituting  $f_{rf}^l$  in eq. 2.43 into eq. 2.46, we get

$$\Delta\phi_{syn}(t) = [2\pi Y \frac{-\lambda f_{rf}^s}{(m/n + \lambda) h_{rf}^s m} t + \phi_{syn}^l - \phi_{syn}^s] \mod 2\pi \quad (2.47)$$

### 2.3. Phase Match of two Rf Systems

---

Eq. 2.47 shows that the phase difference is a periodic function. The beating frequency is  $\Delta f = |f_{syn}^l - f_{syn}^s|$ . It is possible to have various combination of  $m/n$  and  $\lambda$ .  $\lambda$  determines the beating frequency. The smaller, the more precise the phase matching between two synchronization frequencies.  $Y/n$  and  $Y/m$  determines two synchronization frequencies. For FAIR use cases,  $n/Y$  and  $m/Y$  are always integer. So the synchronization frequencies are the fraction of the revolution frequencies ( $h=1$ ), which is called the “subharmonic”. Hence, we have to find a proper combination of  $m/n$  and  $\lambda$ . The phase difference between two cavity rf frequencies is

$$\Delta\phi_{rf} = \left( \frac{h_{rf}^{trg}}{h_{syn}^{trg}} \Delta\phi_{syn} \right) \bmod 2\pi \quad (2.48)$$

Fig. 2.8 shows the periodically variable phase difference between two slightly different synchronization frequencies  $f_{syn}^l$  and  $f_{syn}^s$  when  $m = 26$ ,  $n = 10$ ,  $\lambda = -0.003$ ,  $h_{rf}^s = 1$  and  $h_{rf}^l = 1$ .  $f_{rf}^l/f_{rf}^s = 1 \cdot 10/(1 \cdot 26 - 1 \cdot 10 \cdot 0.003)$ . The GCD of  $h_{rf}^l n = 1 \cdot 10$  and  $h_{rf}^s m = 1 \cdot 26$  is 2, namely  $Y = 2$ . Hence, according to eq. 2.44 and eq. 2.45, two synchronization frequencies are  $f_{syn}^l = f_{rf}^l/5 = f_{rev}/5$ ,  $f_{syn}^s = f_{rf}^s/13 = f_{rev}/13$  and  $\Delta\phi_{rf} = 5\Delta\phi_{syn}$ . The parameters are from the FAIR use case of the B2B transfer from the CR to the HESR, which will be explained in Sec. 6.3.3.

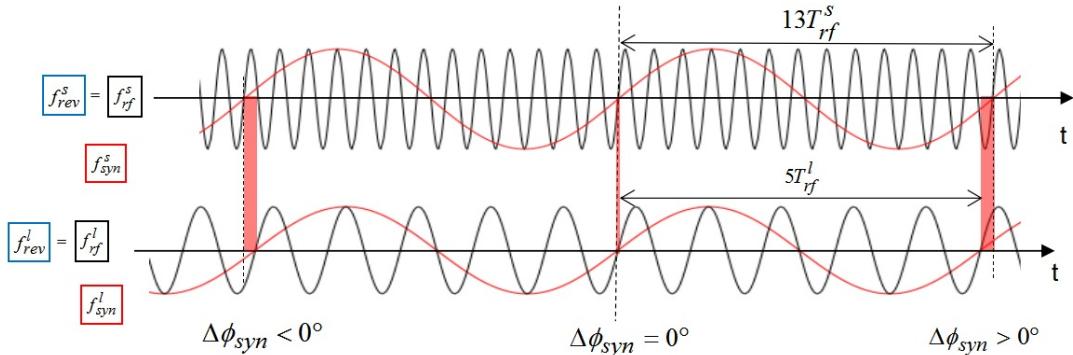


Figure 2.8: The periodically variable phase difference between two synchronization frequencies  $f_{syn}^l$  and  $f_{syn}^s$  when  $m = 26$ ,  $n = 10$ ,  $\lambda = -0.003$ ,  $h_{rf}^s = 1$  and  $h_{rf}^l = 1$ .

*Red planes represent the periodical variable phase difference and red sinusoidal waves the synchronization frequencies. Black sinusoidal waves represent the cavity rf frequencies and the revolution frequencies.*

## 2.3 Phase Match of two Rf Systems

For the different scenarios mentioned in Sec. 2.2, two methods are available for the phase alignment of the two rf systems, the phase shift and the frequency beating methods. Both methods provide a time frame for the B2B transfer, within which bunches are transferred into buckets with the bunch-to-bucket injection center mismatch smaller than a given upper bound. This time frame is called the “synchronization window”. Both methods are based on the prerequisite that the phase difference between the two rf systems is predictable, so the LLRF feedback

## 2.3. Phase Match of two Rf Systems

---

loops used for phase corrections must be switched off before the B2B transfer starts. e.g. beam phase feedback loop [? ] and bunch-by-bunch longitudinal rf feedback loop [? ].

### 2.3.1 Phase Shift Method

In order to change the constant phase difference between two synchronization frequencies, the phase of either (or both) rf system can be shifted backward or forward by means of the rf frequency modulation. The frequency of one (or both) rf system is modulated away from the nominal value for a specified period of time and then modulated back.

The phase shift process must be performed slowly enough for the preservation of the longitudinal emittance. After the phase shift, bunches of the source synchrotron are phase aligned with buckets of the target synchrotron. Theoretically the synchronization window is infinitely long. In fact, the beam feedback loops on the rf system are switched off before the B2B starts, so the beam is maybe only stable for a short period of time only, e.g. 10 ms. Hence, bunches must be transferred as soon as possible, introducing a synchronization window with a limited length.

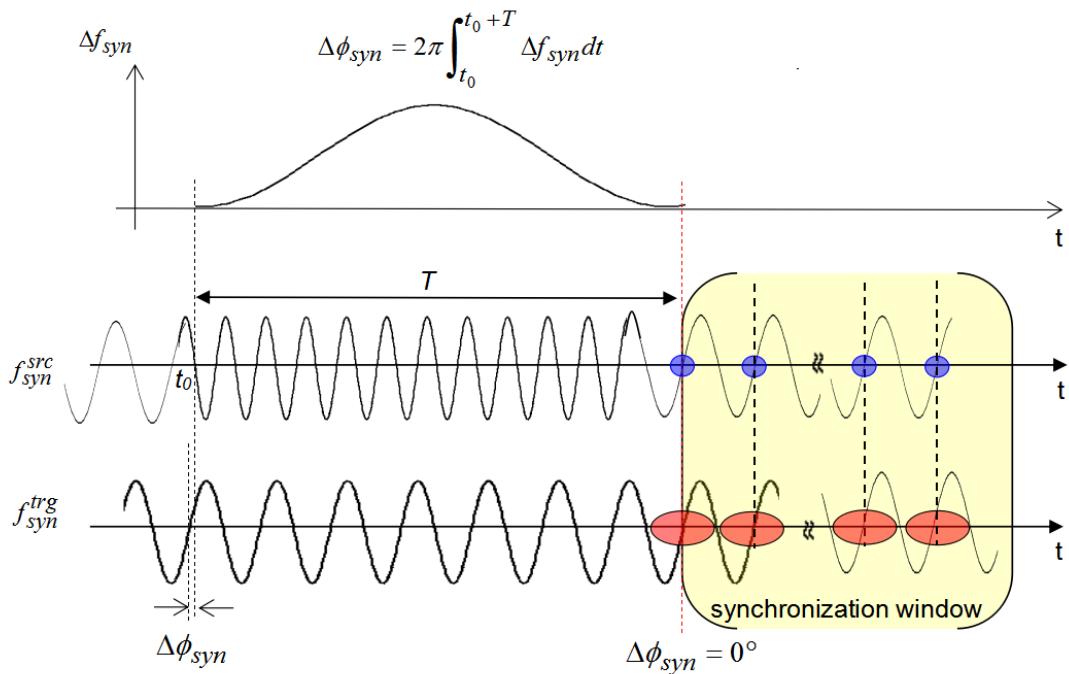


Figure 2.9: An example for the phase shift method with a sinusoidal rf frequency modulation.

*Blue dots represent bunches of the source synchrotron and red dots buckets of the target synchrotron.*

Fig. 2.9 illustrates an example for the phase shift method with a sinusoidal rf frequency modulation. The  $f_{syn}^l$  and  $f_{syn}^s$  are the synchronization frequencies respectively from the large and small synchrotrons. The time-of-flight between bunches and buckets is compensated here. The phase shift is done for the small synchrotron in this example. The red dashed line shows the end of the phase shift process

### 2.3. Phase Match of two Rf Systems

---

$(\Delta\phi_{syn} = 0^\circ)$  and the beginning of the synchronization window, drawn in yellow. After the phase shift, bunches match with buckets. A sinusoidal frequency modulation  $\Delta f_{syn}$  with a fixed duration time  $T$  is used for the rf frequency modulation on  $f_{syn}^s$ .

$$\Delta f_{syn}(t) = A[1 - \cos \frac{2\pi}{T}(t - t_0)] \quad (2.49)$$

where  $A$  is the amplitude of the sinusoidal wave. Based on eq. 2.22, the area of the sinusoidal wave equals to  $\Delta\phi_{syn}/2\pi$ . We can calculate the amplitude  $A$

$$A = \frac{\Delta\phi_{syn}}{2\pi} \cdot \frac{1}{T} \quad (2.50)$$

When the rf frequency modulation on the synchronization frequency  $f_{syn}^X$  is  $\Delta f_{syn}$ , the rf frequency modulation on the cavity rf frequency  $\Delta f_{rf}$  and the phase shift for the cavity rf frequency  $\Delta\phi_{rf}$  are

$$\Delta f_{rf} = \frac{h_{rf}^X}{h_{syn}^X} \Delta f_{syn} \quad (2.51)$$

$$\Delta\phi_{rf} = (\frac{h_{rf}^{trg}}{h_{syn}^{trg}} \Delta\phi_{syn}) \mod 2\pi \quad (2.52)$$

A particular case of the B2B synchronization occurs, when the target synchrotron is empty, i.e. it did not capture any bunches yet, the phase jump can be done for the target synchrotron.

Now we analyze the rf frequency modulation of the phase shift from the beam dynamics perspective.

- Momentum shift and average radial excursion

A rf frequency modulation introduces a momentum shift.

$$\frac{\Delta p}{p} = \frac{1}{\frac{1}{\gamma^2} - \alpha_p} \cdot \frac{\Delta f_{rf}}{f_{rf}} \quad (2.53)$$

Substituting  $\Delta R/R$  in eq. 2.9 into eq. 2.53, we get the radial excursion due to the rf frequency modulation.

$$\frac{\Delta R}{R} = \frac{1}{\frac{1}{\alpha_p \gamma^2} - 1} \cdot \frac{\Delta f_{rf}}{f_{rf}} \quad (2.54)$$

The rf frequency modulation causes a radial excursion. The maximum allowed radial excursion is a design parameter, which is given for a synchrotron lattice. Thus, a maximum frequency offset for the rf frequency modulation also exists.

- Shift of the synchronous phase

The rf frequency modulation is accompanied with a beam acceleration or deceleration, so the synchronous phase deviates from 0. Based on eq. 2.14, we can get the first derivative of the magnetic rigidity

$$\dot{B}\rho = \frac{1}{q} \frac{d\Delta p}{dt} = \frac{B\rho}{p} \frac{d\Delta p}{dt} \quad (2.55)$$

## 2.3. Phase Match of two Rf Systems

---

Substituting  $\dot{B}\rho$  in eq. 2.55 into eq. 2.15, we get the relation between the change in the synchronous phase and the momentum shift rate based on the prerequisite that  $\Delta R/R$  and  $\phi_s$  is very small. Because the synchronous phase before the phase shift is  $0^\circ$ , the synchronous phase change equals to the synchronous phase  $\phi_s$ . The maximum radial excursion of FAIR synchrotrons  $\Delta R/R$  is on the order of  $10^{-4}$  and the synchronous phase is less than  $10^\circ$ .

$$V_0 \sin \phi_s \approx V_0 \phi_s = \frac{2\pi R B \rho}{p} \frac{d\Delta p}{dt} \quad (2.56)$$

It is clear from eq. 2.56 that when the rf frequency is modulated,  $\phi_s$  is only determined by  $\frac{d\Delta p}{dt}$ , since the change of other parameters are very small and negligible.  $\phi_s$  is proportional to the momentum shift rate  $\frac{d\Delta p}{dt}$ . In eq. 2.53,  $\gamma$  change very slowly as compared to  $\Delta p$  during the rf frequency modulation. So we can get the relation between  $\frac{d\Delta p}{dt}$  and the rf frequency modulation rate  $\frac{d\Delta f_{rf}}{dt}$  by the first derivative of eq. 2.53.

$$\frac{1}{p} \frac{d\Delta p}{dt} = \frac{1}{(1/\gamma^2 - \alpha_p) f_{rf}} \frac{d\Delta f_{rf}}{dt} \quad (2.57)$$

Substituting  $\frac{d\Delta p}{dt}$  in eq. 2.57 into eq. 2.56, we get the relation between the change in the synchronous phase  $\phi_s$  and the change rate of the rf frequency modulation.

$$V_0 \phi_s = \frac{2\pi R B \rho}{(1/\gamma^2 - \alpha_p) f_{rf}} \frac{d\Delta f_{rf}}{dt} \quad (2.58)$$

Hence, the synchronous phase change is proportional to  $\frac{d\Delta f_{rf}}{dt}$ .

- Bucket size

At the flattop, the bucket is a stationary bucket. During the frequency modulation process, the bucket becomes a running bucket with  $\phi_s \neq 0^\circ$ . When the synchronous phase is very small, we get the bucket area factor from eq. 2.12.

$$\alpha_b(\phi_s) \approx \frac{1 - \phi_s}{1 + \phi_s} \quad (2.59)$$

Substituting  $\phi_s$  in eq. 2.58 into eq. 2.59, we get

$$\alpha_b(\phi_s) \approx \frac{(1/\gamma^2 - \alpha_p) f_{rf} V_0 - 2\pi R B \rho \frac{d\Delta f_{rf}}{dt}}{(1/\gamma^2 - \alpha_p) f_{rf} V_0 + 2\pi R B \rho \frac{d\Delta f_{rf}}{dt}} \quad (2.60)$$

Buckets must be big enough to capture bunches. Eq. 2.60 shows that the bucket area factor is in inverse proportion to  $\frac{d\Delta f_{rf}}{dt}$ . Hence,  $\frac{d\Delta f_{rf}}{dt}$  must be small enough to guarantee the bucket size, namely the change of the rf frequency modulation must be slow enough.

- Adiabaticity

A process is called “adiabatic” when the rf frequency is changed slowly enough for the beam to follow. The condition that the rf frequency varies slowly can be expressed by

$$\varepsilon = \frac{1}{\omega_s^2} \left| \frac{d\omega_s}{dt} \right| \quad (2.61)$$

### 2.3. Phase Match of two Rf Systems

---

where  $\varepsilon$  is the adiabaticity parameter. For the angular synchrotron frequency, eq. 2.13, all of the other variables change very slowly compared with  $\phi_s$ . From eq. (2.61) and eq. (2.13), the adiabaticity can be written as follows [?]:

$$\varepsilon \approx \frac{1}{2\omega_s} |\dot{\phi}_s \phi_s| \quad (2.62)$$

Substituting  $\phi_s$  and  $\dot{\phi}_s$  in eq. 2.58 into eq. 2.62, we get

$$\varepsilon \approx \frac{1}{2\omega_s} \left[ \frac{2\pi RB\rho}{(1/\gamma^2 - \alpha_p)f_{rf}V_0} \right]^2 \left| \frac{d\Delta f_{rf}}{dt} \frac{d^2\Delta f_{rf}}{dt^2} \right| \quad (2.63)$$

where  $\omega_s$  is the angular synchrotron frequency with no frequency modulation. Form the adiabaticity eq. 2.63,  $\frac{d\Delta f_{rf}}{dt}$  and  $\frac{d^2\Delta f_{rf}}{dt^2}$  must exist and must be small enough to guarantee the adiabaticity. Namely,  $\frac{d\Delta f_{rf}}{dt}$  must be continuous and the change of  $\frac{d\Delta f_{rf}}{dt}$  must be slow enough.

- Tune shift

So far the rf frequency modulation is analyzed from the longitudinal beam dynamics perspective. Because of the momentum shift, the rf frequency modulation has an influence on the transverse beam dynamics as well. The beam particle's tune  $Q_{x/y}$  is defined as the frequency of the horizontal/vertical oscillations and chromaticity  $Q'_{x/y}$  is defined as their horizontal/vertical dependence on particle momentum [? ]. The momentum spread  $\Delta p/p \neq 0$  during the phase shift process causes horizontal/vertical tune shifts  $\Delta Q_{x/y}$  [? ].

$$\Delta Q_{x/y} = Q'_{x/y} \frac{\Delta p}{p} \quad (2.64)$$

The momentum shift of FAIR synchrotrons  $\Delta p/p$  is in the  $10^{-4}$  range and the chromaticity is on the order of 10. So the tune shift is relative small and has almost no influence on the transverse motion.

According to the beam dynamics analysis, there are several requirements for the rf frequency modulation:

- There exists a maximum rf frequency offset  $\Delta f_{rf\_max}$ .
- $\frac{d\Delta f_{rf}}{dt}$  must be continuous and small enough.
- $\frac{d^2\Delta f_{rf}}{dt^2}$  must be small enough.

Application of these criterion to FAIR use cases, please see Chap. 5.

#### 2.3.2 Frequency Beating Method

The frequency beating method uses two slightly different synchronization frequencies. When two synchronization frequencies are slightly different, two rf systems are beating automatically. When they are identical, either the rf system of the source or that of the target is detuned to achieve the beating. The frequency is detuned at constant energy by changing the frequency and magnetic field. This will be done by

### 2.3. Phase Match of two Rf Systems

---

operators and is out of the scope of this dissertation. The frequency detuning for the synchronization frequency is denoted as  $\Delta f_{syn}$  and that for the cavity rf frequency is denoted as  $\Delta f_{rf}$ ,  $\Delta f_{rf} = \frac{h_{rf}^X}{h_{syn}^X} \Delta f_{syn}$ . The synchronization window has a certain length, which is denoted as  $T_w$ . The synchronization window brings a symmetric time frame with respect to the time, when the phase difference between two synchronization frequencies is closest to the required phase difference, see yellow region in Fig. 2.10. The red dashed line shows the time of the closest to the required phase difference. The phase difference between two synchronization frequencies within the synchronization window is denoted as  $\sigma_{syn}$  and the bunch-to-bucket injection center mismatch within the synchronization window is denoted as  $\sigma_{rf}$ . There exists the following relation

$$\sigma_{rf} = \frac{h_{rf}^{trg}}{h_{syn}^{trg}} \sigma_{syn} \quad (2.65)$$

The bunch-to-bucket injection center mismatch is related to the length of the synchronization window, see eq. 2.66.

$$\sigma_{rf} = \pm \frac{1}{2} \cdot 2\pi |f_{syn}^{src} - f_{syn}^{trg}| \cdot T_w \cdot \frac{h_{rf}^{trg}}{h_{syn}^{trg}} \quad (2.66)$$

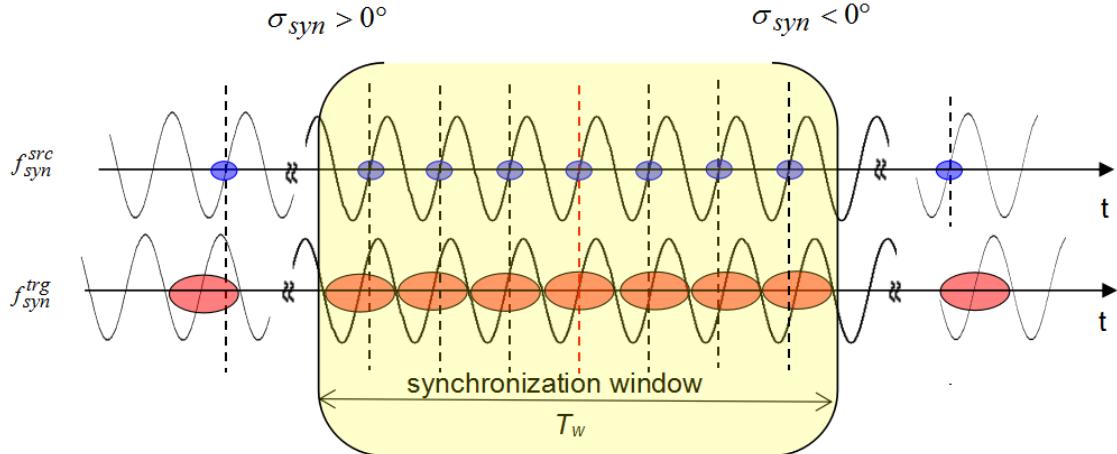


Figure 2.10: The illustration of the frequency beating method.

*Blue dots represent bunches of the source synchrotron and red dots buckets of the target synchrotron.*

In reality, all B2B transfer have a tolerable upper bound for the bunch-to-bucket center mismatch  $\sigma_{rf\_max}$  (e.g.  $\sigma_{rf\_max} = \pm 1^\circ$  for FAIR use cases). The upper bound brings a maximum synchronization window  $T_{w\_max}$ . The maximum synchronization window is

$$T_{w\_max} = \frac{2|\sigma_{rf\_max}| \cdot \frac{h_{rf}^{trg}}{h_{syn}^{trg}}}{2\pi} \cdot \frac{1}{|f_{syn}^{src} - f_{syn}^{trg}|} \quad (2.67)$$

The rf frequency is detuned at the end of the acceleration ramp. The rf frequency detuning is accompanied with the magnetic field and orbit change.

## 2.4. Synchronization of Extraction and Injection Kicker Magnets

---

- Radial excursion

Because the momentum should not be affected by the frequency detuning for the energy match, namely  $\Delta p=0$ , we can get the general relation between the radial excursion and the rf frequency change by substituting  $\Delta p=0$  into eq. 2.8.

$$\frac{\Delta R}{R} = -\frac{\Delta f_{rf}}{f_{rf}} \quad (2.68)$$

$\frac{\Delta R}{R}$  constrained by the synchrotron lattice is used to check the acceptance.

## 2.4 Synchronization of Extraction and Injection Kicker Magnets

The proper bunch-to-bucket transfer requires not only that two rf systems are synchronized with each other, but also that the extraction and injection kicker magnets are synchronized with beam.

A kicker magnet (or kicker) is a dipole magnet, which is used to rapidly switch particles between two paths. An injection kicker merges one beam into a circulating beam in a synchrotron and an extraction kicker diverts a circulating beam to leave a synchrotron. Generally, the extraction or injection kicker is consisted of a certain number of kicker magnets instead of a single one. The B2B transfer needs a fast beam extraction and injection, which extracts and injects beam in a single-turn. Hence, a pulsed kicker magnet must be used with rapid rise time and fall time and the variable pulse flat-top [? ]. Fig. 2.11 shows the schematic diagram of a kicker magnet. The energy storage module is charged with a high voltage power supply. It will be discharged via the transmission cable and the kicker magnet by using the pulse start switch. Before the increase of the magnetic field, there exist a preparation time for the kicker magnet. The magnet needs a certain period of time to increase from zero to a stable magnetic field, which is so-called a “kicker rise time” (short: rise time). The length of the “kicker flat-top” can be modified by switching on the stop switch in correlation with the pulse start switch. When the pulse stop switch is switched off, the magnet needs a certain period of time to reduce to zero magnetic field. This period is so-called a “kicker fall time” (short: fall time) [? ]. For the proper B2B transfer, the extraction and injection kickers must be synchronized with the synchrotron rf signal. The start switch must be switched on the preparation time earlier before the tail of the circulating bunch passes the kicker, so that the transition of the kicker (the rise-up of the magnetic field) will be carried out during bunch gaps. The pulse stop switch must be switched off in time so that the transition of the kicker (the fall-down of the magnetic field) will not affect the head of the next coming bunch in the synchrotron. The kicker control electronic produces the ignition signal to switch on/off two switches. Generally a preparation time of FAIR kickers is within the 5–10  $\mu s$  range. Compared with the FAIR rf frequency in the MHz range, a preparation time is not negligible, which can cause an increase of the bunch-to-bucket injection center mismatch especially for the frequency beating method. The kicker control electronic must take the preparation time into consideration, igniting kickers in advance of the preparation time.

## 2.4. Synchronization of Extraction and Injection Kicker Magnets

---

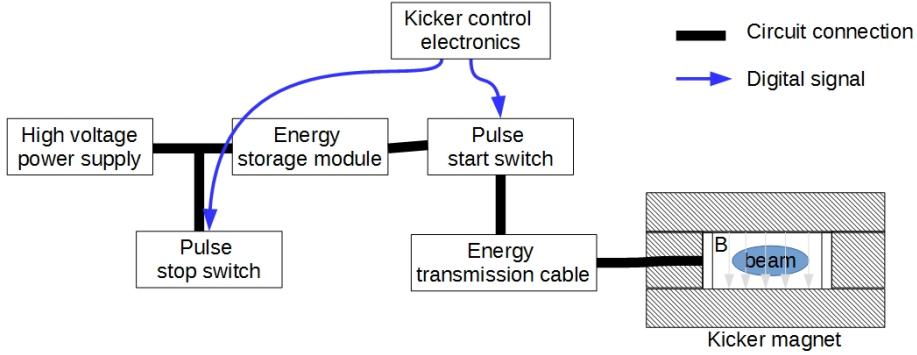


Figure 2.11: The schematic diagram of a kicker magnet.

Most commonly, an extraction kicker is used to eject all bunches. Fig. 2.12 illustrates the rise time, kicker flat-top and fall time of an extraction kicker. The tail of the circulating bunch passes the kicker at  $t_0$ . The start switch is switched on the preparation time earlier than  $t_0$ . The rise time starts at  $t_0$ . The kicker flat-top of the magnetic field must be achieved before the head of the next circulating bunch passes the kicker at  $t_1$ . So the rise time of the extraction kicker must be shorter than the bunch gap. The kicker flat-top has at least the length of bunches to be extracted. The stop switch is switched on earliest at  $t_2$ , when all bunches are extracted. Then there is no more bunch left in the synchrotron, so there is no constraint for the fall time.

For multiple batches injection, see Fig. 2.13, the tail of the circulating bunch passes the kicker at  $t_0$ . The start switch is switched on the preparation time earlier than  $t_0$ . The rise time starts at  $t_0$ . The kicker flat-top of the magnetic field must be achieved before bunches are injected at  $t_1$ . So the rise time of the injection kicker must be shorter than the bunch gap. The length of the kicker flat-top is determined by the length of bunches to be injected. The stop switch is switched on as soon as the tail of the last injected bunch passes the kicker at  $t_2$ . The magnetic field must be reduced to zero before the head of the circulating bunch passes the kicker at  $t_3$ . So the fall time must be shorter than  $t_3 - t_2$ .

## 2.4. Synchronization of Extraction and Injection Kicker Magnets

---

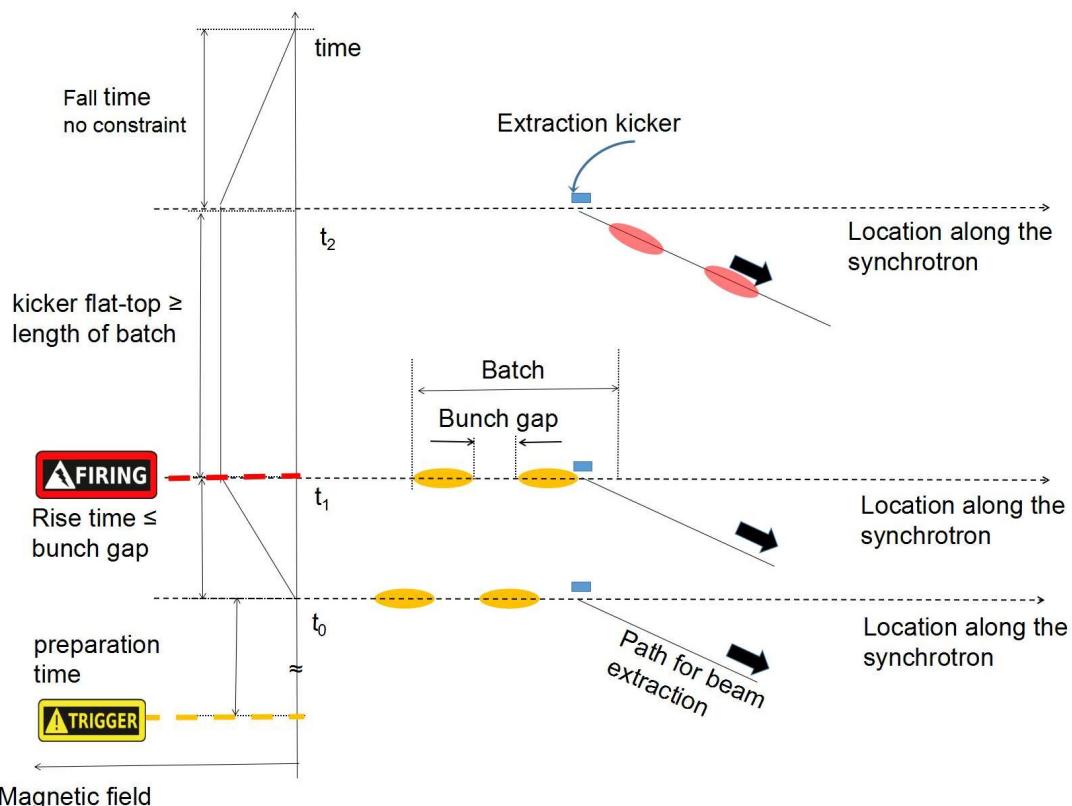


Figure 2.12: The rise time, kicker flat-top and fall time of an extraction kicker.

Yellow ellipses represent circulating bunches in the synchrotron, red ones extracted bunches. The warning sign indicates the kicker trigger and the flash sign indicates the kicker firing.

## 2.4. Synchronization of Extraction and Injection Kicker Magnets

---

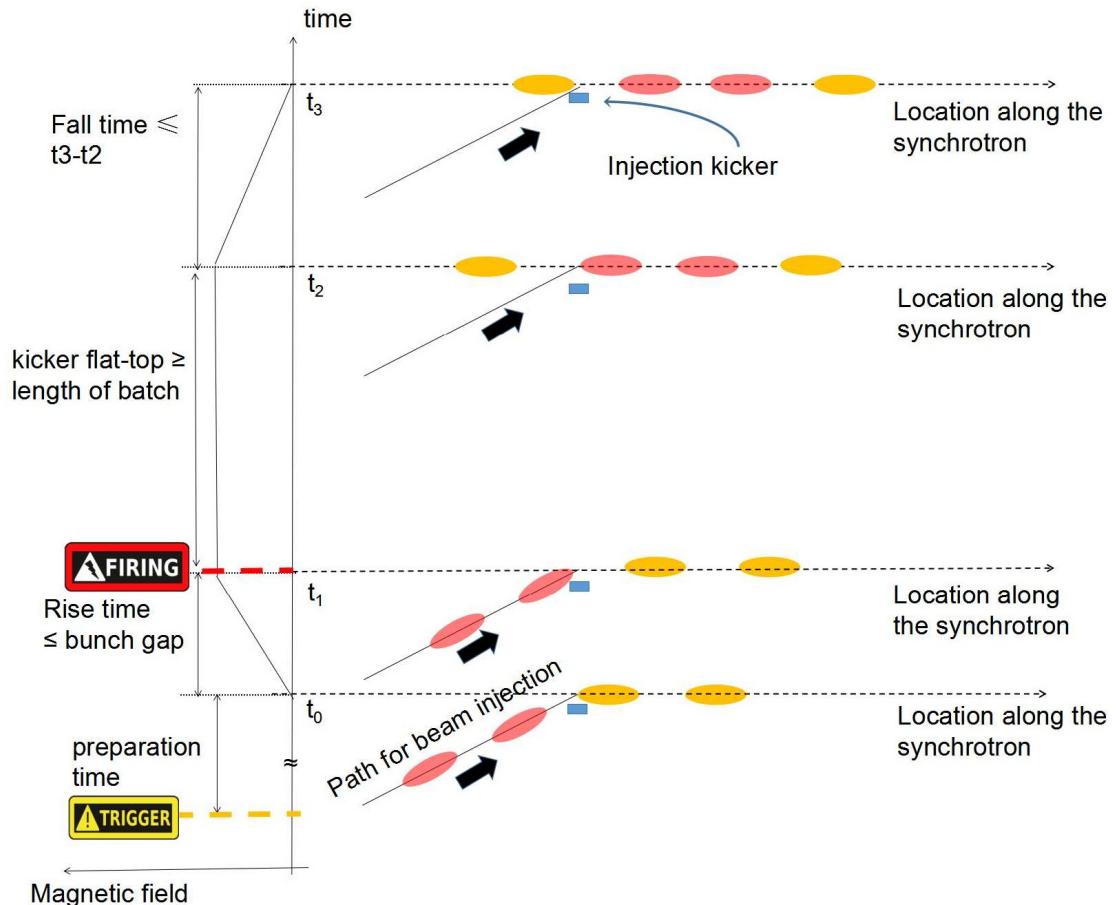


Figure 2.13: The rise time, kicker flat-top and fall time of an injection kicker for multiple batches injection.

*Yellow ellipses represent circulating bunches in the synchrotron, red ones bunches to be injected.*

# Chapter 3

## Technical Basis for FAIR B2B Transfer System

For the FAIR accelerator complex, synchronization of the B2B transfer will be realized by the FAIR control system and the Low-Level RF (LLRF) system. For the synchronization of LLRF system, the General Machine Timing (GMT) system is complemented and linked to the Bunchphase Timing System (BuTiS). Machine Protection System (MPS) protects SIS100 and subsequent accelerators or experiments from damage. Hence, the B2B transfer system for FAIR coordinates with the MPS system.

### 3.1 FAIR Control System

The FAIR control system takes advantage of collaborations with CERN in using framework solutions like Front-End System Architecture (FESA) [? ], LHC Software Architecture (LSA), White Rabbit (WR) [? ]. It consists of the equipment layer, middle layer and application layer. The equipment layer consists of equipment interfaces, GMT and software representations of the equipment FESA. The middle layer provides service functionality both to the equipment layer and the application layer through the IP control system network. LSA is used for the Settings Management (SM). The application layer combines the applications for operators as GUI applications or command line tools. The application layer and the middle layer only request what the FAIR accelerator complex should do and transmit set values to the equipment layer. Before an accelerator cycle is started, the setting properties of FESA are pre-supplied by LSA from SM for all scheduled beams with specific settings accordingly. At run time, FESA real time software actions are triggered by timing message, the actual beam specific data is then selected based on information carried by the timing message and send to the equipment [? ].

#### 3.1.1 Bunch Phase Timing System

Bunch Phase Timing System (BuTiS) serves as a campus-wide clocks distribution system with sub nanosecond resolution and stability over distances of several hundred meters while maintaining 100 ps per km timing stability [? ]. Two BuTiS reference clocks 100 kHz P0 pulse and 10 MHz S1 phase reference signal are generated centrally in the BuTiS center. A star-shaped optical fiber BuTiS distribution

### **3.1. FAIR Control System**

---

system transfers these two reference clocks to the BuTiS local reference synthesizer all over the FAIR campus. The optical signal transmission delay between the BuTiS center and the different BuTiS local reference synthesizer is measured by a measurement setup in the BuTiS center. This measurement information is used to correct the phases of the signals generated in each BuTiS local reference synthesizer for the delay compensation. So at each BuTiS reference synthesizer, two delay compensated clock signals, 200 MHz C2 sine and 100 kHz T0 ident clocks, are generated from 100 kHz P0 and 10 MHz S1 reference clocks [? ? ]. The main task of BuTiS is the supply of the reference clock signals for phase measurement signal rf systems, see Sec. 3.2.

#### **3.1.2 General Machine Timing System**

The GMT system is contained in the equipment layer. It synchronizes all Front End Controllers (FEC) with nanosecond accuracy over the whole FAIR campus and distributes timing messages to all FECs and controls all FECs to execute real-time actions at a designated time [? ]. The GMT system is a time based system. The GMT consists of the Timing Master (TM), the White Rabbit (WR) timing network and FECs. The timing master is a logical device, containing the data master (DM), the clock master (CM) and the management master (MM). The data master receives a schedule for the operation of the FAIR accelerator complex from the Settings Management and provides the real-time schedule by broadcasting timing messages to the WR timing network, which will be received and executed by the corresponding equipment connected to the FECs at the designated time. The clock master is a dedicated WR switch. It is the topmost switch layer of the WR timing network and provides the grandmaster clock and timestamps which are distributed to all other FECs in the timing network. The clock master derives its clock from BuTiS 200 MHz C2 and 100 kHz T0 clocks and timestamps distributed are phase locked to BuTiS clocks. The GMT system could generate BuTiS T0 and C2 with any FECs and FECs are capable to timestamp BuTiS T0 clocks and positive zero-crossings of BuTiS C2. All active components including FECs and WR switches are registered to the MM. The MM monitors and manages the active components of the GMT system [? ? ]. The Scalable Control Unit (SCU) is a new generation of the standard FEC for the FAIR control system, which provides a compact and flexible solution for controlling all types of accelerator equipment.

A timing message is sent across the WR network, so it must be contained in the Ethernet frame. An Ethernet frame including one timing message has a length of 110 byte, which is called “timing frame” in this dissertation. A Virtual LAN (VLAN)<sup>1</sup> is a group of FECs in the WR network that is logically segmented by function or application, without regard to the physical locations of the FECs. All FECs in the WR network are assigned to the DM VLAN, within which the DM forwards broadcast timing telegrams downwards to all FECs.

#### **3.1.3 Settings Management**

The Settings Management (SM) is based on a physics model for accelerator optics, parameter space and overall relations between parameters and between accelerators.

---

<sup>1</sup>[https://en.wikipedia.org/wiki/Virtual\\_LAN](https://en.wikipedia.org/wiki/Virtual_LAN)

## 3.2. Low-Level RF System

---

It supports off-line generation of accelerator settings, sending these settings to all involved devices, and programming the schedule for the GMT system [? ]. The core component of SM is the LSA framework. A standardized LSA-API allows accessing data in a common way as basis for generic client applications for all accelerators. Using the LSA-API, applications can coherently modify settings [? ]. E.g. the LSA generates timing constraints (e.g. ramp curve) as well as the equipment's data settings (e.g. the current) for all devices derived from physics parameters (e.g. beam energy). For FAIR, LSA is extended to model the overall schedule of all accelerators. Beams are described as “Beam Production Chains“ to allow a description from beam source to beam target for settings organization and data correlation.

### 3.1.4 FESA

The FESA<sup>2</sup> is a framework used to fully integrate the large amount of front-end equipment into the accelerator control system. FESA was developed by CERN and has already been implemented into the CERN control system. Now it is developed further in collaboration with GSI for the FAIR project. For the FAIR project the necessary interaction with the FECs is realized by FESA. For a specific type of equipment, a FESA implementation accesses to the control interface of the equipment. The FESA class models the equipment as device, so the FESA output is called device class. The FEC use FESA to implement generic and equipment specific functions in form of the device classes. FESA provides JAVA based graphical user interfaces (GUI) to design, deploy, instantiate and test the device classes. Interaction with the equipment is synchronized with the GMT system [? ].

## 3.2 Low-Level RF System

The FAIR low-level rf (LLRF) system will be used in the existing synchrotrons SIS18 and ESR, as well as in the FAIR synchrotrons SIS100 and SIS300 and in CR, NESR, and RESR. It supports fast ramp rates and large frequency span for the acceleration of a variety of ion species, It supports different rf manipulations, including operation at different harmonic numbers, barrier bucket generation, bunch compression and longitudinal feedback. [? ].

Each rf supply room has a phase measurement signal distribution system shown in Fig. 3.1. The phase measurement signals in different supply rooms are synchronized by BuTiS. BuTiS 200MHz C2 and 100kHz T0 clock signals are generated by BuTiS receivers in different supply rooms in phase. In Fig. 3.1, a number of Group Direct Digital Synthesizer (DDS) units are located in each supply room, which are synchronized by BuTiS local reference. The Group DDS signals can be routed to the different cavity systems by a Switch Matrix. All cavities in a synchrotron could be providing with the same Group DDS signal. The cavities at different harmonic numbers could be realized by using Group DDS signals with different harmonic numbers and by adjusting the harmonic number at the Cavity DDS accordingly. The Group DDS concept allows to synchronize a variety of cavities in a very flexible way [? ].

All the cavities of the SIS18 are driven from one supply room. The SIS100 cavities will be gathered in five acceleration sections, each of them is driven by a

---

<sup>2</sup><https://www-acc.gsi.de/wiki/FESA/WhatIsFESA>

### 3.2. Low-Level RF System

---

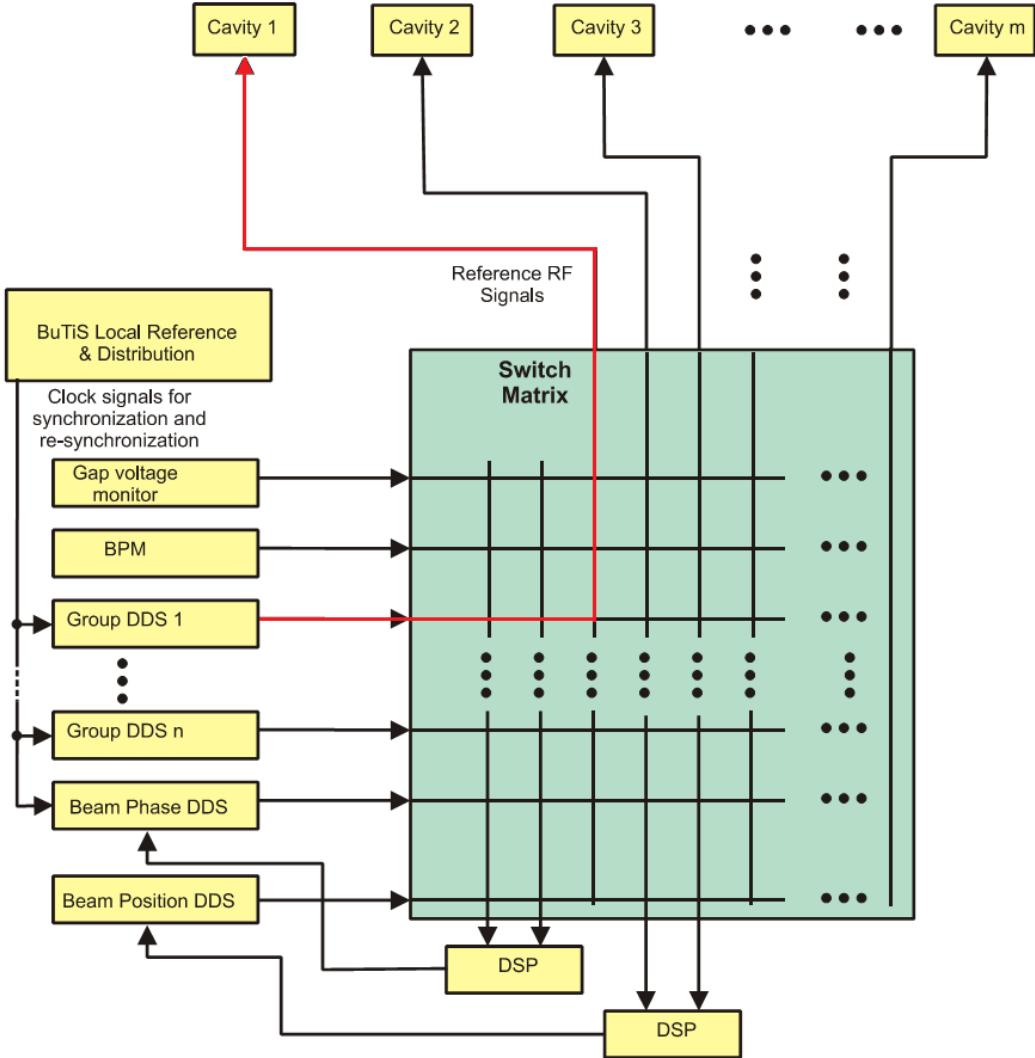


Figure 3.1: phase measurement signal distribution system

[? ]

dedicated supply room.

#### 3.2.1 Local Cavity Synchronization

All rf cavities are driven by one of phase measurement signals, which are generated in each supply room . Fig. 3.2 shows the local cavity synchronization system, which synchronizes the local Cavity DDS unit to the phase measurement signal with a specified phase offset. The cavity gets the rf signal from a local Cavity DDS unit, which receives rf frequency ramps from the Central Control System (CCS). A Digital Signal Processor (DSP)-System measures the phase difference between the phase measurement signal and the gap voltage of the cavity. In the DSP system, a closed-loop control algorithm is implemented, which generates frequency corrections for the local Cavity DDS unit. This process is called local synchronization loop, which ensures that the phase of the gap voltage follows the phase of the Reference RF signal [? ]. The path from the Group DDS 1 to Cavity 1 marked with the red line in Fig. 3.1 is realized by the local cavity synchronization in Fig. 3.2. The virtual rf

### 3.3. Machine Protection System

---

cavity is a virtual position around the ring, to which the phase measurement signal corresponds.

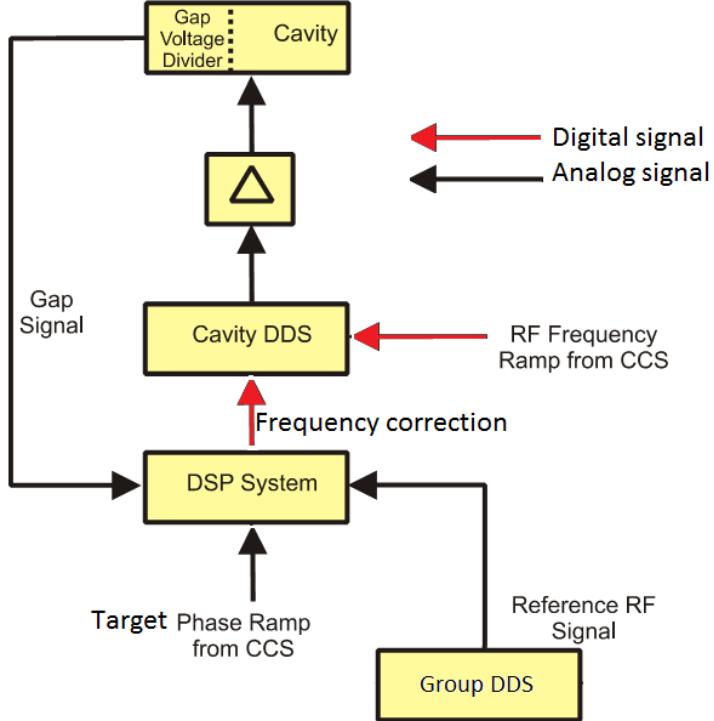


Figure 3.2: Local Cavity Synchronization  
[? ]

#### 3.2.2 Longitudinal Feedback System

In order to damp coherent longitudinal dipole oscillations, the beam phase control loop is used. The phase difference between the beam signal and the phase measurement signal is fed back via an FIR filter. The beam signal is obtained by a fast current transformer or a beam position monitor. The filter output is converted in a phase-correction and forwarded to the Group DDS. The corrections are added to the phase of the frequency ramp in the Cavity DDS, which results in a change of the phase of the gap voltage and thus a feedback to the beam [? ]. Unfortunately, the actual beam phase control loop in SIS18 is not able to damp incoherent longitudinal dipole oscillations. For SIS100, a bunch-by-bunch longitudinal feedback system will be developed. The bunch-by-bunch longitudinal feedback system generates a correction voltage in dedicated feedback cavities for a specified bunch [? ].

## 3.3 Machine Protection System

A MPS protects current accelerator and subsequent accelerators or experiments from damage or unacceptable failure, e.g. the beam position is out of tolerance, the rf cavity failure and so on. Thereby, the individual equipment is assumed self-protecting,

### **3.3. Machine Protection System**

---

which could triggers accelerator safety critical actions, such as an emergency beam dump <sup>3</sup>, a shutdown of magnets or a beam injection inhibit. In case of relevant equipment failures or other inappropriate equipment states, a MPS signal is generated from this equipment [? ]. The FAIR B2B transfer must coordinate with the SIS100 emergency dump signal and the beam injection inhibit signal from the MPS.

The SIS100 emergency dump signal indicates that the beam should be transferred to the emergency dump as soon as possible. If the beam injection inhibit signal is off, the B2B transfer extraction and injection kickers are allowed to be fired. If the beam injection inhibit signal is on, the injection and extraction kickers will be blocked for firing.

---

<sup>3</sup>A beam dump is a device designed to absorb the beam.

# Chapter 4

## Concept of FAIR B2B Transfer System

In this Chapter, the basic idea of the FAIR B2B transfer system is presented in Sec. 4.1. The standard procedure of the system is defined and described in Sec. 4.2. Sec. 4.3 illustrates how the basic functionality of the system are realized. In Sec. 4.4, the data flow of the system is described. In Sec. 4.5 the FAIR B2B transfer system is compared with the current B2B transfer.

### 4.1 Basic Idea

The basic idea of the B2B transfer is simple. First of all, two rf systems of the source and target synchrotrons must be correct phase aligned. Secondly, the trigger for the extraction and injection kickers must be synchronized with beam. In the end, the actual beam injection point must be indicated, which qualifies the beam instrumentation (BI) to measure the properties and the behavior of the beam directly after the injection.

#### 4.1.1 Phase Alignment

The phase alignment is one of the most important prerequisites for the B2B transfer. It guarantees that extracted bunches will hit the dedicated empty buckets at the correct time. The phase alignment is based on the synchronization frequencies, see Sec. 2.2. When two rf systems have an identical cavity rf frequency or slightly different cavity rf frequencies, two cavity rf frequencies are chosen as the synchronization frequencies. When two rf systems have hugely different cavity rf frequencies, two synchronization frequencies are an integer multiple of the same or slightly different derived rf frequencies, which are a fraction of the revolution frequencies. For more details about the calculation of the synchronization frequencies, see Sec. 2.2. If two synchronization frequencies of the two rf systems are same, the phase difference between the two rf systems is constant. The phase difference can be adjusted by the phase shift method or the frequency beating method with the frequency detuning on one (or both) rf system. If two synchronization frequencies of the two rf systems are slight different, the phase difference is adjusted automatically because of the beating frequency.

## 4.1. Basic Idea

---

Before the basic steps for the achievement of the phase alignment, some basic concepts and their symbols are introduced, see Fig. 4.1.

- The bucket delay  $t_{bucket}$ , which specifies a certain bucket to be injected by delaying a certain number of the rf period to a marker.
- The Time-Of-Flight (TOF) between two ring accelerators  $t_{TOF}$ .
- The Time-Of-Flight between the virtual rf cavity and the extraction/injection kicker,  $t_{v\_ext}$  and  $t_{v\_inj}$ .
- The sum of the kicker preparation time, the rise time and the propagation delay of the kicker trigger signal in the cable of an extraction kicker and that of an injection kicker,  $t_{ext}$  and  $t_{inj}$ .

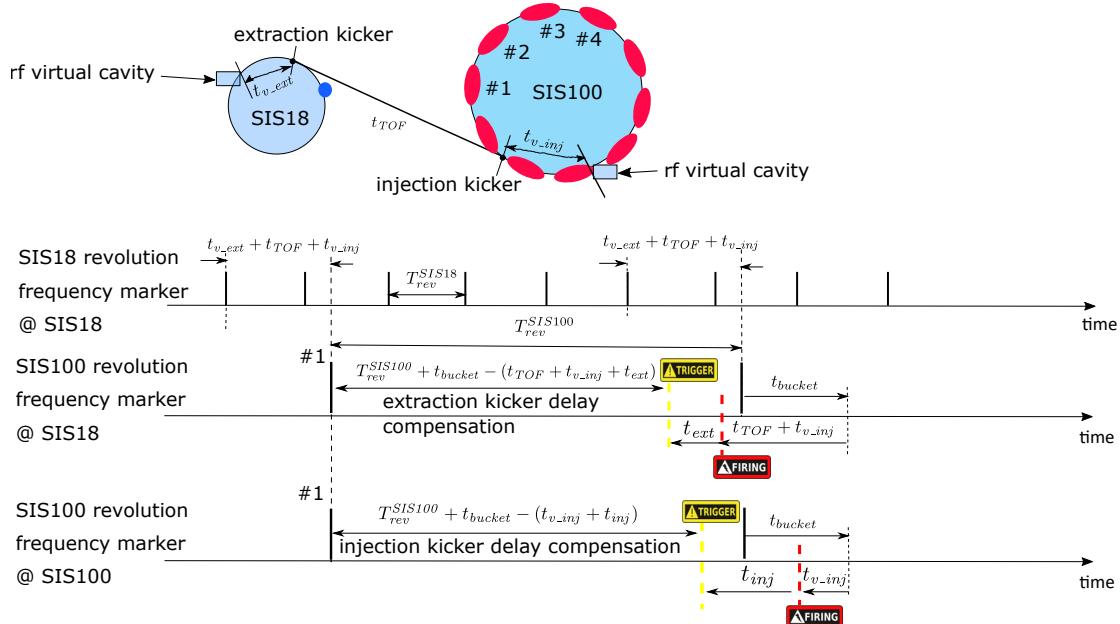


Figure 4.1: The illustration of the B2B transfer from the SIS18 to the SIS100.

*The blue dot represents a bunch, red ones buckets.*

Fig. 4.1 illustrates the B2B transfer from the SIS18 to the SIS100. The SIS18  $U^{28+}$  super cycle consists of four SIS18 cycles. Each cycle produces two  $U^{28+}$  bunches. From the SIS18, four batches, each of two bunches, are injected into eight out of ten buckets of the SIS100. The SIS18  $H^+$  super cycle consists of four SIS18 cycles. Each cycle produces one  $H^+$  bunch. From the SIS18, four batches, each of one bunch, are injected into four out of ten buckets of the SIS100 [? ? ]. The SIS18 and SIS100 revolution frequency markers (black bars on the first time axis and bars on the second/third time axis in Fig. 4.1) indicate the time when a bunch or the first bucket (#1) pass by the virtual rf cavity. The extraction and injection kicker trigger have a delay with respect to the first bars of the SIS100 revolution frequency marker at the SIS18 and at the SIS100. This delay is called the “extraction/injection kicker delay compensation”. The mentioned four instances of time are related to

## 4.1. Basic Idea

---

the second bars of the SIS100 revolution frequency marker.  $T_{rev}^X$  represents the revolution period of the synchrotron X, e.g. the SIS18 revolution period is  $T_{rev}^{SIS18}$ .  $T_{rf}^X$  represents the period of the cavity rf frequency of the synchrotron X, e.g. the SIS18 rf period of the cavity rf frequency is  $T_{rf}^{SIS18}$ . After the rf phase alignment, the time difference between the SIS18 and SIS100 synchronization frequency (denoted as  $t_{diff\_sync}$ ) for the  $U^{28+}$  and  $H^+$  odd bucket injection is

$$t_{diff\_sync} = (t_{v\_ext} + t_{TOF} + t_{v\_inj}) \bmod 1/f_{syn}^{trg} \quad (4.1)$$

For the  $H^+$  even bucket injection  $t_{diff\_sync}$  is

$$t_{diff\_sync} = (t_{v\_ext} + t_{TOF} + t_{v\_inj} - T_{rf}^{SIS100}) \bmod 1/f_{syn}^{trg} \quad (4.2)$$

The phase alignment for the odd or even bucket injection is informed by the “extra phase shift“ from the SM. For more details about the use cases of the B2B transfer from the SIS18 to the SIS100, please see Sec. 6.1.1 and Sec. 6.1.2. For more details about the parameters of the B2B transfer system from the SM, please see Appendix E.

For the phase alignment, the steps below must be carried out.

1. The measurement of the phase of the rf system and the corresponding timestamp in each synchrotron.
2. The exchange of the measured phase and the timestamp.
3. The phase comparison between the two rf systems.
4. The adjustment of the phase on one (or both) rf system, when the phase shift method is used.
5. The calculation of the time duration for the required phase alignment of the two rf systems.

### 4.1.2 Trigger of Extraction and Injection Kickers

For the proper B2B transfer, not only the relative position of bunches and buckets, but also the firing of the extraction and injection kickers must be precisely controlled. The extraction kicker must kick the bunch exactly the time-of-flight earlier before a specific bucket passes the injection kicker and the transition of the magnetic field must be carried out during the bunch gap. For the calculation of the trigger time for the extraction and injection kickers, the following steps must be processed.

1. The kicker firing requires the bunch-to-bucket injection center phase mismatch within a upper bound, which defines a “coarse synchronization“.
2. The bucket label requires the kicker firing based on a bucket indication signal for the first bucket (e.g. the SIS100 revolution frequency markers in Fig. 4.1) plus a fixed delay (the extraction/injection kicker delay compensation), for more details please see Sec. 4.3.5. With the help of the bucket label, bunches are injected into correct buckets. This process is called the “fine synchronization“.

## 4.1. Basic Idea

---

### 4.1.2.1 Bucket Indication Signal

The bucket indication signal of the phase shift method or the frequency beating method indicates the passing time of the first bucket of the target synchrotron, when the first bucket is correct or periodical phase aligned with a bunch of the source synchrotron for the bunch-to-bucket injection. For FAIR use cases, we have  $f_{syn}^X = Y \cdot f_{rev}/m$  and either  $m/Y$  or  $Y/m$  must be an integer, see Sec. 2.2. There exist either that the revolution period is the integer times of the period of the synchronization frequency or that the period of the synchronization frequency is the integer times of the revolution period. The first bucket of the target synchrotron is indicated by  $f_{rev}^{trg}$ . The correct or periodical phase alignment of the rf system of the target synchrotron with the rf system of the source synchrotron is indicated by  $f_{syn}^{trg}$ . Hence, the bucket indication signal (denoted as “ $f_{bucket}$ ”) is either with the revolution frequency or the synchronization frequency of the target synchrotron. It depends on the relation between the revolution frequency and the synchronization frequency of the target synchrotron. When the synchronization frequency of the target synchrotron is greater than or equal to the revolution frequency of the target synchrotron, namely the period of the synchronization frequency is equal to or less than the revolution period, the period of the synchronization frequency is not long enough to include all buckets. In this case, the frequency of the bucket indication signal equals to the revolution frequency of the target synchrotron and the length of the synchronization window equals to one revolution period. On the contrary, the frequency of the bucket indication signal equals to the synchronization frequency of the target synchrotron and the length of the synchronization window equals to the period of the synchronization frequency. The frequency of the bucket indication signal is expressed as

$$f_{bucket} = \begin{cases} f_{rev}^{trg} & f_{syn}^{trg} \geq f_{rev}^{trg} \\ f_{syn}^{trg} & f_{syn}^{trg} < f_{rev}^{trg} \end{cases} \quad (4.3)$$

The corresponding length of the synchronization window is expressed as

$$T_w = \frac{1}{f_{bucket}} \begin{cases} T_{rev}^{trg} & f_{syn}^{trg} \geq f_{rev}^{trg} \\ T_{syn}^{trg} & f_{syn}^{trg} < f_{rev}^{trg} \end{cases} \quad (4.4)$$

Fig. 4.2 shows one example when the frequency of the bucket indication signal equals to the revolution frequency of the target synchrotron. Fig. 4.3 shows one example when the frequency of the bucket indication signal equals to the synchronization frequency of the target synchrotron.

### 4.1.2.2 Extraction and Injection Kicker Delay Compensation

The calculation of the extraction and injection kicker delay compensation is explained in this section.

- Extraction kick

In order to inject into specific buckets, the extraction kicker delay compensation for the first bar of the SIS100 revolution frequency marker is  $T_{rev}^{SIS100} + t_{bucket}$ , see Fig. 4.1. For example, when two  $U^{28+}$  bunches of the SIS18 are

#### 4.1. Basic Idea

---

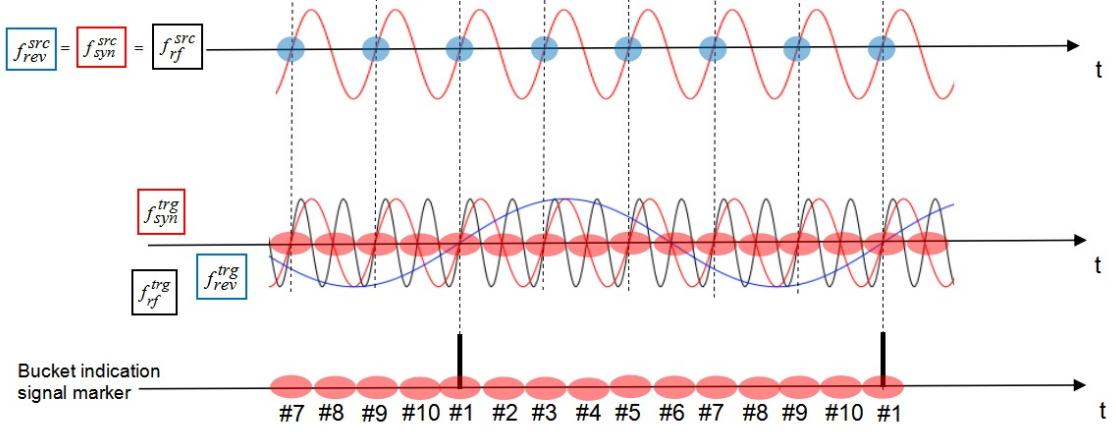


Figure 4.2: The frequency of the bucket indication signal equals to the revolution frequency of the target synchrotron.

*Red dots represent buckets of the target synchrotron and blue ones represent bunches of the source synchrotron. This example is the FAIR use case of the H<sup>+</sup> B2B transfer from the SIS18 to the SIS100. The correct phase alignment of the two rf systems is assumed with  $\Delta\phi_{syn} = 0^\circ$  and only the buckets with the odd number (e.g. #1, #3) are to be filled in this example.*

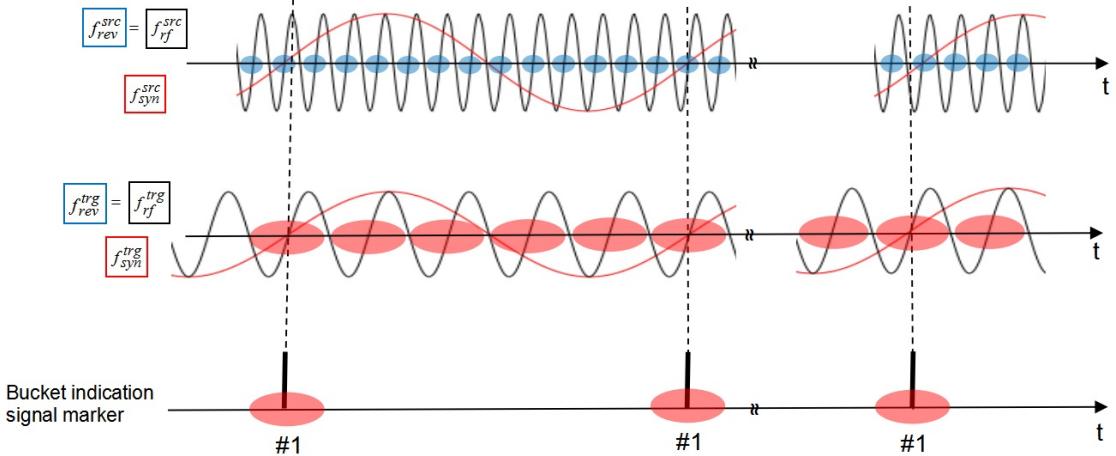


Figure 4.3: The frequency of the bucket indication signal equals to the synchronization frequency of the target synchrotron.

*Red dots represent buckets of the target synchrotron and blue ones represent bunches of the source synchrotron. This example is the FAIR use case of the B2B transfer from the CR to the HESR.*

to be injected into buckets #3 and #4 of the SIS100,  $t_{bucket} = 1 \cdot T_{rev}^{SIS18}$ . The extraction kicker must be fired  $t_{v\_inj} + t_{TOF} + t_{ext}$  earlier as the bucket passes the virtual rf cavity, so the extraction kicker delay compensation is  $T_{rev}^{SIS100} + t_{bucket} - (t_{TOF} + t_{v\_inj} + t_{ext})$ .

- Injection kick

With the consideration of the bucket pattern, the injection kicker delay com-

### 4.3. Realization

---

pensation for the first bar of the SIS100 revolution frequency marker is  $T_{rev}^{SIS100} + t_{bucket}$ , see Fig. 4.1. The injection kicker must be fired  $t_{v\_inj} + t_{inj}$  time earlier as the bucket passes the virtual rf cavity, so the injection kicker delay compensation is  $T_{rev}^{SIS100} + t_{bucket} - (t_{v\_inj} + t_{inj})$ .

## 4.2 Basic Procedure

Fig. 4.4 illustrates the basic procedure of the B2B transfer with two different synchronization scenarios. The yellow region shows the synchronization window. The purple region shows the valid time for the emergency kicker.

The B2B transfer process basically needs to follow the six steps [? ]:

1. The DM announces the B2B transfer and requests the switch off of the beam feedback loops on the rf system, when required.
2. Two synchrotrons measure the rf phase locally.
3. The source synchrotron receives the measured rf phase from the target synchrotron.
4. The source synchrotron does the B2B related calculation.
  - The source synchrotron calculates the synchronization window and sends it to the target synchrotron and to the DM.

The source synchrotron generally accomplishes the phase alignment in case of the phase shift method. A particular case is the empty target synchrotron. The phase alignment can be achieved very fast and simple by the phase jump at the target synchrotron. Although the synchronization window is theoretically infinite for the phase shift method, bunches should be transferred as soon as the phase shift is done, in order to guarantee the stability of the beam. For both synchronization methods, the synchronization window has a certain length.
  - Besides, the bucket indication signal is reproduced at the source synchrotron for the indication of the 1<sup>st</sup> bucket.
5. The trigger signals with the delay compensation are generated for the kickers.
6. The kicker electronic fire the kickers. The extraction and injection kicker trigger and firing timestamp are sent to the source synchrotron for the B2B status check. The actual beam injection timestamp and the B2B transfer status are send from the source synchrotron to the DM and the DM sends them further to the BI.

## 4.3 Realization

This section describes the realization of the FAIR B2B transfer system based on the FAIR control system and LLRF system introduced in Chap. 3.

The phase alignment is based on the phase difference between two synchronization frequencies. Because it is not preferable to have a direct connection between two

### 4.3. Realization

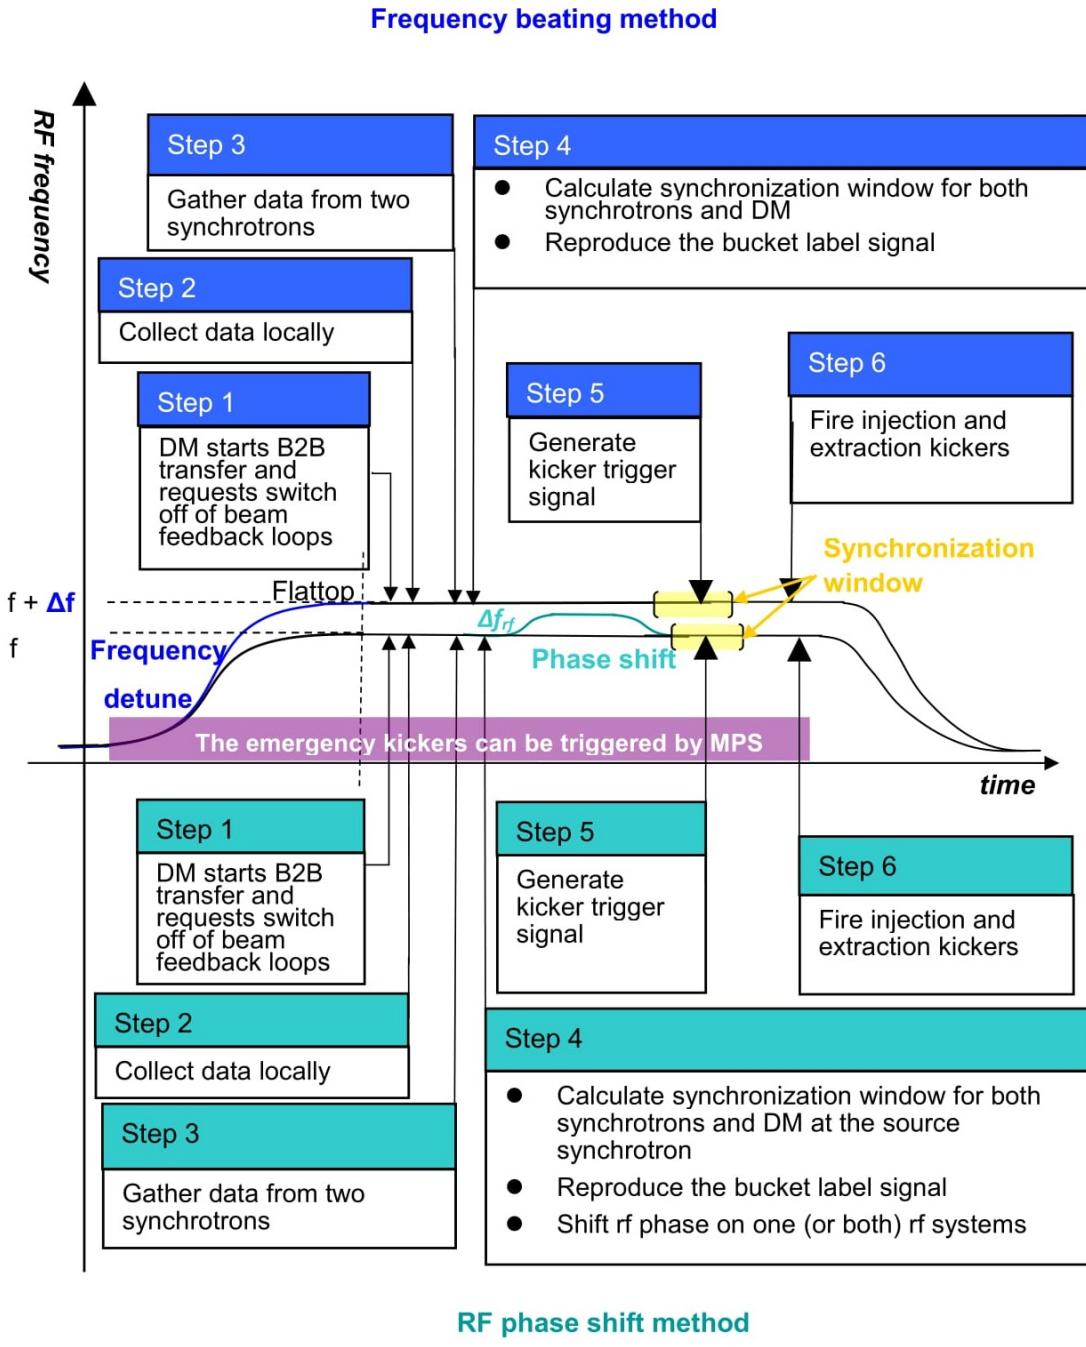


Figure 4.4: The procedure for the B2B transfer within one acceleration cycle.

As illustrated here the procedure with the frequency beating method (blue, top) and that with the phase shift method (green, bottom).

ring accelerators around such a big FAIR campus for a direct phase measurement based on the existing technical basis, a shared reference sinusoidal signal (which is called “synchronization reference signal” and denoted as  $f_{ref}$ ) is used for the indirect phase difference measurement. The synchronization reference signal has a fixed frequency and is always in phase in different supply rooms. It is a sinusoidal wave, whose frequency is a multiple of BuTiS T0 100 kHz and whose positive zero-crossings are always aligned with the first positive zero-crossings of C2 clocks after T0 edges

### 4.3. Realization

---

(which is called the “T0 incidents“) [? ? ]. Thus, the synchronization reference signal is synchronous in different supply rooms by definition. The phase measurement of each rf system is based on the frequency beating between the synchronization frequency and the synchronization reference signal, achieved by measuring the phase deviation between these two frequencies (denoted by  $\phi^X$ ), see Fig. 4.5.

$$\phi^X(t) = [2\pi(f_{syn}^X - f_{ref})t + \phi_0^X] \bmod 2\pi - \pi \quad (4.5)$$

where  $\phi_0^X$  is the initial value of the phase deviation between the synchronization frequency and the synchronization reference signal.  $\phi^X(t)$  is within the range between  $-\pi$  and  $\pi$ , which is determined by the realization of the phase deviation measurement, for more details, please see “Development of the LLRF system for a deterministic Bunch-to-Bucket transfer for FAIR“ [? ].

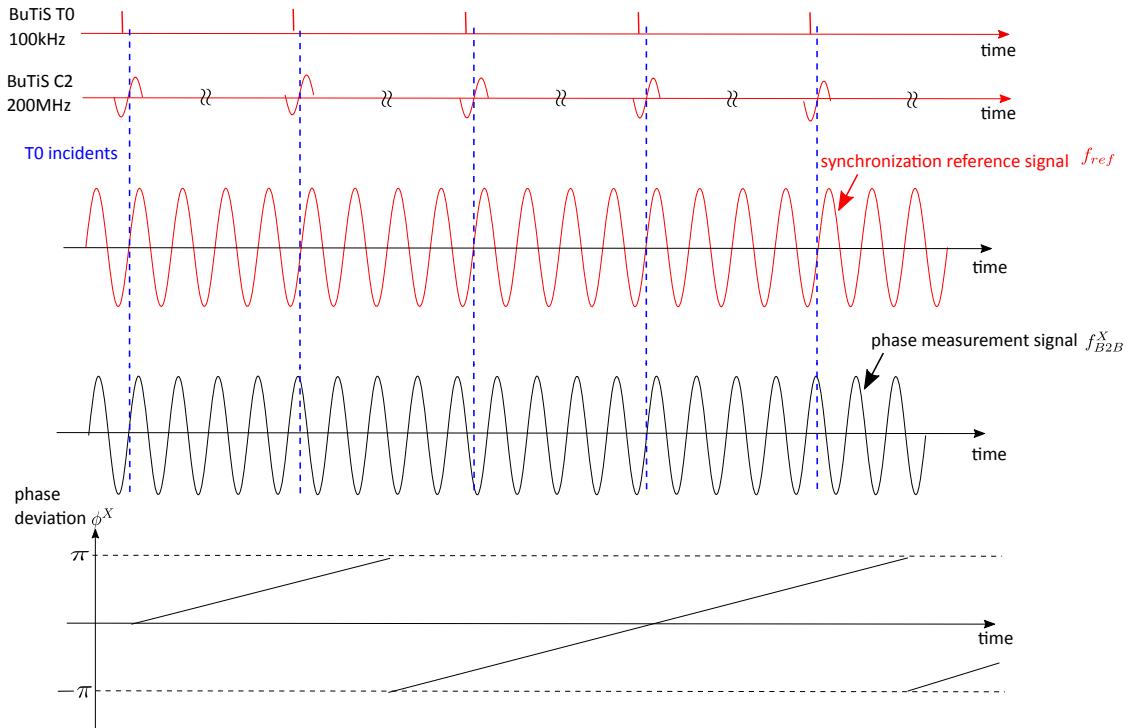


Figure 4.5: The phase deviation between the synchronization frequency and the synchronization reference signal.

The phase difference between two synchronization frequencies (denoted as  $\Delta\phi_{syn}$ ) is calculated by the subtraction of the phase deviation of the source synchrotron from that of the target synchrotron.

$$\Delta\phi_{syn}(t) = \phi^{trg}(t) - \phi^{src}(t) = [2\pi(f_{syn}^{trg} - f_{syn}^{src})t + (\phi_0^{trg} - \phi_0^{src})] \bmod 2\pi \quad (4.6)$$

From eq. 4.6, we know that the phase difference between two synchronization frequencies is independent of the choice of the synchronization reference signal. For the phase shift method,  $\Delta\phi_{syn}(t)$  is constant because of  $f_{syn}^{trg} = f_{syn}^{src}$ . For the frequency beating method,  $\Delta\phi_{syn}(t)$  is a periodical variable, whose period is  $1/(f_{syn}^{trg} - f_{syn}^{src})$ .

For the reproduction of the bucket indication signal at the source synchrotron, the phase deviation between the bucket indication signal and the synchronization

### 4.3. Realization

---

reference signal (denoted by  $\varphi^{trg}$ ) needs to be measured at the target synchrotron.

$$\varphi^{trg}(t) = [2\pi(f_{bucket} - f_{ref})t + \varphi_0^{trg}] \mod 2\pi - \pi \quad (4.7)$$

where  $\varphi_0^{trg}$  is the initial value of the phase deviation between the bucket indication signal and the synchronization reference signal.

The actual phase of the bucket indication signal is irrelevant to the synchronization reference signal. In order to get rid of the effect of the synchronization reference signal, the extrapolated phase deviation at T0 incidents, denoted as  $\varphi^{trg}(T0)$ , will be used for the reproduction of the bucket indication signal at the source synchrotron, because the synchronization reference signal is a sinusoidal wave, whose phase is 0° at T0 incidents. For the target synchrotron, the extrapolated phase deviation between the synchronization frequency and the synchronization reference signal at T0 incidents, denoted as  $\phi^{trg}(T0)$ , can be deduced from  $\varphi^{trg}(T0)$ , because the phase of the high harmonic frequency can be deduced from that of the low harmonic frequency.

$$\phi^{trg}(T0) = \begin{cases} \varphi^{trg}(T0) \mod 2\pi & f_{bucket} = f_{syn}^{trg} \\ \frac{h_{syn}^{trg}}{h_{rev}^{trg}} \varphi^{trg}(T0) \mod 2\pi & f_{bucket} = f_{rev}^{trg} \end{cases} \quad (4.8)$$

Hence, the measurement of the phase deviation between the bucket label signal and the synchronization reference signal at the target is enough for both the phase alignment and the reproduction of the bucket indication signal. It reduces the data transfer of the system and the transfer delay on the WR network. Besides, every phase deviation measurement and extrapolation process needs 500 µs, so one phase deviation measurement is preferred due to the time constraints (see Chap. 5).

The frequency used for the phase deviation measurement is called “phase measurement signal” and denoted as  $f_{B2B}^X$ . For the target synchrotron, the phase measurement signal is the bucket indication signal, namely

$$f_{B2B}^{trg} = f_{bucket} = \begin{cases} f_{syn}^{trg} & f_{bucket} = f_{syn}^{trg} \\ f_{rev}^{trg} & f_{bucket} = f_{rev}^{trg} \end{cases} \quad (4.9)$$

For the source synchrotron, the frequency of the phase measurement signal is calculated as

$$f_{B2B}^{src} = \begin{cases} f_{syn}^{src} & f_{bucket} = f_{syn}^{trg} \\ \frac{h_{rev}^{trg}}{h_{syn}^{trg}} f_{syn}^{src} & f_{bucket} = f_{rev}^{trg} \end{cases} \quad (4.10)$$

For some cases,  $f_{B2B}^{src}$  is even smaller than the revolution frequency, e.g.  $f_{B2B}^{CR} = f_{B2B}^{CR}/13$  for the case of the B2B transfer from the CR to the HESR, for more details, please see Chap. 6.

The frequency of the synchronization reference signal  $f_{ref}$  is determined by  $f_{bucket}$  and calculated as

$$f_{ref} = \text{round}(f_{bucket}/100 \text{ kHz}) \cdot 100 \text{ kHz} \quad (4.11)$$

The function *round* rounds  $f_{bucket}/100 \text{ kHz}$  up or down to an integer value, which is closest to  $f_{bucket}/100 \text{ kHz}$ . e.g.  $f_{bucket} = f_{rev}^{SIS100} = 157.254 \text{ kHz}$ ,  $f_{bucket}/100 \text{ kHz} = 1.57$ , so  $\text{round}(f_{bucket}/100 \text{ kHz}) = 2$  and  $f_{ref} = 200 \text{ kHz}$ . This is the FAIR use case

## 4.3. Realization

---

of the  $U^{28+}$  B2B transfer from the SIS18 to the SIS100, for more details, please see Chap. 6. When  $|f_{bucket}/100\text{ kHz}| < 1$ ,  $f_{ref} = 100\text{ kHz}$ . For the detailed realization of the synchronization reference signal, please see “Development of the LLRF system for a deterministic Bunch-to-Bucket transfer for FAIR“ [? ].

The measurement and extrapolation of the phase deviation is based on the frequency beating between the phase measurement signal and the synchronization reference signal, so the frequency difference between these two signals mustn’t be too large. The extrapolation of the phase deviation requires at least two samples for every beating period and the sample time is  $3.22\text{ }\mu\text{s}$  [? ], so the maximum beating frequency is approximately  $150\text{ kHz}$ .

### 4.3.1 Phase Measurement and corresponding Timestamp of each Rf System

The rf frequencies in the source and target synchrotron need to be stable and constant during the B2B transfer process. The phase measurement of each rf system follows the principles as shown below.

1. The measurement of the actual phase values.
2. The extrapolated phase values into the future based on the measured phase values.
3. The timestamp for the extrapolated phase values.

#### 4.3.1.1 Measurement of Actual Phase Values of each Rf System

The phase measurement of each rf system is achieved by measuring the phase deviation between the phase measurement signal and the synchronization reference signal of a synchrotron. The phase deviation (denoted by  $\varphi^X$ ) has a linear relationship with time, whose range is from  $-\pi$  to  $+\pi$ .

$$\varphi^X(t) = [(k^X t + \varphi_0^X) \bmod 2\pi] - \pi \quad (4.12)$$

where  $k^X$  is the slope of the phase deviation, namely  $k^X = 2\pi(f_{B2B}^X - f_{ref})$  and  $\varphi_0^X$  the initial value of the phase deviation.

Fig. 4.6 shows the phase measurement of the rf system at a dedicated synchrotron. The red sinusoidal wave represents the synchronization reference signal (e.g. 200 kHz) in a supply room and the black wave the phase measurement signal (e.g. 157.254 kHz) from the Group DDS. The phase deviation between the phase measurement signal and the synchronization reference signal is measured by the Phase Advance Measurement (PAM) module at the source synchrotrons and at the target synchrotron. The phase deviation measurement is performed synchronously to an internal clock, which is represented by the blue dots. This measurement is asynchronously to the BuTiS reference clock. The measured phase deviation can be expressed as

$$\varphi^X(nT_{sample\_PAM}) = [(k^X \cdot nT_{sample\_PAM} + \varphi_0^X) \bmod 2\pi] - \pi \quad (4.13)$$

where  $T_{sample\_PAM}$  is the measurement sampling period of the phase deviation by the PAM module.

### 4.3. Realization

---

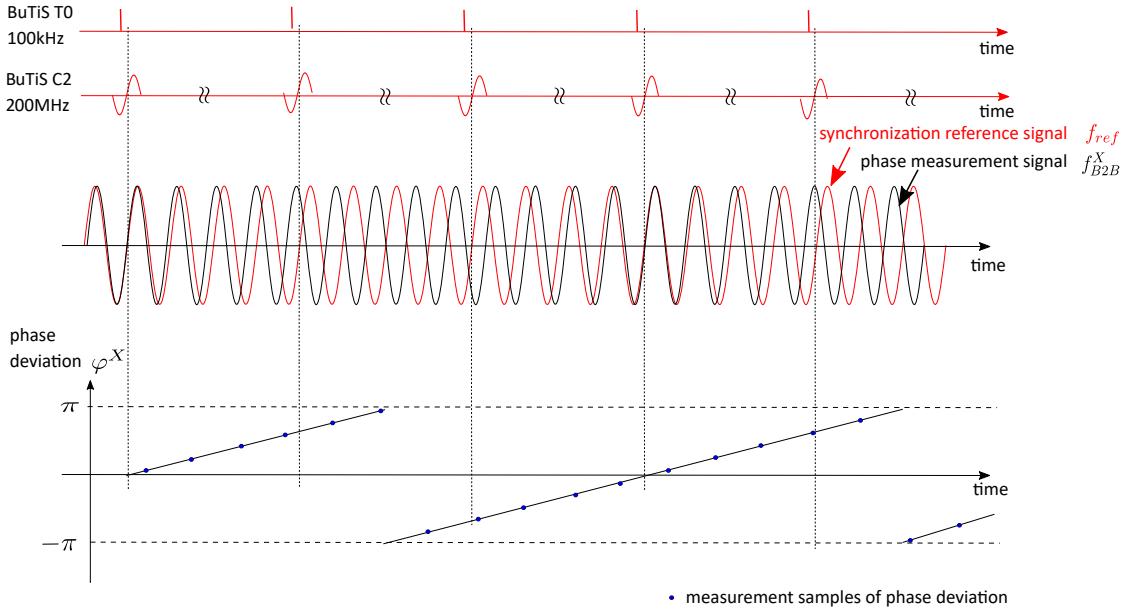


Figure 4.6: The realization of the phase deviation measurement at one synchrotron

For more details about the implementation and realization of the PAM module, please see “Development of the LLRF system for a deterministic Bunch-to-Bucket transfer for FAIR“ [? ].

#### 4.3.1.2 Phase Extrapolation of each Rf System

The phase deviation can be extrapolated due to the linear relationship between time and the phase deviation.

Based on a series of the measured samples of the phase deviation, the phase deviation at the T0 incidents (denoted by  $\psi^X$  and called the “extrapolated phase advance“) are extrapolated at the source and target synchrotrons by the Phase Advance Prediction (PAP) Module.

$$\psi^X(n) = \varphi^X(nT_{sample\_PAP}) \quad (4.14)$$

where  $T_{sample\_PAP}$  is the extrapolation sampling period of the phase extrapolation by the PAP module,  $T_{sample\_PAP} = 1/100\text{ kHz}$ .

The extrapolated phase advance,  $\psi^{src}$  and  $\psi^{trg}$  at the source and target synchrotron, is represented by red diamonds in Fig. 4.7. Because the phase advance is extrapolated at the T0 incidents and the synchronization reference signal is zero phase aligned with the T0 incidents,  $\psi^{src}$  and  $\psi^{trg}$  are the phase of the phase measurement signals at the virtual rf cavities of two ring accelerators at the T0 incidents (represented as black dots in Fig. 4.7). For more details about the implementation and realization of the PAP module, please see “Development of the LLRF system for a deterministic Bunch-to-Bucket transfer for FAIR“ [? ].

#### 4.3.1.3 Timestamp of Extrapolated Phase

The extrapolated phase advance is synchronized with T0 incidents by the PAP module, but it is not synchronized with the absolute time. This is one of the tasks

### 4.3. Realization

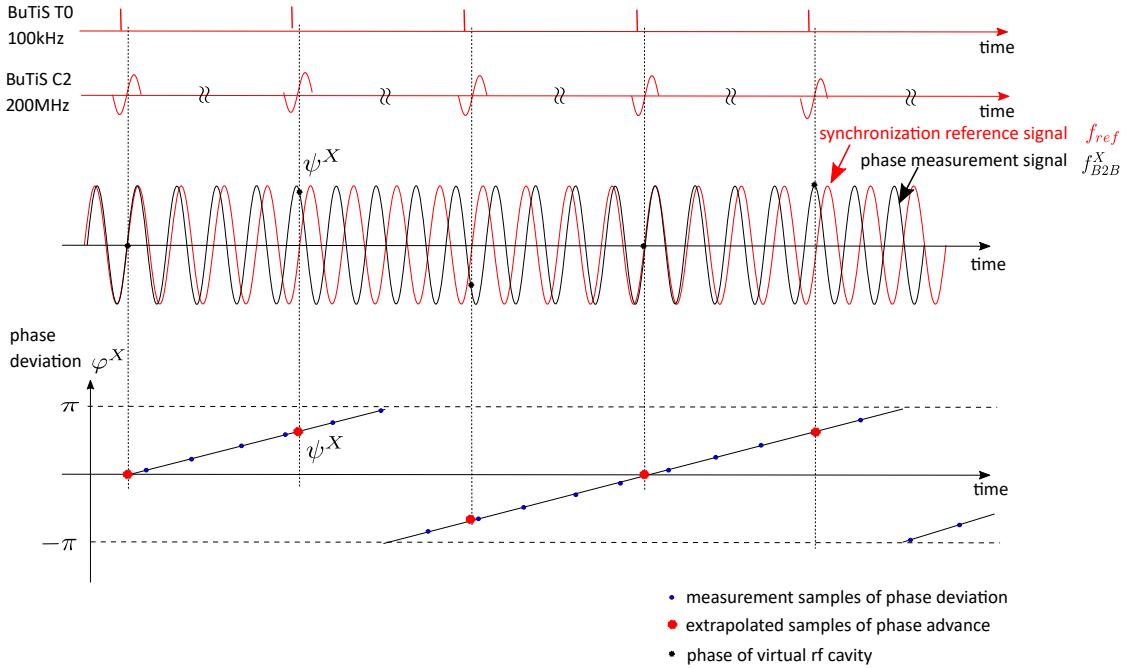


Figure 4.7: The realization of the phase advance extrapolation at one synchrotron

of the multi-purpose B2B source and target SCUs [? ? ], which are located in the source and target synchrotrons. The PAP module is a SCU slave<sup>1</sup>, respectively integrated into the B2B source SCU and B2B target SCU, see Fig. 4.8. Both the B2B source and target SCUs could get the timestamp of the T0 incidents.

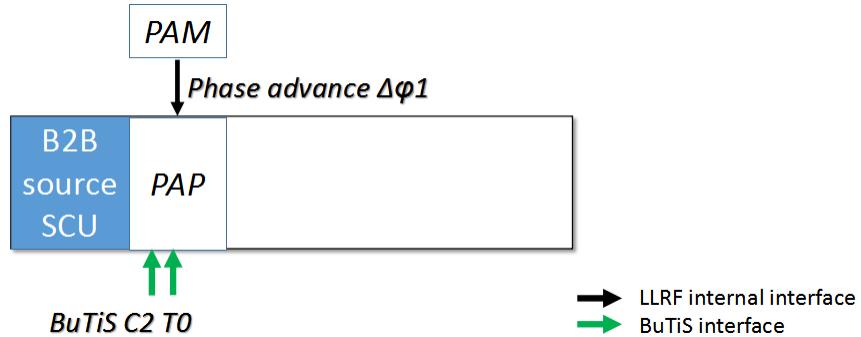


Figure 4.8: Integration of the Phase Advance Prediction Module into the B2B source SCU

Fig. 4.9 illustrates the synchronization of the extrapolated phase to the timestamp. The DM broadcasts the timing frame of CMD\_B2B\_START to the WR network. This timing frame will be received by the B2B source SCU and the B2B target SCU. The B2B source and target SCUs start the B2B process at a designated time (represented as the pink dot in Fig. 4.9). The timestamp of the start is an integer multiple of 10  $\mu$ s, the period of the T0 incident. They need maximum 1  $\mu$ s to inform the PAP modules to start the phase advance extrapolation respectively. The PAP modules needs approximately 500  $\mu$ s for the phase extrapolation and updates the extrapol-

<sup>1</sup>[https://en.wikipedia.org/wiki/Master/slave\\_\(technology\)](https://en.wikipedia.org/wiki/Master/slave_(technology))

### 4.3. Realization

lated phase value every T0 incident. After 500  $\mu$ s, the B2B source and target SCUs need another maximum 1  $\mu$ s to receive the extrapolated phase  $\psi_0^X$  (represented as the red diamond in Fig. 4.9) from the PAP modules, as well as the slope of the phase deviation  $k^X$ . They also timestamp the T0 incidents  $t_\psi^X$  which corresponds to the extrapolated phase. The B2B source SCU obtains  $\psi_0^{src}$ ,  $t_\psi^{src}$  and  $k^{src}$  at the source synchrotron and the B2B target SCU obtains  $\psi_0^{trg}$ ,  $t_\psi^{trg}$  and  $k^{trg}$  at the target synchrotron. In fact,  $t_\psi^{src} = t_\psi^{trg}$ .

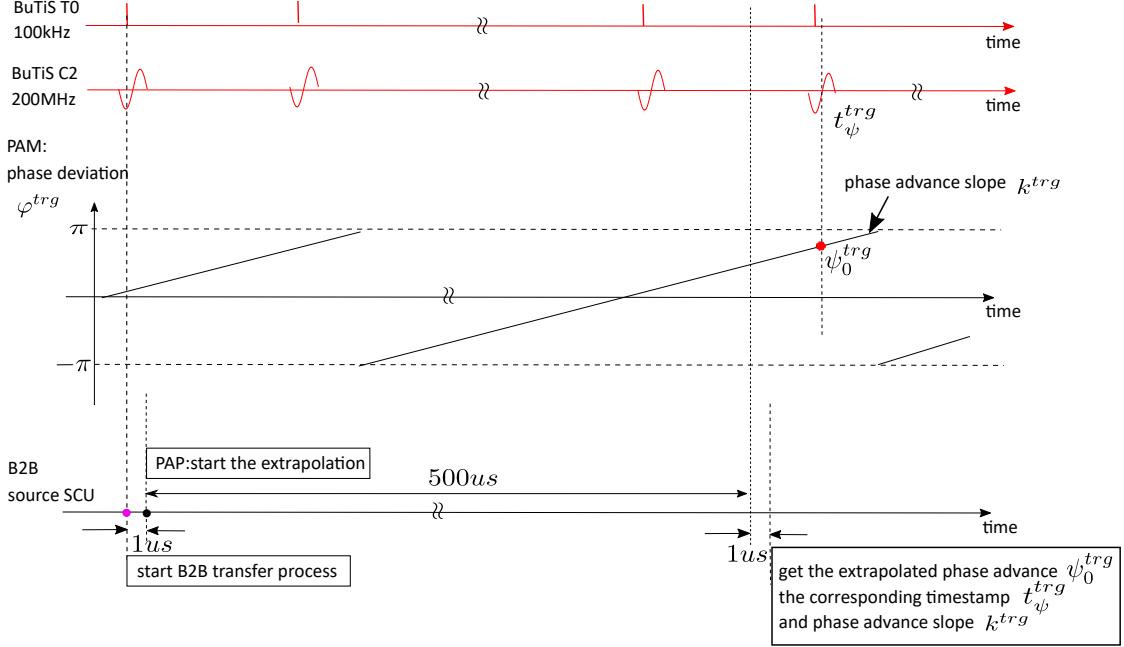


Figure 4.9: The synchronization of the extrapolated phase to the timestamp in one synchrotron

Because the phase deviation of the phase measurement signal complies with the linear relation with time, the evolution of the phase deviation between the phase measurement signal and the synchronization reference signal can be calculated for any T0 incidents, see eq. 4.15, which will be used for the phase correction of the bucket indication signal in sec. 4.3.5.

$$\varphi^X(t_\psi^X + nT_{sample\_PAP}) = [(\psi_0^X + k^X \cdot nT_{sample\_PAP}) \bmod 2\pi] - \pi \quad (4.15)$$

#### 4.3.2 Exchange of Measured Data

For the B2B transfer, there is a “B2B transfer master”, which is responsible for the data collection of two ring accelerators, the data calculation, the data redistribution and the B2B transfer status check. The data of the source and target synchrotron must be transferred to the B2B transfer master via the deterministic WR network in the format of the timing frame.

For the simplicity, the B2B source SCU works as the B2B transfer master, so the extrapolated phase  $\psi_0^{trg}$ , the corresponding timestamp  $t_\psi^{trg}$  and the phase deviation slope  $k^{trg}$  are transferred by the B2B target SCU to the B2B source SCU via the WR network. The transfer of the data is achieved by the timing frame `TGM_PHASE_TIME`.

### 4.3. Realization

The B2B transfer involves a certain amount of timing frames. For more details about the B2B timing frames, please see Appendix A. The timing frames are not sent via the DM in order to reduce the traffic of the WR network and reduce the timing frame transfer delay on the WR network [?], so a specified VLAN, B2B VLAN, is defined for the B2B timing frames. All SCUs for the B2B transfer are assigned to the B2B VLAN. Fig. 4.10 illustrates an example of the transfer path of the B2B timing frames in the WR network. The frames are transferred along the path with orange color instead of the path with blue color. The test for the transfer delay of the B2B timing frames on the WR network is explained in Chap. 5.

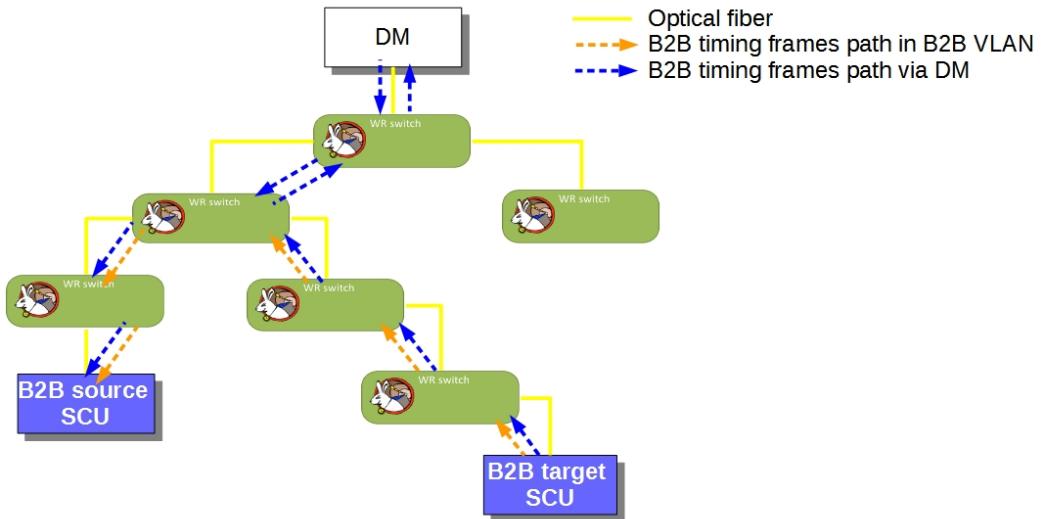


Figure 4.10: One example of the transfer path of the B2B timing frames in the WR network

#### 4.3.3 Rf Synchronization

The FAIR B2B transfer system is available for both the phase shift and frequency beating methods, see Sec. 2.3. The rf synchronization of two ring accelerators is based on the phase difference between two synchronization frequencies of the two rf systems at time  $t_\psi^X$ , which is denoted as  $\Delta\phi_{syn\_0}$ .  $\Delta\phi_{syn\_0}$  is calculated from the measurement of the phase difference between the phase measurement signals of the two rf systems.

$$\Delta\phi_{syn\_0} = \begin{cases} (\psi_0^{trg} - \psi_0^{src}) \bmod 2\pi & f_{bucket} = f_{syn}^{trg} \\ \frac{h_{syn}^{trg}}{h_{rev}^{trg}}(\psi_0^{trg} - \psi_0^{src}) \bmod 2\pi & f_{bucket} = f_{rev}^{trg} \end{cases} \quad (4.16)$$

$\Delta\phi_{syn\_0}$  is within the range between 0 and  $2\pi$ . The SM provides the goal time difference between the synchronization frequencies of the two rf systems  $t_{diff\_sync}$ , which considers the delay compensation for TOF, all propagation and the extra phase shift. The goal phase difference between two synchronization frequencies is denoted as  $\Delta\phi_{goal}$  and calculated as

$$\Delta\phi_{goal} = t_{diff\_sync} \cdot f_{syn}^{trg} \cdot 2\pi \quad (4.17)$$

## 4.3. Realization

---

The B2B source SCU calculates the required phase adjustment (denoted as  $\Delta\phi_{adjust}$ ) for the synchronization frequency based on  $\Delta\phi_{goal}$  and  $\Delta\phi_{syn\_0}$ , see eq. 4.18. It is within the range between 0 and  $2\pi$ .

$$\Delta\phi_{adjust} = (\Delta\phi_{syn\_0} - \Delta\phi_{goal}) \bmod 2\pi \quad (4.18)$$

### 4.3.3.1 Rf Synchronization with Phase Shift Method

For the rf synchronization, the maximum required phase shift of the synchronization frequency is  $2\pi$ . In order to accomplish the phase alignment as fast as possible, the phase shift will be conducted backward or forward. Therefore a phase shift of up to  $\pm\pi$  will be considered for the Group DDS with regard to the synchronization frequency  $f_{syn}^X$ . The rf frequency modulation achieves the phase shift of  $\Delta\phi_{shift}$ .

$$\Delta\phi_{shift} = \begin{cases} \Delta\phi_{adjust} & 0 < \Delta\phi_{adjust} \leq \pi \\ \Delta\phi_{adjust} - 2\pi & \pi < \Delta\phi_{adjust} \leq 2\pi \end{cases} \quad (4.19)$$

The required phase shift is implemented to the Group DDS with the revolution frequency, so the required phase shift on the revolution frequency (denoted as  $\Delta\phi_{shift\_imp}$ ) is

$$\Delta\phi_{shift\_imp} = \frac{h_{rev}^{trg}}{h_{syn}^{trg}} \Delta\phi_{shift} \quad (4.20)$$

A normalized frequency modulation profile  $f_{normalized}$  for  $\pi$  can be precalculated, which guarantees the adiabaticity. The actual frequency modulation profile  $f_{actual}$  is decided by  $f_{normalized}$  and  $\Delta\phi_{shift}$ , see eq. 4.21.

$$f_{actual}(t) = \frac{\Delta\phi_{shift}}{\pi} f_{normalized}(t) \quad (4.21)$$

Fig. 4.11 shows an example of a normalized and several actual frequency modulation profiles and the corresponding phase shift profiles. The magenta profile is the normalized profile  $f_{normalized}$  with the phase shift of  $\pi$ . The blue one is  $1/2f_{normalized}$  with the phase shift of  $\pi/2$  and the green one is  $1/3f_{normalized}$  with  $\pi/3$ .

Fig. 4.12 shows the integration of the Phase Shift Module (PSM) into the B2B source SCU. The B2B source SCU sends the required phase shift to the PSM, which controls the phase shift of the phase measurement signal of Group DDS by means of either the frequency modulation (Fig. 4.11 (a)) or the phase modulation (Fig. 4.11 (b)). The required phase shift is distributed by the LLRF system to all the Group DDS of the synchrotron. The Group DDS signals are routed to different cavity systems by a Switch Matrix to realize the phase shift of all cavities on the synchrotron. For more details about the implementation and realization of the PSM module, please see “Development of the LLRF system for a deterministic Bunch-to-Bucket transfer for FAIR“ [? ].

A particular case of the B2B synchronization occurs, when the target synchrotron is empty, i.e. it does not capture any bunch yet, the phase shift can be done for the target synchrotron without adiabatical consideration (e.g. the phase jump is possible). In this case, the B2B source SCU sends the timing frame `TGM_PHASE_JUMP` to the B2B target SCU, which contains the required phase shift. After the B2B target SCU receives the timing frame, it sends the value to the PSM for the phase jump of the Group DDS with the synchronization frequency of the target synchrotron.

### 4.3. Realization

---

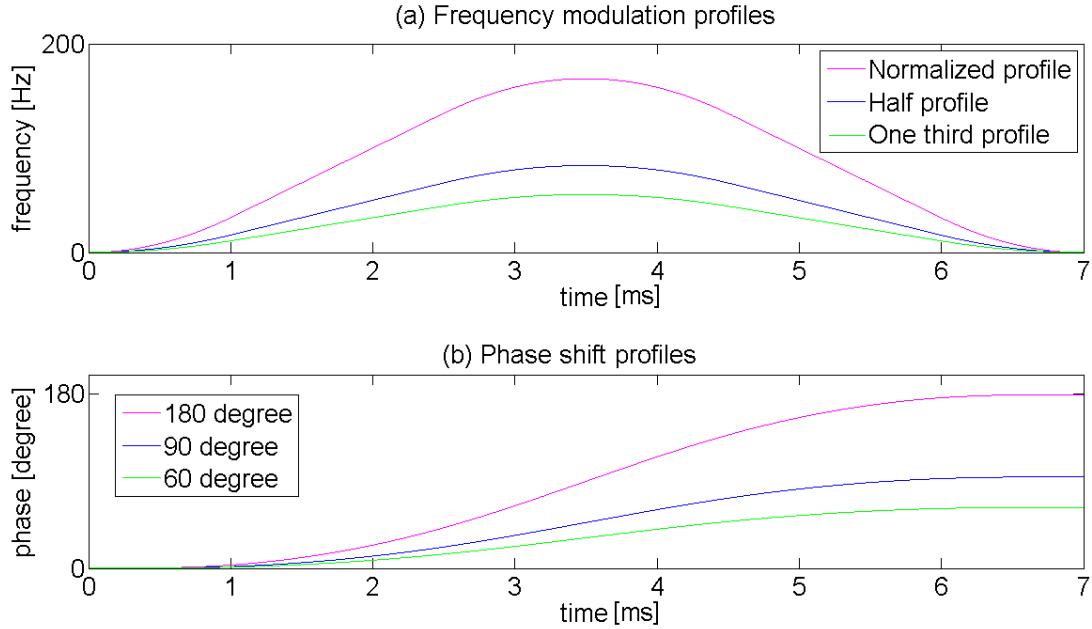


Figure 4.11: The normalized frequency and phase modulation profile and the actual profiles

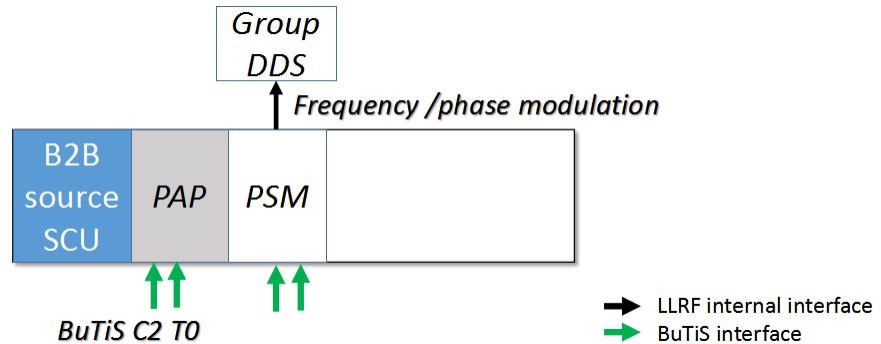


Figure 4.12: Integration of the Phase Shift Module into the B2B source SCU

#### 4.3.3.2 Rf Synchronization with Frequency Beating Method

With the frequency beating method, the phase difference varies at the rate of the synchronization frequency difference between the two rf systems. The frequency beating method can achieve only positive phase adjustment, namely from 0 to  $2\pi$ , so two rf systems are synchronized when the phase difference between two synchronization frequencies equals to  $\Delta\phi_{adjust}$ , namely

$$\Delta\phi_{syn} = \Delta\phi_{adjust} \quad (4.22)$$

The correct phase alignment is achieved by the proper waiting time  $T_{wait}$ .

$$T_{wait} = \frac{\Delta\phi_{adjust}}{2\pi} \cdot \frac{1}{|f_{syn}^{src} - f_{syn}^{trg}|} + n \cdot \frac{1}{|f_{syn}^{src} - f_{syn}^{trg}|} \quad (4.23)$$

The circumference ratio between many pair of machines in FAIR is not an integer, the synchronization frequencies of two ring accelerators begin beating automatically. For the pairs with an integral circumference ratio, the synchronization frequency of

### 4.3. Realization

the source synchrotron has to be detuned. The Group DDS produces the detuned phase measurement signal provided by the SM.

#### 4.3.4 Coarse Synchronization

The coarse synchronization is achieved by the synchronization window with a certain length. Within this window, bunches are transferred into buckets with the center mismatch smaller than the upper bound. The length of the synchronization window  $T_w$  is one period of the bucket indication signal. For the phase shift method, the bunch-to-bucket injection center mismatch within the synchronization window is 0. For the frequency beating method, the maximum bunch-to-bucket injection center mismatch  $\sigma_{rf}$  within the synchronization window is calculated by eq. 4.24. For more details, please see Sec. 2.3.2.

$$\sigma_{rf} = \pm \frac{1}{2} \cdot 2\pi |f_{syn}^{src} - f_{syn}^{trg}| \cdot T_w \cdot \frac{h_{rf}^{trg}}{h_{syn}^{trg}} \quad (4.24)$$

The B2B source SCU obtains the delay compensation for the TOF, all propagation delays, the kicker preparation time and the bucket delay (denoted as  $t_{delay}$ ) from the SM. It calculates the start of the synchronization window (denoted as  $t_w$ ), taking the delay compensation into consideration.

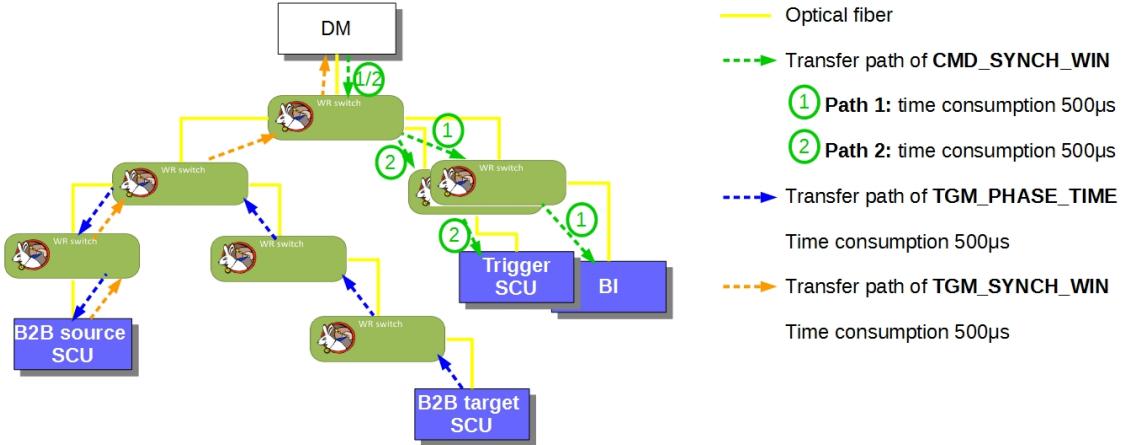


Figure 4.13: The transfer delay of the start of the synchronization window on the WR network.

Fig. 4.13 shows the transfer delay of the start of the synchronization window on the WR network. The timestamp of the start of the synchronization window  $t_w$  is first of all transferred from the B2B source SCU to the DM (the orange transfer path) by the timing frame TGM\_SYNCH\_WIN. Then  $t_w$  is repackaged by the DM into a new timing frame CMD\_SYNCH\_WIN and CMD\_SYNCH\_WIN is transferred from the DM to the source and target Trigger SCUs (the green transfer path with ②), as well as the BI (the green transfer path with ①) for the indication of the beam. The Trigger SCUs are used to produce the kicker trigger signals. The start of the synchronization window must be late enough to guarantee that the BI receives CMD\_SYNCH\_WIN and is activated before the start of the synchronization window. The start of the synchronization window must be at least 1.6 ms later than  $t_\psi^X$ .

### 4.3. Realization

---

The time duration of 1.6 ms is the sum of the 500  $\mu\text{s}$  upper bound transfer delay of TGM\_PHASE\_TIME (the blue transfer path), that of TGM\_SYNCH\_WIN (the orange transfer path), that of CMD\_SYNCH\_WIN (the green transfer path) on the WR network and 100  $\mu\text{s}$  calculation time of the B2B source SCU. For more details of the time constraints, please see Chap. 5.

For the phase shift method, the rf frequency modulation has a fixed duration  $T$ . The start of the synchronization window for the phase shift method is calculated as

$$t_w = t_\psi^X + 500 \mu\text{s} + 100 \mu\text{s} + T - t_{delay} \quad (4.25)$$

where 500  $\mu\text{s}$  is the upper bound transfer delay of TGM\_PHASE\_TIME on the WR network (the blue transfer path) and 100  $\mu\text{s}$  the calculation time of the B2B source SCU.  $T$  must long enough to guarantee the activation of the BI timely, namely

$$500 \mu\text{s} + 100 \mu\text{s} + T - t_{delay} > 1.6 \text{ ms} \quad (4.26)$$

where  $T$  is generally longer than 5 ms, which is long enough to meet the time requirement of the BI.

The start of the synchronization window for the frequency beating method is calculated as

$$t_w = t_\psi^X + T_{wait} - \frac{T_w}{2} - t_{delay} \quad (4.27)$$

where the second term of  $T_{wait}$ ,  $n \cdot \frac{1}{|f_{syn}^{src} - f_{syn}^{trg}|}$ , is used to guarantee the activation of the BI timely.  $n$  is calculated by the following relation.

$$\frac{\Delta\phi_{adjust}}{2\pi} \cdot \frac{1}{|f_{syn}^{src} - f_{syn}^{trg}|} + n \cdot \frac{1}{|f_{syn}^{src} - f_{syn}^{trg}|} - \frac{T_w}{2} - t_{delay} > 1.6 \text{ ms} \quad (4.28)$$

#### 4.3.5 Bucket Label

The bucket label is realized based on the bucket indication signal for the first bucket plus a fixed delay for the indication of the correct buckets to be filled.

The evolution of the phase deviation between the phase measurement signal and the synchronization reference signal of the target synchrotron is calculated for any T0 incidents (same as eq. 4.15).

$$\varphi^{trg}(t_\psi^{trg} + nT_{sample\_PAP}) = [(\psi_0^{trg} + k^{trg} \cdot nT_{sample\_PAP}) \bmod 2\pi] - \pi \quad (4.29)$$

where  $\psi_0^{trg}$  is the phase advance extrapolated by the PAP module at  $t_\psi^{trg}$  of the target synchrotron.

Therefore, the bucket indication signal can be corrected exactly in phase with the phase measurement signal of the target synchrotron by  $\varphi^{trg}(t_\psi^{trg} + nT_{sample\_PAP})$  at the T0 incidents. The bucket indication signal is exactly a copy of the revolution frequency or the synchronization frequency of the target synchrotron, so it is also called the "reproduced signal". The bucket indication signal can be reproduced campus-wide. A specific bucket is just a certain number of the cavity rf periods of the target synchrotron delay based on the bucket indication signal.

The FAIR B2B transfer system needs the bucket indication not only at the rf flattop, but also during the whole acceleration cycle. The bucket indication at the rf flattop is used for the normal extraction and injection and the bucket indication

### 4.3. Realization

---

during the whole acceleration cycle is used for the emergency dump. For the SIS100 emergency kick, the reproduced signal has always the same frequency and is always in phase with the SIS100 revolution signal, so it is called the "real-time reproduced signal". The bunch gap label is realized based on the real-time reproduced signal for the first bucket plus a variable delay for the indication of the bunch gap.

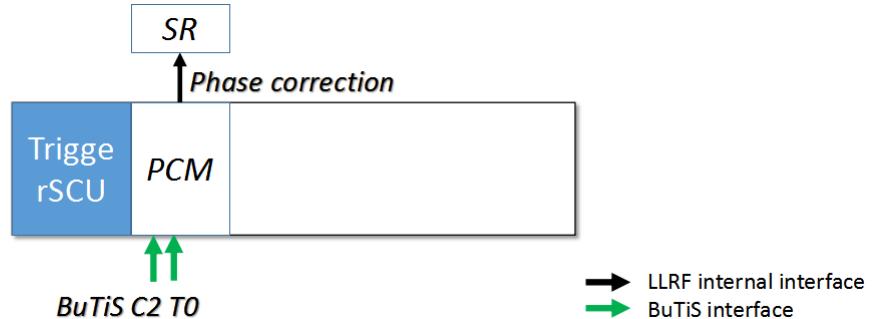


Figure 4.14: Integration of the Phase Correction Module into the Trigger SCU

The bucket label is realized by the Trigger SCU, the Signal Reproduction (SR) module and the Phase Correction Module (PCM), see Fig. 4.14. The reproduced signal is produced by SR module. The Trigger SCU is responsible for the receipt of the phase correction value from the B2B source SCU and the transfer of this value to the PCM. The PCM module is used to correct the phase of the reproduced signal. The PCM module is a SCU slave in the Trigger SCU. The SR module produces the bucket indication signal marker in the format of the TTL signal, whose rising edges are aligned with the positive zero-crossings of the rf signal of the revolution frequency or the synchronization frequency. For more details about the implementation and realization of the PCM and the SR module, please see "Development of the LLRF system for a deterministic Bunch-to-Bucket transfer for FAIR" [? ].

#### 4.3.6 Bucket Label for the normal Extraction and Injection

For the bucket label for the normal extraction and injection, three steps are necessary. Fig. 4.15 shows these three steps for the reproduction of the bucket label. Here the B2B transfer from the SIS18 to the SIS100 is taken as an example.

- Step 1. Frequency correction

The SR module produces the "reproduced signal" with the frequency  $f_{bucket}$ . The positive zero-crossing of the reproduced signal always indicates the start of the 1<sup>st</sup> bucket.

- Step 2. Phase correction

The reproduced signal must do the phase correction at a specified T0 incident. The phase correction value and the phase correction timestamp are calculated by the B2B source SCU. The phase correction value is transferred by the timing frame **TGM\_PHASE\_CORRECTION** to the Trigger SCU. The timestamp of the phase correction is embodied in the execution time of **TGM\_PHASE\_CORRECTION** at the Trigger SCU, when the phase correction value is given by the Trigger SCU to the SR module via the PCM.

### 4.3. Realization

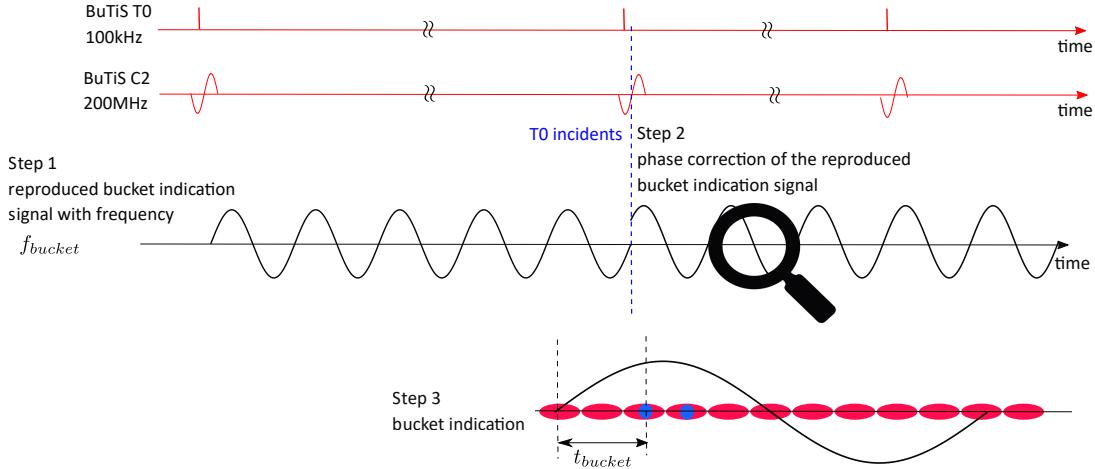


Figure 4.15: The realization of the bucket label for the normal extraction and injection.

- Step 3. Bucket indication

The SM considers the bucket delay  $t_{bucket}$  within the kicker delay compensation, see Sec. 4.1.2. In Fig. 4.15, the reproduced signal is with the SIS100 revolution frequency and the 3<sup>rd</sup> and 4<sup>th</sup> buckets of ten buckets will be filled with  $t_{bucket} = 1 \cdot T_{rev}^{SIS18}$ .

#### 4.3.7 Bunch Gap Label for Emergency Extraction

Only for the SIS100 emergency procedure, the bunch gap label is important during the whole acceleration cycle. There are two steps for the realization of the bunch gap label, see Fig. 4.16.

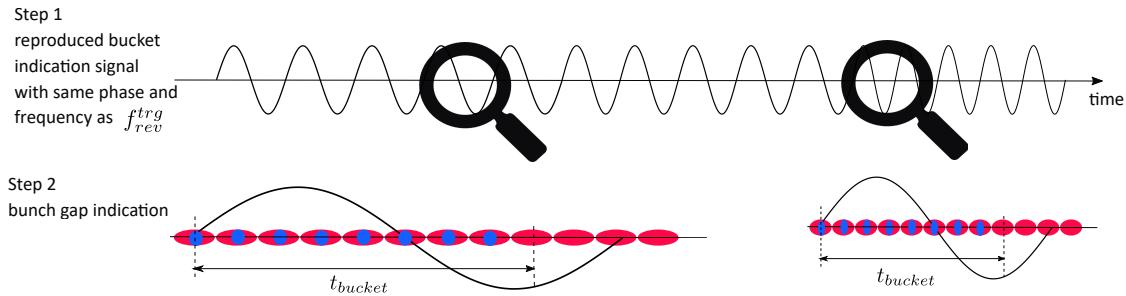


Figure 4.16: The realization of the bunch gap for the emergency extraction.

- Step 1. Reproduced signal synchronized with the phase measurement signal of the revolution frequency

The real-time reproduced signal is directly distributed from the switch matrix, which synchronizes with the revolution frequency in frequency and phase.

- Step 2. Bunch gap indication

The SM considers the bunch gap  $t_{bucket}$  within the kicker delay compensation. In Fig. 4.16, the real-time reproduced signal is with the SIS100 revolution

### 4.3. Realization

---

frequency and the 9<sup>th</sup> and 10<sup>th</sup> buckets of ten buckets are taken as an example as the bunch gap. The  $t_{bucket} = 4 \cdot T_{rev}^{SIS18}$ .

#### 4.3.8 Fine Synchronization of Extraction and Injection Kickers

After the synchronization of the rf systems between two ring accelerators, the TOF, all propagation and kicker preparation delays are compensated. Now, the extraction and injection kickers must be fired at the calculated trigger time within the bunch gap before the specific bunch or bucket passes the kickers.

This is the task of the Trigger Decision (TD) module in the Trigger SCU. The TD receives the synchronization window in the form of an enable signal. The fine synchronization will be accomplished by the marker of the reproduced signal plus the extraction or injection kicker delay compensation from the SM. This achieves the fine synchronization of the B2B transfer. The TD transmits the kicker pulse directly to the kicker electronic.

In case of fatal errors, the emergency kicker must kick the beam immediately but within the bunch gap into the emergency dump.

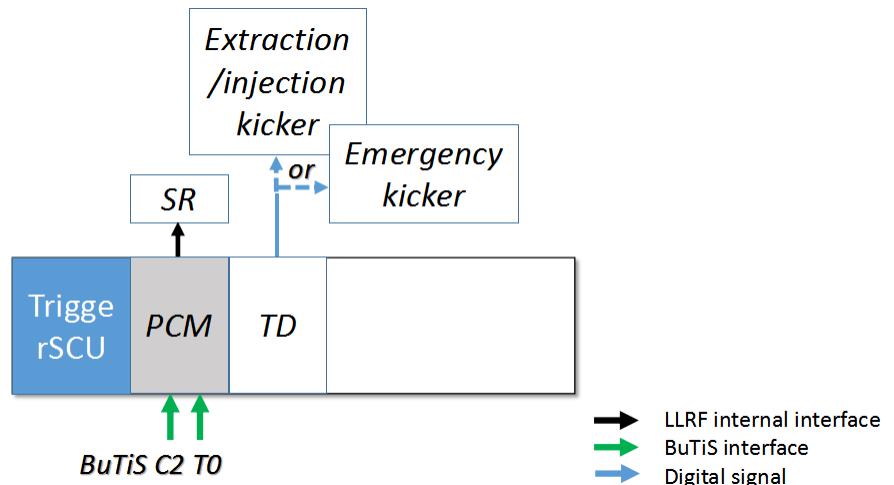


Figure 4.17: Integration of the Trigger Decision module into the Trigger SCU

Fig. 4.17 shows the integration of the Trigger Decision (TD) module into the Trigger SCU.

The kicker trigger is realized based on the first rising edge of the bucket indication signal marker within the synchronization window plus the kicker delay compensation. For the normal B2B extraction/injection, the synchronization window is received by the source and target Trigger SCUs from the WR network by CMD\_SYNCH\_WIN. The extraction kick delay compensation is  $T_{rev}^{SIS100} + T_{rev}^{SIS18} - (t_{TOF} + t_{v.inj} + t_{ext})$  and the injection kicker delay compensation is  $T_{rev}^{SIS100} + T_{rev}^{SIS18} - (t_{v.inj} + t_{inj})$  in the example in Fig. 4.1, when the bucket indication signal has the frequency of  $f_{rev}^{trg}$ .

For FAIR use cases, there is always only one bucket in the target synchrotron when  $f_{bucket} = f_{syn}^{trg}$ . In this case, the bucket delay is not taken into consideration. The extraction kick delay compensation is  $T_{syn}^{trg} - (t_{TOF} + t_{v.inj} + t_{ext})$  and the injection kicker delay compensation is  $T_{syn}^{trg} - (t_{v.inj} + t_{inj})$ , see Fig. 4.18.

## 4.3. Realization

---

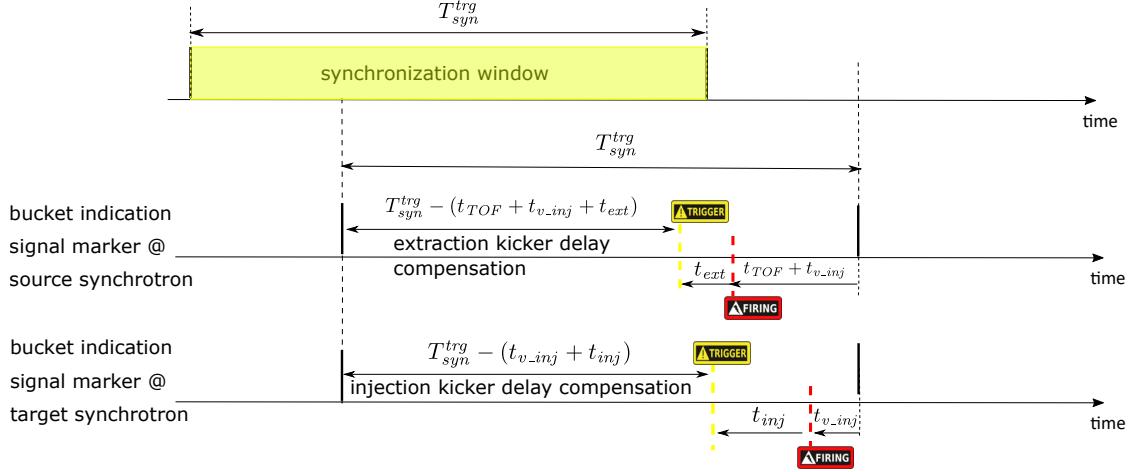


Figure 4.18: The illustration of the kicker delay compensation when the bucket indication signal has the frequency of  $f_{syn}^{trg}$ .

Both extraction and injection kick delay compensation values are preloaded from the SM to the Trigger SCU and the Trigger SCU gives these values to the TD module. When the beam injection inhibit signal from the MPS is on, the TD module will block the extraction/injection trigger.

For the SIS100 emergency kick, the extraction delay compensation is calculated by  $T_{rev}^{SIS100} + t_{bucket} - (t_{v\_emg} + t_{emg})$ , where  $t_{v\_emg}$  is the time delay between the virtual rf cavity and the emergency extraction position,  $t_{emg}$  the emergency kicker delay and  $t_{bucket}$  always indicates the bunch gap. The emergency extraction delay compensation values are preloaded from the SM to the Trigger SCU and the Trigger SCU gives these values to the TD module. The kicker delay compensation is applied to the real-time reproduced signal by TD module. Only when the emergency dump signal from MPS is valid, the emergency kicker will be triggered by the TD module.

### 4.3.9 B2B Transfer Status Check

The B2B transfer status must be known by the DM. The B2B source SCU, the B2B transfer master, is responsible for the status check. The B2B source SCU receives the trigger time of the extraction kicker and actual beam extraction time, `TGM_KICKER_TRIGGER_TIME_S`, from the source Trigger SCU via the WR network and also the trigger time of the injection kicker and actual beam injection time, `TGM_KICKER_TRIGGER_TIME_T`, from the target Trigger SCU via the WR network. The actual beam extraction time is the beginning of the kicker flat-top of the last extraction kicker magnet and the actual beam injection time is the beginning of the kicker flat-top of the first injection kicker magnet. The Trigger SCU is responsible for the collection of the kicker trigger time and the beam extraction/injection time. The B2B source SCU examines the status of the B2B transfer system and transfers the status and the actual beam injection time, `TGM_B2B_STATUS`, to the DM. If all components of the B2B transfer system have worked correctly, the B2B transfer process is successful. Otherwise it has failed.

The source and target Kicker SCUs individually get the timestamp of the beginning of the magnetic flattop of the last extraction kicker unit and the first injection kicker unit and transfer these information

### 4.4 Data Flow

In this section, the procedure for the B2B transfer is explained from the perspective of the data flow, which follows the basic six steps in Fig. 4.4. Fig. 4.19 shows the data flow in the source and target synchrotrons and between two ring accelerators. The rectangle with the different color represents the basic six steps. The left part in each rectangle presents the data flow in the source synchrotron and the right part the data flow in the target synchrotron.

1. The DM sends the timing frame `CMD_START_B2B` to the B2B source and target SCUs for the start of the B2B transfer via the WR network. Besides, it requests the switch-off of the feedback loop.
2. After receiving `CMD_START_B2B`, the B2B source and target SCUs start the PAM module to measure the phase deviation  $\varphi^X$  with the help of the PAP module locally and the PAP module extrapolates the phase advance into the future. After a period of time, the B2B source and target SCUs read the extrapolated phase advance  $\psi_0^X$  and the slope of the phase deviation  $k^X$  from the PAP module locally, timestamping the  $\psi_0^X$ .
3. The B2B target SCU sends the extrapolated phase  $\psi_0^{trg}$ , the corresponding timestamp  $t_\psi^{trg}$  and the slope  $k^{trg}$  in the format of the timing frame `TGM_PHASE_TIME` to the B2B source SCU in the B2B VLAN.
4. When the B2B source SCU receives the timing frame `TGM_PHASE_TIME`, it calculates the synchronization window and transfers the timestamp of the start of the window to the DM in the format of the timing frame `TGM_SYNCH_WIN`. Then the DM transfers the start of the window to the Trigger SCUs at the source and target synchrotrons by `CMD_SYNCH_WIN`. The B2B source SCU calculates the phase correction value and transfers it to all Trigger SCUs via the WR network in the format of the timing frame `TGM_PHASE_CORRECTION`. Then the Trigger SCUs transfer the phase correction value to its PCM. The PCM starts the phase correction of the SR module.

Only for the phase shift method, the B2B source SCU calculates the required phase shift  $\Delta\phi_{shift}$  and transfers it to the PSM. Then the PSM transfers the phase or frequency modulation profile to the Group DDS.

5. When the source and target Trigger SCUs receive the timing frame `CMD_SYNCH_WIN`, they produce the synchronization window pulse for the TD module. With the help of the reproduced signal from the SR module, the kicker delay compensation from the Trigger SCU and the indication signals (the emergency dump signal and the beam injection inhibit signal) from the MPS, the TD module produces the normal extraction/injection trigger signals or the emergency kick trigger for the kicker.
6. The extraction and injection kickers or emergency kicker are fired. After that, the source Trigger SCU gets the actual beam extraction time and the timestamp of the extraction trigger signal from the TD module and transfers them to the B2B source SCU in the format of the timing frame `TGM_KICKER_TRIGGER_TIME_S`. The target Trigger SCU gets the timestamp of actual beam injection time

## 4.5. Comparison between FAIR B2B Transfer System and current B2B Transfer

and the timestamp of the injection trigger signal from the TD module and transfers them to the B2B source SCU in the format of the timing frame TGM\_KICKER\_TRIGGER\_TIME\_T. Then the B2B source SCU checks the B2B transfer status and transfers the status together with the beam injection time to the DM in the format of the timing frame TGM\_B2B\_STAUS (represented as the red line in the rectangle of step 6 in Fig. 4.19).

## 4.5 Comparison between FAIR B2B Transfer System and current B2B Transfer

The existing GSI control system realizes the B2B transfer from the SIS18 to the ESR. It is an event based system, that event execution will start immediately at the event receipt. Events are directly sent from a “timing master”, who makes the schedule. Each accelerator has its own timing master, e.g. the ESR is equipped with the ESR-timing master and the SIS18 with the SIS-timing master [? ? ].

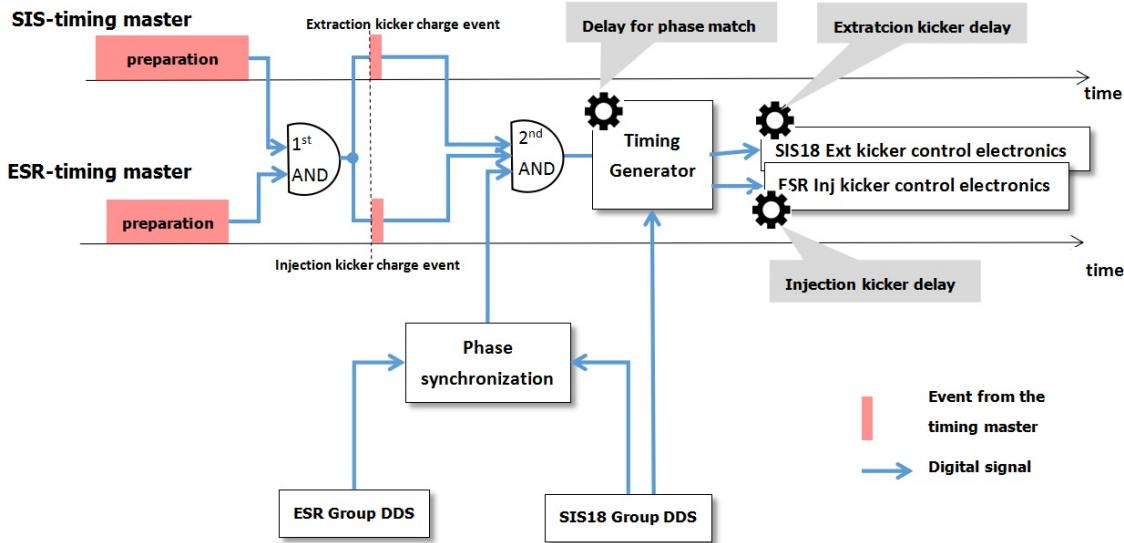


Figure 4.20: The current realization of the bunch-to-bucket transfer between the SIS18 and the ESR with the GSI control system.

*Gear sign represents the configuration from operators.*

Fig. 4.20 illustrates the current realization of the B2B transfer from the SIS18 to the ESR with the GSI control system. The SIS18 needs longer time for the preparation, e.g. the beam injection and the beam acceleration, before the extraction than that of the ESR before the injection, so the ESR is earlier fully prepared for the transfer. When the SIS18 is fully prepared with bunches to be transferred, the ready signal from the ESR-timing master and the SIS-timing master are forwarded into the first logic *AND* gate. When both the SIS18 and the ESR are prepared, namely the output of the first logic *AND* gate is high, the extraction kicker charge event is sent from the SIS-timing master and the injection kicker charge event from the ESR-timing master. The energy storage module of kicker will be charged by the high voltage power supply, see Chap. 2. When the energy storage module

## 4.5. Comparison between FAIR B2B Transfer System and current B2B Transfer

---

of two kickers are fully charged, the ready signal of the extraction and injection kickers from the ESR-timing master and the SIS-timing master are forwarded into the second logic *AND* gate, as well as the “phase synchronization signal“ from the rf system. The phase synchronization signal indicates the alignment of the zero-crossing of the cavity rf frequencies from Group DDS of the SIS18 and the ESR, which is a “coarse synchronization“. The output of the second *AND* gate is an indication signal, starting the delay compensation of the time-of-flight, the bunch gap and all propagation delays on the SIS18 cavity rf signal for the correct phase matching between the SIS18 and ESR rf systems, denoted as “delay for phase matching“ in Fig. 4.20. The delay compensation based on the SIS18 cavity rf signal is the process of a “fine synchronization“. The GSI control system realizes the B2B transfer from the SIS18 to the ESR with an acceptable bunch-to-bucket injection center mismatch.

The ESR uses the injection orbit instead of the design orbit, so the circumference ratio between the SIS18 and the ESR is close to an integer,  $C^{SIS18}/C^{ESR} = 2 - 0.003$ , the SIS18 has four bunches,  $h^{SIS18} = 4$  and ESR has two buckets,  $h^{ESR} = 2$ , so  $f_{rf}^{SIS18}/f_{rf}^{ESR} = 4/(4 - 0.006)$ . The phase difference between rf systems of the SIS18 and the ESR varies at the speed of the beating frequency  $\Delta f = |f_{rf}^{SIS18} - f_{rf}^{ESR}| = 1898$  Hz, see Appendix. D.2. The required phase adjustment  $\Delta\phi_{adjust}$  happens  $T_{wait}$  after the indication signal, see eq. 4.30.

$$T_{wait} = \frac{\Delta\phi_{adjust}}{2\pi} \cdot \frac{1}{\Delta f} + n \frac{1}{\Delta f} \quad (4.30)$$

When the delay for the required phase difference is expired, trigger pulses are produced by the timing generator for both the SIS18 extraction and ESR injection kicker control electronics. Every kicker control electronics adds a separate delay to trigger pulses, denoted as “extraction kicker delay“ and “injection kicker delay“ in Fig. 4.20. The delay for the required phase matching, extraction kicker delay and injection kicker delay are configurable by operators. The precision of the ignition signal from the kicker control electronics is 1 ns.

The existing B2B transfer with the GSI control system only supports the B2B transfer with the frequency beating method. It dose not support B2B transfer with the phase shift method. It gets the phase difference between the two rf systems of the SIS18 and the ESR via the direct phase comparison by the phase synchronization module. Parameters (e.g. the delay for the required phase matching, the extraction kicker delay and the injection kicker delay) must be properly configured and adjusted by operators. Besides, it does not support buckets filling by multiple batches, e.g. eight out of ten SIS100 buckets are filled by four SIS18 batches, each of them has two bunches.

Compared with the current B2B transfer with the GSI control system, the FAIR B2B transfer system has many advantages. It supports both the phase shift and frequency beating methods. The FAIR B2B transfer system is based on the GMT system, which is a time based system. All FECs of the GMT system are time synchronized with nano second accuracy, which achieves the bunch-to-bucket transfer with the acceptable bunch-to-bucket injection center mismatch. Besides, the FAIR B2B transfer system is more flexible. It supports several B2B transfers running at the same time, e.g. the B2B transfer from the SIS18 to the SIS100 and B2B transfer from the ESR to the CRYRING. It is capable to transfer different species

#### **4.5. Comparison between FAIR B2B Transfer System and current B2B Transfer**

---

beam from one machine cycle to another without the operator's configuration. It is capable to transfer the beam between two ring accelerators via a FRS, Pbar or Super FRS. It can achieve various complex bucket pattern. What is more, the FAIR B2B transfer system coordinates with the MPS system, which protects synchrotrons from unacceptable failure or situation.

## 4.5. Comparison between FAIR B2B Transfer System and current B2B Transfer

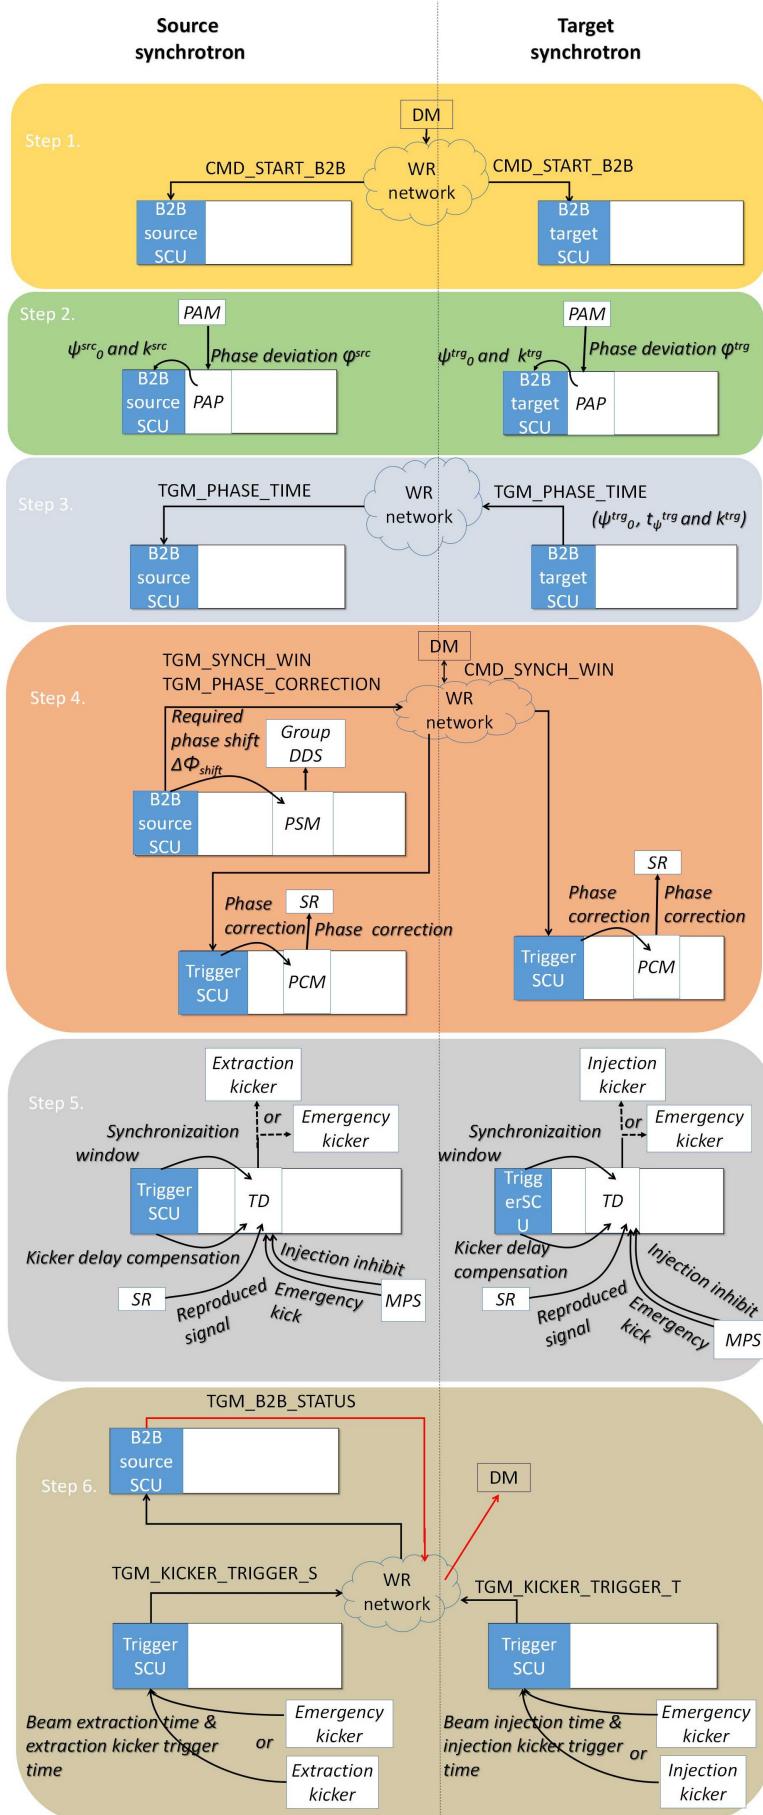


Figure 4.19: The data flow of the B2B transfer system

# Chapter 5

## Realization and systematic Investigation of FAIR B2B Transfer System

This chapter concentrates on the realization and systematic investigation of the B2B transfer system. In Sec. 5.1, both the phase shift and frequency beating synchronization methods are analyzed from the beam dynamic perspective. The WR network is investigated for the B2B transfer and the calculation of the synchronization window are presented in Sec. 5.2. The B2B transfer system for FAIR focuses first of all on the transfer from the SIS18 to the SIS100, so the trigger possibility of the SIS18 extraction and SIS100 injection kicker are systematically investigated in Sec. 5.3. Besides, the test setup from the timing aspect is introduced and the test result is analyzed in Sec. 5.4.

### 5.1 Beam Dynamic Analysis of two Synchronization Methods for B2B Transfer from SIS18 to SIS100

This section analyzes the phase shift and frequency beating methods from the beam-dynamics perspective for the synchronization of the SIS18 with the SIS100. Because the most stringent requirement are from the boundary ion species, the beam dynamics of the  $H^+$  and  $U^{28+}$  beams are analyzed.

The dispersion function, a lattice parameter, defines the local sensitivity of the beam trajectory to a relative energy error [? ]. For the rf frequency modulation of the phase shift method, the dispersion function is reflected in the relative momentum shift. The maximum tolerable relative momentum shift is decided by the semi-aperture required for the beam and the dispersion function. The maximum tolerable relative momentum of the  $H^+$  beam and that of the  $U^{28+}$  beam of the SIS18 are the same by coincident,  $\Delta p/p_{max} = \pm 0.008$ , which is given by machine physicists. For the frequency beating method ( $\Delta p/p = 0$ ), the dispersion function is reflected in the relative bending magnetic field shift instead of the relative momentum shift. The maximum tolerable relative bending magnetic field shift is decided by the semi-aperture required for the beam and the dispersion function. The maximum tolerable relative bending magnetic field shift of the  $H^+$  beam and that of the  $U^{28+}$  beam of

## 5.1. Beam Dynamic Analysis of two Synchronization Methods for B2B Transfer from SIS18 to SIS100

---

the SIS18 are minus of their maximum tolerant relative momentum shift, namely  $\Delta B/B_{max} = -\Delta p/p_{max} = \pm 0.008$ . The constraint on the displacement of the orbit length  $\Delta L/L_{max}$  is obtained by the product  $\alpha_p \Delta p/p_{max}$  or  $-\alpha_p \Delta B/B_{max}$ . The reasonable bucket size of a running bucket is larger than 80% of that of a stationary bucket, namely  $\alpha_b(\phi_s) \geq 80\%$ . Due to the constraint of the bucket size, the synchronous phase must be within the range between  $-6.4^\circ$  and  $+6.4^\circ$ .

The acceptable range of the parameters accompanying with the frequency adjustment of the phase shift method for the SIS18  $H^+$  and  $U^{28+}$  beams are summarized in Tab. 5.1 and that accompanying with the frequency adjustment of the frequency beating method are summarized in Tab. 5.2.

Table 5.1: Acceptable range of the parameters accompanying with the frequency adjustment of the phase shift method for the SIS18  $H^+$  and  $U^{28+}$  beams

$\Delta p/p_{max}$	$\Delta L/L_{max}$	$\alpha_b(\phi_s)_{min}$	$\phi_{s\_max}$
$\pm 0.008$	$H^+ \pm 0.8 \cdot 10^{-4}$ $U^{28+} \pm 2.4 \cdot 10^{-4}$	80%	$\pm 6.4^\circ$

Table 5.2: Acceptable range of the parameters accompanying with the frequency adjustment of the frequency beating method for the SIS18  $H^+$  and  $U^{28+}$  beams

$\Delta B/B_{max}$	$\Delta L/L_{max}$	$\alpha_b(\phi_s)_{min}$	$\phi_{s\_max}$
$\pm 0.008$	$H^+ \pm 0.8 \cdot 10^{-4}$ $U^{28+} \pm 2.4 \cdot 10^{-4}$	80%	$\pm 6.4^\circ$

### 5.1.1 Beam Dynamics of Phase Shift Method for $U^{28+}$

The obtained phase shift  $\Delta\phi$  is determined by the rf frequency modulation  $\Delta f_{rf}$  and the duration of the frequency modulation  $T$  (same as eq. 2.22).

$$\Delta\phi = 2\pi \int_{t_0}^{t_0+T} \Delta f_{rf}(t) dt \quad (5.1)$$

In order to make the rf frequency modulation effective, the beam feedback loops on the rf system are switched off before the B2B starts. Sec. 2.3.1 shows that there are several criterion for the rf frequency modulation for the longitudinal emittance to be preserved.

- There exists a maximum rf frequency offset  $\Delta f_{rf\_max}$ , which comes from the constraint of  $\Delta p/p_{max}$  in Tab. 5.1.
- $\frac{d\Delta f_{rf}}{dt}$  must be continuous and small enough, which comes from the constraint of  $\alpha_b(\phi_s)_{min}$  in Tab. 5.1.
- $\frac{d^2\Delta f_{rf}}{dt^2}$  must be small enough.

## 5.1. Beam Dynamic Analysis of two Synchronization Methods for B2B Transfer from SIS18 to SIS100

---

According to these criterion, some rf frequency modulations are obviously ruled out of consideration. e.g. a trapezoid modulation and a triangular modulation, whose first derivatives are not continuous. The following three examples of rf frequency modulation are analyzed, which comply with the above mentioned criterion. The case (1) is a sinusoidal modulation, the case (2) is a parabolic modulation, which consists of three parabolas and two lines between every two parabolas, and the case (3) is also a parabolic modulation, including three parabolas. The phase shift is assumed to be achieved within 7 ms, namely  $T = 7$  ms. Three rf frequency modulation cases are shown in Fig. 5.1. All three cases give the same phase shift,  $\Delta\phi = \pi$ , which is proved by substituting each form of  $\Delta f_{rf}(t)$  into eq. 5.1 and performing integration.

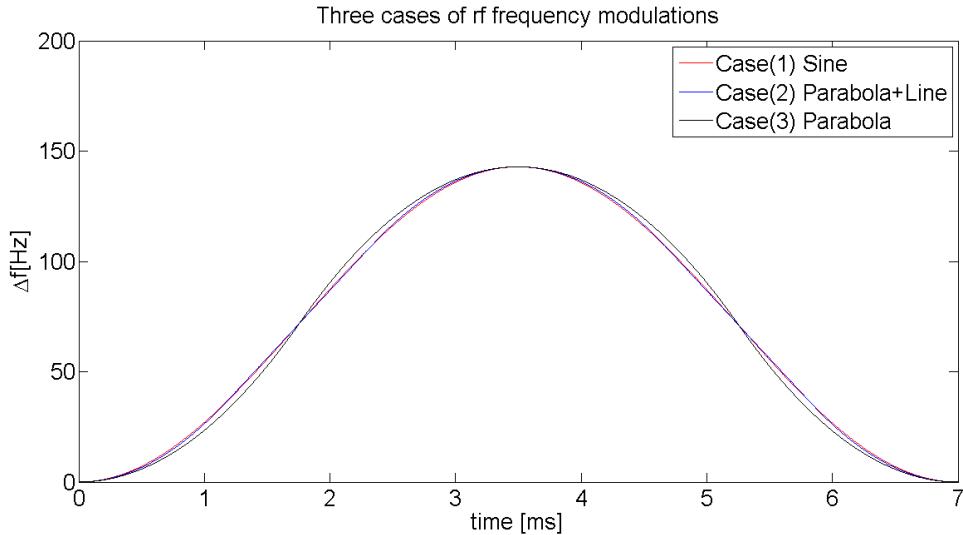


Figure 5.1: Examples of rf frequency modulation.

Case (1)

$$\Delta f_{rf}(t) = \frac{1}{2T} [1 - \cos(\frac{2\pi}{T}(t - t_0))] \quad t_0 + 0 < t \leq t_0 + T \quad (5.2)$$

Case (2)

$$\Delta f_{rf}(t) = \begin{cases} \frac{9}{T^3}(t - t_0)^2 & t_0 + 0 < t \leq t_0 + \frac{T}{6} \\ \frac{1}{4T} + \frac{3}{T^2}(t - t_0 - \frac{T}{6}) & t_0 + \frac{T}{6} < t \leq t_0 + \frac{2T}{6} \\ \frac{1}{T} - \frac{9}{T^3}(t - t_0 - \frac{T}{2})^2 & t_0 + \frac{2T}{6} < t \leq t_0 + \frac{4T}{6} \\ \frac{3}{4T} - \frac{3}{T^2}(t - t_0 - \frac{4T}{6}) & t_0 + \frac{4T}{6} < t \leq t_0 + \frac{5T}{6} \\ \frac{9}{T^3}(t - t_0 - T)^2 & t_0 + \frac{5T}{6} < t \leq t_0 + T \end{cases} \quad (5.3)$$

Case (3)

$$\Delta f_{rf}(t) = \begin{cases} \frac{8}{T^3}(t - t_0)^2 & t_0 + 0 < t \leq t_0 + \frac{T}{4} \\ \frac{1}{T} - \frac{8}{T^3}[(t - t_0) - \frac{T}{2}]^2 & t_0 + \frac{T}{4} < t \leq t_0 + \frac{3T}{4} \\ \frac{8}{T^3}[T - (t - t_0)]^2 & t_0 + \frac{3T}{4} < t \leq t_0 + T \end{cases} \quad (5.4)$$

### 5.1. Beam Dynamic Analysis of two Synchronization Methods for B2B Transfer from SIS18 to SIS100

---

Fig. 5.2 and Fig. 5.3 show the first and second derivative of three rf frequency modulations.

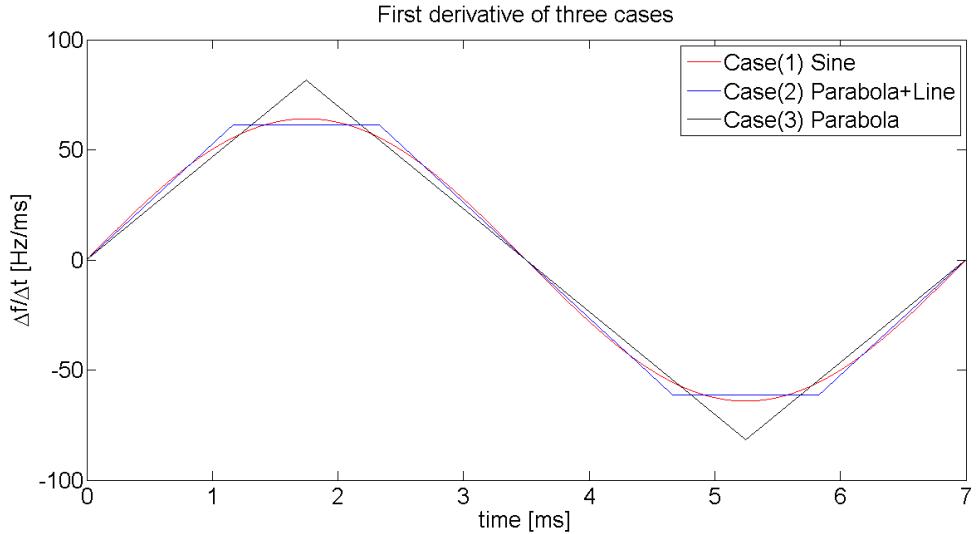


Figure 5.2: First derivative of three cases.

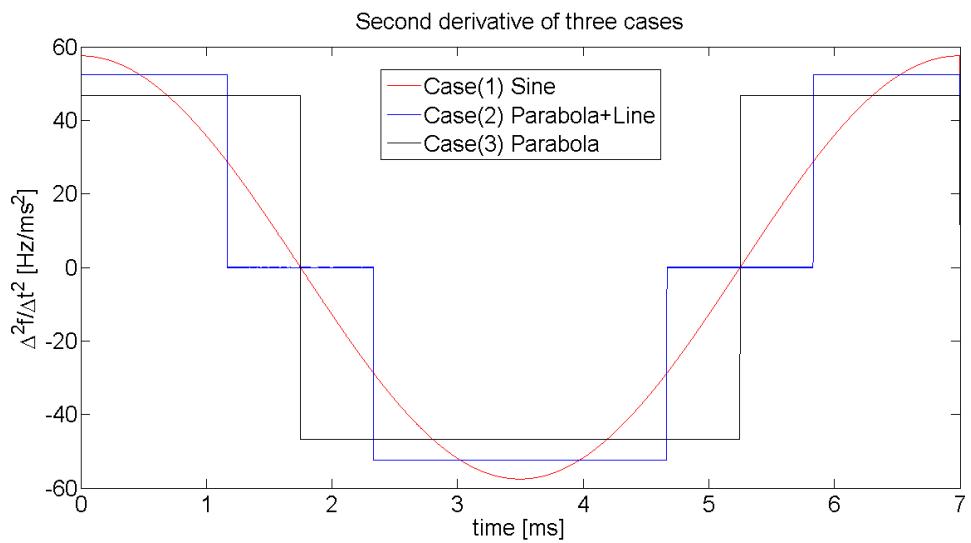


Figure 5.3: Second derivative of three cases.

---

Fig. 5.4 shows the corresponding phase shift modulation of three cases.

## 5.1. Beam Dynamic Analysis of two Synchronization Methods for B2B Transfer from SIS18 to SIS100

---

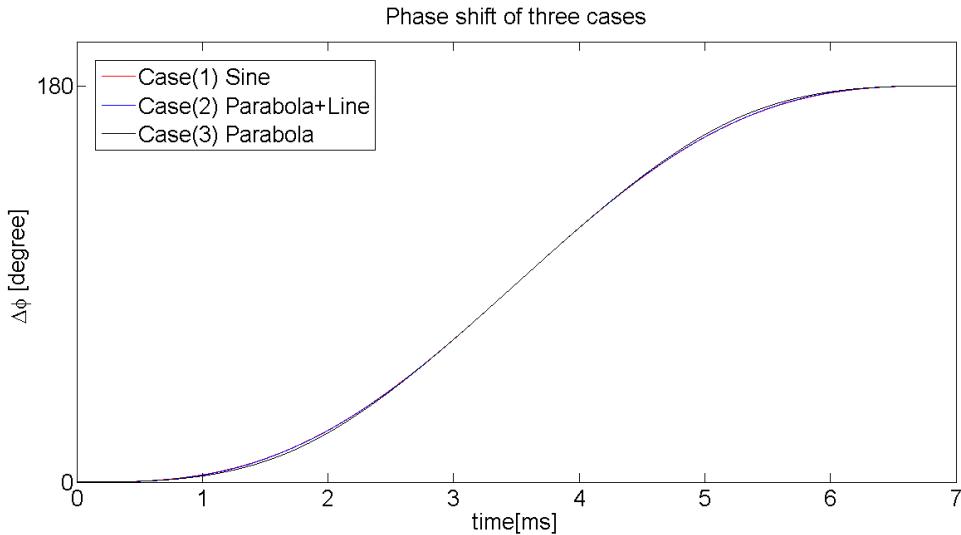


Figure 5.4: The phase shift modulation of three cases.

### 5.1.1.1 Longitudinal Dynamic Analysis for Frequency Modulation

In this section, the average radial excursion, the relative momentum shift, the synchronous phase, the bucket size and the adiabaticity of three rf frequency modulations are analyzed.

- Orbit length displacement

The orbit length displacement is calculated for the three cases by eq. (2.54). Fig. 5.5 shows the calculation result [? ].

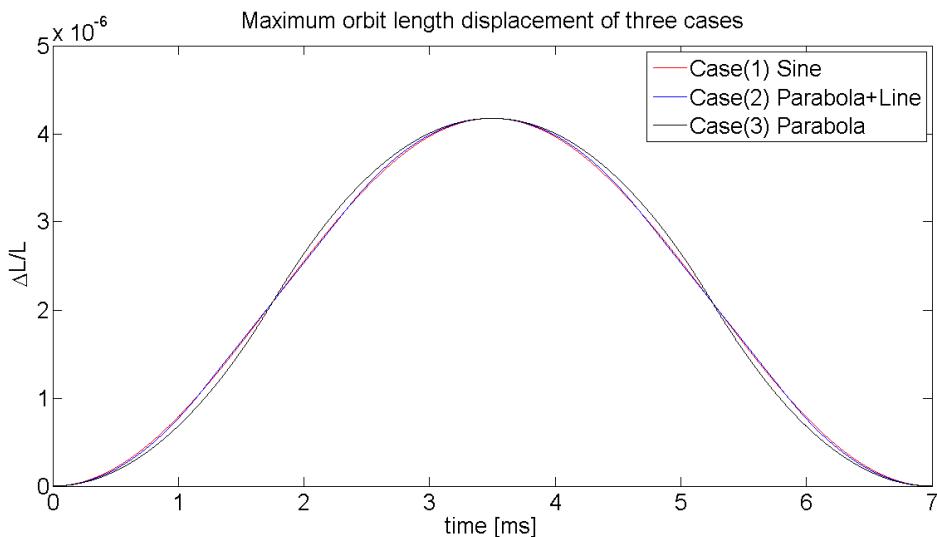


Figure 5.5: Maximum orbit length displacement of three cases.

### 5.1. Beam Dynamic Analysis of two Synchronization Methods for B2B Transfer from SIS18 to SIS100

Table 5.3: The maximum orbit length displacement of three cases

	Case (1)	Case (2)	Case (3)
Maximum orbit length displacement	$4.18 \cdot 10^{-6}$	$4.18 \cdot 10^{-6}$	$4.18 \cdot 10^{-6}$

As shown in Tab. 5.3 the maximum orbit length displacement is  $4.18 \cdot 10^{-6}$  for all three cases, which is within the acceptable range in Tab. 5.1. Hence, all cases are applicable.

- Relative momentum shift

The relative momentum shift is calculated for three cases by eq. 2.53. Fig. 5.6 shows the calculation result.

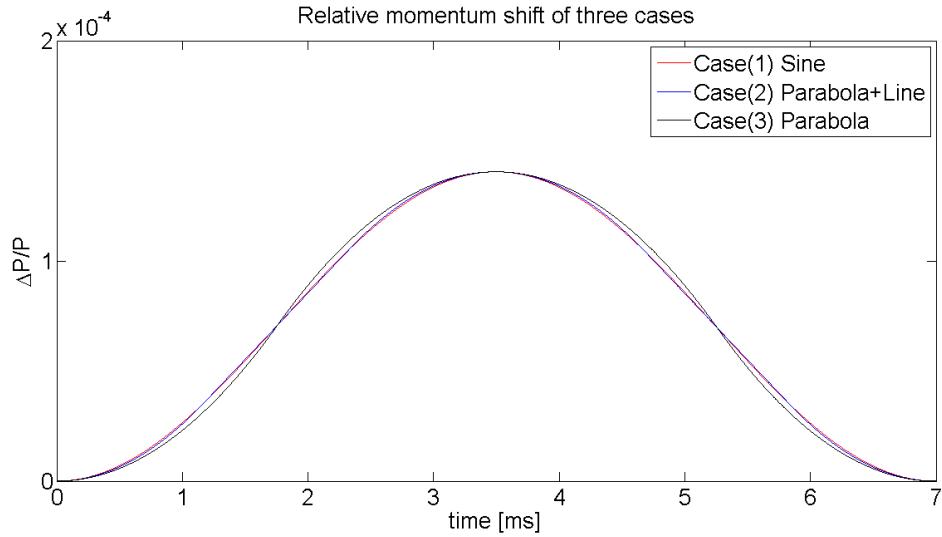


Figure 5.6: Relative momentum shift of three cases.

Table 5.4: The maximum relative momentum shift of three cases

	Case (1)	Case (2)	Case (3)
Maximum relative momentum shift	$1.40 \cdot 10^{-4}$	$1.40 \cdot 10^{-4}$	$1.40 \cdot 10^{-4}$

As shown in Tab. 5.4 the maximum relative momentum shift is  $1.40 \cdot 10^{-4}$  for all three cases, which is within the acceptable range in Tab. 5.1. Hence, all cases are applicable.

- Synchronous phase

The rf frequency modulations make the synchronous phase deviate from the nominal value 0. Fig. 5.7 shows the changes in the synchronous phase  $\phi_s(t)$ . It is calculated by substituting values into eq. 2.56. For three cases, the synchronous phase  $\Delta\phi_s(t)$  during the modulations are continuous without any

## 5.1. Beam Dynamic Analysis of two Synchronization Methods for B2B Transfer from SIS18 to SIS100

---

phase jumps and smaller than  $\pm 6^\circ$ , which is determined by the bucket size. Hence, all cases are applicable.

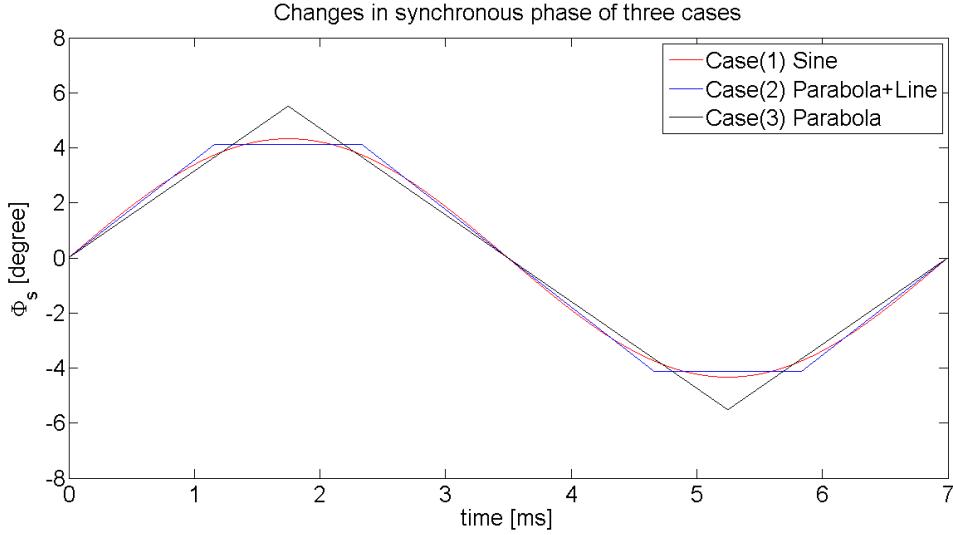


Figure 5.7: Changes in synchronous phase of three cases.

- Bucket size

The bucket area factor  $\alpha_b$  varies during rf frequency modulations. Before the modulations, the synchronous phase  $\phi_s=0$  and  $\alpha_b(0^\circ) = 1$ . By substituting the changes in synchronous phase into eq. 2.59, we get the ratio of bucket areas of a running bucket to the stationary bucket for three cases, see Fig. 5.8.

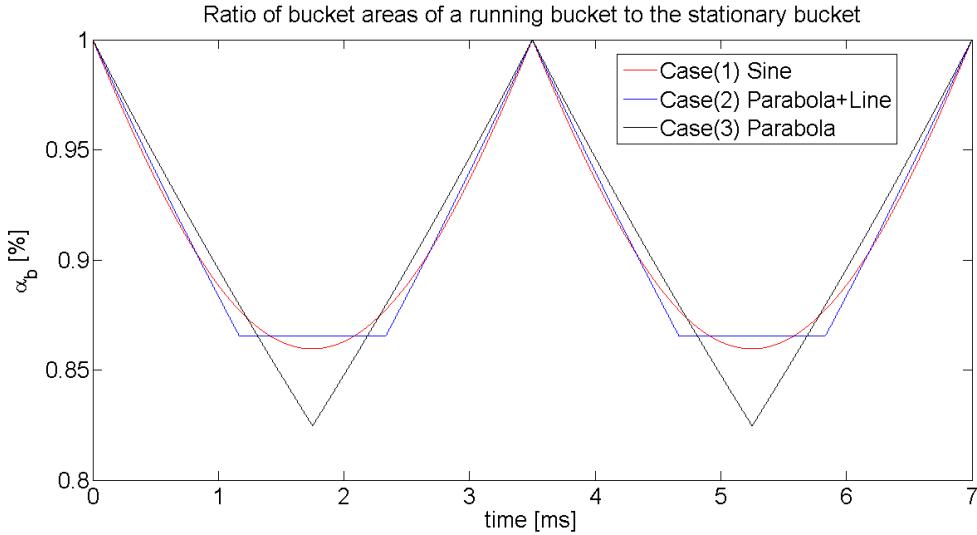


Figure 5.8: Ratio of bucket areas of a running bucket to the stationary bucket of three cases.

Tab. 5.5 shows the minimum bucket area factor for three cases. For case (1) and (2), the bucket area factor is larger than 86%, which is larger than that of the case (3). Hence, case (1) and (2) are preferred compared with the case (3).

## 5.1. Beam Dynamic Analysis of two Synchronization Methods for B2B Transfer from SIS18 to SIS100

---

Table 5.5: The minimum bucket area factor of three cases

	Case (1)	Case (2)	Case (3)
Minimum bucket area factor	86.0%	86.5%	82.5%

- Adiabaticity

By substituting the values of  $\phi_s(t)$ ,  $\dot{\phi}_s(t)$  and  $\omega_s$  into eq. 2.63, we get the adiabaticity parameter  $\varepsilon$  for three cases, see Fig. 5.9.

Tab. 5.6 shows the maximum adiabaticity parameter for three cases. For case (1), the maximum of  $\varepsilon$  is 0.000030. For case (2), the maximum of  $\varepsilon$  occurs at  $1/6T$ ,  $2/6T$ ,  $4/6T$  and  $5/6T$ , when the change rate of the synchronous phase  $\dot{\phi}_s(t)$  has a maximum, shown in Fig. 5.7. For case (3), the maximum of  $\varepsilon$  occurs at  $1/4T$  and  $3/4T$ , when the change rate of the synchronous phase  $\dot{\phi}_s(t)$  has a maximum. For all three cases, the adiabaticity parameter has the order of magnitude  $10^{-4}$ . The calculation of the criteria of the adiabaticity is beyond the scope of this dissertation.

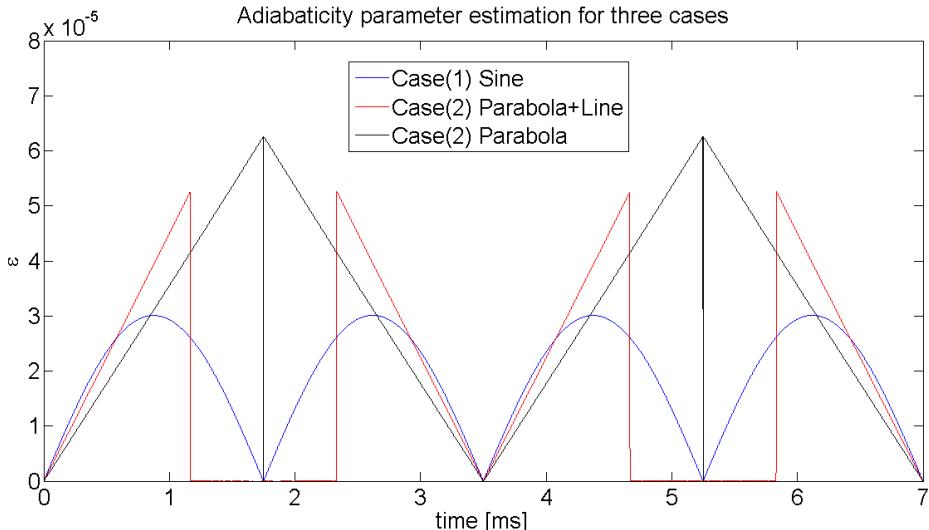


Figure 5.9: Adiabaticity parameter of three cases.

Table 5.6: The maximum adiabaticity of three cases

	Case (1)	Case (2)	Case (3)
Maximum adiabaticity	$5.3 \cdot 10^{-5}$	$5.9 \cdot 10^{-5}$	$6.3 \cdot 10^{-5}$

### 5.1.1.2 Transverse Dynamics Analysis

For the SIS18, the chromaticities  $Q_x^c$  and  $Q_y^c$  for  $U^{28+}$  operation are  $-6.5$  and  $-4.1$ . Substituting the chromaticity and the maximum momentum shift (see. Tab. 5.4)

## 5.1. Beam Dynamic Analysis of two Synchronization Methods for B2B Transfer from SIS18 to SIS100

---

into eq. 2.64, the chromatic tune shifts  $\Delta Q_x$  and  $\Delta Q_y$  during rf modulations for three cases can be calculated. Because case (1), case (2) and case (3) have the same maximum relative momentum shift, the chromatic tune shifts are same for the three rf frequency modulations.

$$\Delta Q_x = -6.5 \cdot 1.40 \cdot 10^{-4} = -9.1 \cdot 10^{-4} \quad (5.5)$$

$$\Delta Q_y = -4.1 \cdot 1.40 \cdot 10^{-4} = -5.74 \cdot 10^{-4} \quad (5.6)$$

The chromatic tune shift for three cases are negligibly small.

In a word, although all three cases meet the requirement of the parameters accompanying with the frequency adjustment, the case (1) of a sinusoidal modulation is the best one for the beam performance because of the smaller adiabaticity.

### 5.1.2 Beam Dynamics of Frequency Beating Method for $U^{28+}$

In the case of the frequency beating method, we guarantee the extraction and injection energy always match, which means that the momentum is not affected by the frequency detuning, namely  $\Delta p = 0$ . Hence, the frequency detuning has influence only on the longitudinal dynamics.

#### 5.1.2.1 Longitudinal Dynamics Analysis

For the frequency beating method, the rf frequency detuning is done during the SIS18 rf ramp or at the rf flattop. Due to the SIS18  $U^{28+}$  lattice and the semi-aperture required for the beam, the SIS18  $U^{28+}$  accepted bending magnetic field shift is [?]

$$\frac{\Delta B}{B} = -\frac{1}{\alpha_p} \frac{\Delta L}{L} = \pm 8 \cdot 10^{-3} \quad (5.7)$$

From eq. 2.68, the tolerable rf frequency change for  $U^{28+}$  at the extraction energy 200 MeV/u is

$$\frac{\Delta f_{rf}}{f_{rf}} = \pm 2.4 \cdot 10^{-4} \quad (5.8)$$

where the maximum rf frequency detuning approximates to 377 Hz for the cavity rf frequency of 1.57 MHz of  $U^{28+}$ .

### 5.1.3 Beam Dynamics of Phase Shift Method for $H^+$

For the frequency adjustment of the SIS18 for the  $U^{28+}$  beam, we know that the sinusoidal modulation is best for the beam stability. Now we will check whether the sinusoidal modulation is also applicable for the  $H^+$  beam of the SIS18.

#### 5.1.3.1 Longitudinal Dynamics Analysis

When the case (1), a sinusoidal modulation (same as the eq. 5.2) with  $T = 7$  ms, is used as the frequency modulation for the phase shift of  $\pi$ , we have the following parameters accompanying the modulation, see Tab. 5.7.

## 5.1. Beam Dynamic Analysis of two Synchronization Methods for B2B Transfer from SIS18 to SIS100

---

Case (1)

$$\Delta f_{rf}(t) = \frac{1}{2T} [1 - \cos(\frac{2\pi}{T}(t - t_0))] \quad t_0 + 0 < t \leq t_0 + T \quad (5.9)$$

Table 5.7: Parameters accompanying with a 7 ms sinusoidal modulation for the SIS18  $H^+$  beam

Maximum orbit length displacement	Relative moment shift	Synchronous phase	Bucket size	Adiabaticity
$< 4.09 \cdot 10^{-5}$	$< 0.0041$	$\pm 34.7^\circ$	$> 27\%$	$< 0.04$

Compared with the acceptable range of the parameters in Tab. 5.1, the synchronous phase, the bucket size and the adiabaticity accompanying with the 7 ms sinusoidal modulation are far beyond the acceptable range. Hence, a sinusoidal modulation with longer period must be used to guarantee these requirement. A sinusoidal modulation with  $T = 20$  ms is used as the frequency modulation for the phase shift of  $\pi$ , we have the following parameters accompanying the modulation, see Tab. 5.8. In this case, all parameters meet the requirement.

Table 5.8: Parameters accompanying with a 20 ms sinusoidal modulation for the SIS18  $H^+$  beam

Maximum orbit length displacement	Relative moment shift	Synchronous phase	Bucket size	Adiabaticity
$< 3.9 \cdot 10^{-6}$	$< 3.9 \cdot 10^{-4}$	$\pm 4.2^\circ$	$> 86\%$	$< 1.9 \cdot 10^{-4}$

For the frequency modulation of the SIS18  $H^+$  beam, a longer period sinusoidal modulation (e.g. 20 ms) must be used for the beam performance consideration.

### 5.1.3.2 Transverse Dynamics Analysis

For the SIS18, the chromaticity  $Q'_x$  and  $Q'_y$  of  $H^+$  is  $-7.5$  and  $-4.4$ . Substituting the chromaticity and the maximum momentum shift (see. Tab. 5.8) into eq. 2.64. The maximum chromatic tune shift  $\Delta Q_x$  and  $\Delta Q_y$  during the 20 ms sinusoidal modulation can be calculated.

$$\Delta Q_x = -7.5 \cdot 3.9 \cdot 10^{-4} = -2.925 \cdot 10^{-3} \quad (5.10)$$

$$\Delta Q_y = -4.4 \cdot 3.9 \cdot 10^{-4} = -1.716 \cdot 10^{-3} \quad (5.11)$$

The chromatic tune shift to the tune for three cases are negligible small.

## 5.2. GMT systematic Investigation

---

### 5.1.4 Beam Dynamics of Frequency Beating Method for $H^+$

The frequency detuning has influence only on the longitudinal dynamics because of  $\Delta p = 0$  during the frequency detuning process.

#### 5.1.4.1 Longitudinal Dynamics Analysis

Due to the SIS18  $H^+$  lattice and the semi-aperture required for the beam,, the SIS18  $H^+$  accepted bending magnetic field shift is

$$\frac{\Delta B}{B} = -\frac{1}{\alpha_p} \frac{\Delta L}{L} = \pm 8 \cdot 10^{-3} \quad (5.12)$$

From eq. 2.68, the tolerable rf frequency change for  $H^+$  at the extraction energy 4 GeV/u is

$$\frac{\Delta f_{rf}}{f_{rf}} = \pm 0.8 \cdot 10^{-4} \quad (5.13)$$

where the maximum rf frequency detuning approximates to 109 Hz for the cavity rf frequency of 1.36 MHz of  $H^+$ .

## 5.2 GMT systematic Investigation

The B2B transfer system makes use of certain aspects of the GMT system to implement the data collection, merging and redistribution. The main task of the data merging is to calculate the start of the synchronization window, which is used for the selection of the bucket indication signal for the kicker trigger. The data collection and redistribution make use of the WR network, so the test and measurement of the WR network for the B2B transfer is important.

### 5.2.1 Calculation of the Start of the Synchronization Window

All calculations for the B2B transfer are based on the phase deviation measurement by the PAM module. With the help of the phase extrapolation by the PAP module and the timestamp for the extrapolated phase by the B2B source and target SCUs, the fine time point of the correct phase alignment between two synchronization frequencies is calculated, see Chap. 4. This fine time point is called the “best estimate of alignment” and denoted by  $t_{align}$ . There exists *uncertainty* for any measurement, which is defined as a non-negative parameter characterizing the dispersion of the values attributed to a measured quantity. The measurement uncertainty [?] of the phase deviation is reflected in the uncertainty of the extrapolated phase for the calculation of the phase alignment. Because of the propagation of the uncertainty of the extrapolated phase and that of the timestamp, the phase alignment lies between  $t_{align} - \delta t_{align}$  and  $t_{align} + \delta t_{align}$ , where  $\delta t_{align}$  is the uncertainty of the phase alignment.  $[t_{align} - \delta t_{align}, t_{align} + \delta t_{align}]$  is called the “probable range of alignment”. In order to achieve the highly precise bunch-to-bucket injection, the length of the probable range of alignment must be shorter than the length of the synchronization window. In Sec. 5.2.1.1, the calculation and inspection of  $\delta t_{align}$  for the phase shift and frequency beating methods are explained. For the correct selection of the

## 5.2. GMT systematic Investigation

---

same rising edge of the bucket indication signal within the synchronization window at different SCUs, the start of the synchronization window must be properly calculated. In Sec. 5.2.1.2, the calculation of the start of the synchronization window is explained. In Sec. 5.2.1.3, the requirement of the accuracy of the start of the synchronization window is calculated.

### 5.2.1.1 Uncertainty of Phase Alignment

In Chap. 4, we get the phase difference  $\Delta\phi_{syn\_0}$  between two synchronization frequencies at  $t_\psi^X$  (see eq. 4.16).

$$\Delta\phi_{syn\_0} = \begin{cases} \psi_0^{trg} - \psi_0^{src}, & f_{bucket} = f_{syn}^{trg} \\ \frac{h_{syn}^{trg}}{h_{rev}^{trg}}(\psi_0^{trg} - \psi_0^{src}) \bmod 2\pi, & f_{bucket} = f_{rev}^{trg} \end{cases} \quad (5.14)$$

The longer the time is used for the phase extrapolation, the smaller the uncertainty of the extrapolated phase will be. When the PAP module uses 500  $\mu$ s for the phase extrapolation, the uncertainty of the extrapolated phase is 100 ps in the time domain [?]. The uncertainty of the extrapolated phase from the time domain to the phase domain (denoted as  $\delta\psi_0^X$ ) is calculated by eq. 5.15.

$$\delta\psi_0^X = 100\text{ps} \cdot f_{B2B}^{trg} \cdot 2\pi \quad (5.15)$$

Both the B2B source SCU and the B2B target SCU measure the timestamp  $t_\psi^X$  for the extrapolated phase and the uncertainty of the measured timestamp (denoted as  $\delta t_\psi^X$ ) is 1 ns.

$$\delta t_\psi^X = 1\text{ ns} \quad (5.16)$$

- Phase shift method

For the phase shift method, the duration of the rf frequency modulation is  $T$ , so the best estimate of phase alignment is expressed by eq. 5.17 (derived from eq. 4.25)

$$t_{align} = t_\psi^X + 600\text{ us} + T \quad (5.17)$$

The uncertainty of the phase alignment is only caused by the uncertainty of the timestamp, calculated by eq. 5.18.

$$\delta t_{align} = \sqrt{\left(\frac{\partial t_{align}}{\partial t_\psi^X} \delta t_\psi^X\right)^2} = \delta t_\psi^X = 1\text{ ns} \quad (5.18)$$

For all FAIR B2B transfer use cases with the phase shift method, the uncertainty of the phase alignment is 1 ns, which is much smaller than  $T_w$  and is acceptable.

- Frequency beating method

The best estimate of alignment is determined by the required phase difference  $\Delta\phi_{shift}$  and calculated by eq. 5.19 (derived from eq. 4.27).

$$t_{align} = t_\psi^X + \frac{\Delta\phi_{adjust}}{2\pi} \cdot \frac{1}{|f_{syn}^{src} - f_{syn}^{trg}|} + n \cdot \frac{1}{|f_{syn}^{src} - f_{syn}^{trg}|} \quad (5.19)$$

## 5.2. GMT systematic Investigation

---

The uncertainty of the phase alignment is caused by the uncertainty of the phase extrapolation and the uncertainty of the timestamp, calculated by eq. 5.20

$$\begin{aligned}\delta t_{align} &= \sqrt{\left(\frac{\partial t_{align}}{\partial t_\psi^X} \delta t_\psi^X\right)^2 + \left(\frac{\partial t_{align}}{\partial \psi_0^{src}} \delta \psi_0^{src}\right)^2 + \left(\frac{\partial t_{align}}{\partial \psi_0^{trg}} \delta \psi_0^{trg}\right)^2} \\ &= \sqrt{(\delta t_\psi^X)^2 + \left(\frac{1}{2\pi} \frac{1}{|f_{syn}^{src} - f_{syn}^{trg}|} \frac{\partial \Delta\phi_{adjust}}{\partial \psi_0^{src}} \delta \psi_0^{src}\right)^2 + \left(\frac{1}{2\pi} \frac{1}{|f_{syn}^{src} - f_{syn}^{trg}|} \frac{\partial \Delta\phi_{adjust}}{\partial \psi_0^{trg}} \delta \psi_0^{trg}\right)^2}\end{aligned}\quad (5.20)$$

The relation between  $\Delta\phi_{adjust}$  and  $\Delta\phi_{syn\_0}$  is explained in Chap. 4, see eq. 4.18. Because  $\Delta\phi_{adjust}$  and  $\Delta\phi_{syn\_0}$  have a linear relationship and the linear slope is 1,  $\frac{\partial \Delta\phi_{adjust}}{\partial \psi_0^{trg}} = \frac{\partial \Delta\phi_{syn\_0}}{\partial \psi_0^{trg}}$  and  $\frac{\partial \Delta\phi_{adjust}}{\partial \psi_0^{src}} = \frac{\partial \Delta\phi_{syn\_0}}{\partial \psi_0^{src}}$ . Based on eq. 5.14, we get the partial derivative of  $\Delta\phi_{adjust}$  with respect to  $\psi_0^{src}$  and  $\psi_0^{trg}$ .

$$|\frac{\partial \Delta\phi_{adjust}}{\partial \psi_0^{trg}}| = |\frac{\partial \Delta\phi_{adjust}}{\partial \psi_0^{src}}| = \begin{cases} 1, & f_{bucket} = f_{syn}^{trg} \\ \frac{h_{syn}^{trg}}{h_{rev}^{trg}}, & f_{bucket} = f_{rev}^{trg} \end{cases} \quad (5.21)$$

$\delta \psi_0^{src} = \delta \psi_0^{trg}$  and Substituting eq. 5.21 into eq. 5.20, we get

$$\delta t_{align} = \begin{cases} \sqrt{(\delta t_\psi^X)^2 + 2(\frac{1}{2\pi} \frac{1}{|f_{syn}^{src} - f_{syn}^{trg}|} \delta \psi_0^{src})^2}, & f_{bucket} = f_{syn}^{trg} \\ \sqrt{(\delta t_\psi^X)^2 + 2(\frac{1}{2\pi} \frac{1}{|f_{syn}^{src} - f_{syn}^{trg}|} \frac{h_{syn}^{trg}}{h_{rev}^{trg}} \delta \psi_0^{src})^2}, & f_{bucket} = f_{rev}^{trg} \end{cases} \quad (5.22)$$

Tab. 5.9 shows the uncertainty of the phase alignment for all FAIR use cases. For more details about parameters, please see Chap. 6.

The uncertainty of the phase alignment for all FAIR use cases is much smaller than the length of the synchronization window. Hence, the influence of the propagation of the uncertainty on the bunch-to-bucket injection center mismatch within the synchronization window is negligible. The uncertainty of the phase extrapolation 100 ps and the uncertainty of the timestamp  $t_\psi^X$  are acceptable for the FAIR B2B transfer system.

### 5.2.1.2 Uncertainty of the Start of the Synchronization Window

The start of the synchronization window is expressed as

$$t_w = t_\psi^X + \Delta t_w \quad (5.23)$$

with

$$\Delta t_w = \begin{cases} 600 \mu\text{s} + T - t_{delay} & \text{Phase shift method} \\ \frac{\Delta\phi_{adjust}}{2\pi} \cdot \frac{1}{|f_{syn}^{src} - f_{syn}^{trg}|} + n \cdot \frac{1}{|f_{syn}^{src} - f_{syn}^{trg}|} - \frac{T_w}{2} - t_{delay} & \text{Frequency beating method} \end{cases} \quad (5.24)$$

For more details, please see Chap. 4.

The synchronization window is used to select the first rising edge of the bucket indication signal. In reality, the relative position between the start of the synchronization window and the first rising edge of the bucket indication signal is random.

## 5.2. GMT systematic Investigation

---

Table 5.9: Uncertainty of the phase alignment of all FAIR B2B use cases

Use cases of FAIR accelerators	$\delta\psi_0^X$	$ f_{syn}^{src} - f_{syn}^{trg} $	$\delta t_{align}$	$T_w$
$U^{28+}$ B2B transfer from the SIS18 to the SIS100	0.006°	200 Hz	1.174 $\mu$ s	6.359 $\mu$ s
$H^+$ B2B transfer from the SIS18 to the SIS100	0.010°	200 Hz	0.983 $\mu$ s	3.678 $\mu$ s
$h=4$ B2B transfer from the SIS18 to the ESR	0.025°	1899 Hz	0.103 $\mu$ s	1.456 $\mu$ s
$h=1$ B2B transfer from the SIS18 to the ESR	0.036°	1368 Hz	0.104 $\mu$ s	1.017 $\mu$ s
B2B transfer from the ESR to the CRYRING	0.025°	949 Hz	0.102 $\mu$ s	1.456 $\mu$ s
$H^+$ B2B transfer from the SIS100 to the CR via the Pbar target	0.002°	450 Hz	0.019 $\mu$ s	18.226 $\mu$ s
RIB B2B transfer from the SIS100 to the CR via the Super FRS	0.004°	108 Hz	0.154 $\mu$ s	9.779 $\mu$ s
Antiproton B2B transfer from the CR to the HESR	0.004°	136 Hz	0.123 $\mu$ s	9.860 $\mu$ s
B2B transfer from the SIS18 to the ESR via the FRS	0.008°	4249 Hz	7 ns	4.553 $\mu$ s

In order to guarantee the correct selection of the rising edge of the bucket indication signal at both the source and target synchrotrons, the start of the synchronization window will be rectified to half the period of the bucket indication signal before the selected rising edge. The rectified start is called the “best estimate of the start of the synchronization window”, denoted as  $t_{w\_rect}$ . The value used for the rectification is denoted as  $\Delta t_{w\_rect}$ , see Fig. 5.10. However, the actual start of the synchronization window is impossible to be exactly at  $t_{w\_rect}$  because of the propagation of the uncertainty. The start of the synchronization window lies between  $t_{w\_rect} - \delta t_{w\_rect}$  and  $t_{align} + \delta t_{w\_rect}$ , where  $\delta t_{w\_rect}$  is the uncertainty of the start of the synchronization window.

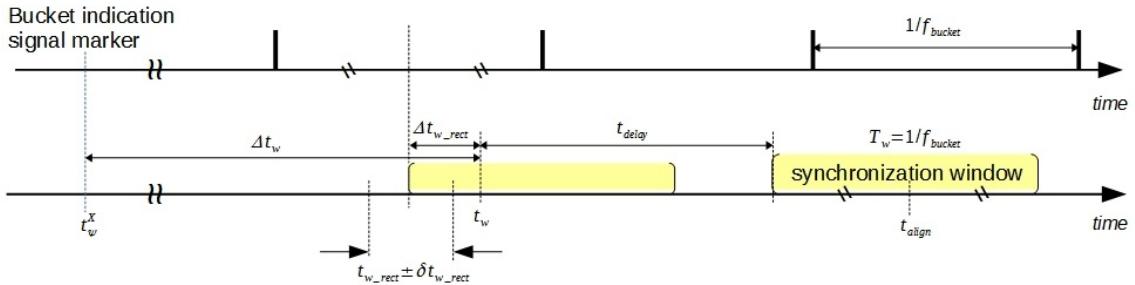


Figure 5.10: The rectification of the start of the synchronization window.

## 5.2. GMT systematic Investigation

---

The rectification for the start of the synchronization window is calculated by

$$\Delta t_{w\_rect} = \frac{1}{2f_{B2B}^{trg}} - [(\Delta t_w - \frac{2\pi - \psi_0^{trg}}{2\pi} \frac{1}{f_{B2B}^{trg}}) \bmod \frac{1}{f_{B2B}^{trg}}] \quad (5.25)$$

The best estimate of the start of the synchronization window is calculated by

$$t_{w\_rect} = t_\psi^X + \Delta t_w + \Delta t_{w\_rect} \quad (5.26)$$

The uncertainty of  $t_{w\_rect}$  is caused by the uncertainty of the phase extrapolation and the uncertainty of the timestamp, calculated by

$$\begin{aligned} \delta t_{w\_rect} &= \sqrt{\left(\frac{\partial t_{w\_rect}}{\partial t_\psi^X} \delta t_\psi^X\right)^2 + \left(\frac{\partial t_{w\_rect}}{\partial \psi_0^{src}} \delta \psi_0^{src}\right)^2 + \left(\frac{\partial t_{w\_rect}}{\partial \psi_0^{trg}} \delta \psi_0^{trg}\right)^2} \\ &= \sqrt{(\delta t_\psi^X)^2 + \left(\frac{\partial \Delta t_w}{\partial \psi_0^{src}} + \frac{\partial \Delta t_{w\_rect}}{\partial \psi_0^{src}}\right)^2 (\delta \psi_0^{src})^2 + \left(\frac{\partial \Delta t_w}{\partial \psi_0^{trg}} + \frac{\partial \Delta t_{w\_rect}}{\partial \psi_0^{trg}}\right)^2 (\delta \psi_0^{trg})^2} \quad (5.27) \\ &= \sqrt{(\delta t_\psi^X)^2 + \left(\frac{1}{2\pi} \frac{1}{f_{B2B}^{trg}} \delta \psi_0^{trg}\right)^2} \end{aligned}$$

For FAIR use cases,  $f_{B2B}^{trg}$  is in the 100 kHz range and  $\delta \psi_0^{trg}$  is less than  $0.05^\circ$  (see Tab. 5.9). Hence,  $\delta t_{w\_rect} < 2\text{ns}$ , which can be negligible.

### 5.2.1.3 Accuracy of the Start of the Synchronization Window

The actual start of the synchronization window is impossible to be exactly at the best estimate of the start of the synchronization window because of random uncertainty (e.g. the transition time from low to high voltage of digital IO ports) and systematic uncertainty (e.g. the FPGA process time). The accuracy of the start of the synchronization window is the deviation between the theoretically calculated start time and the actual observed start time on SCUs. The FAIR B2B transfer system will be used for all FAIR use cases. Therefore, we have to find the most stringent accuracy requirement. The shortest synchronization window is 1.017 µs, which comes from h=1 B2B transfer from the SIS18 to the ESR. We keep 20 ns as a forbidden range, which means that the actual start is not allowed 20 ns before and after the bucket indication signal marker. The green region in Fig. 5.11 represents the safety margin for the start of the synchronization window and the red region the forbidden range. So the requirement of the accuracy of the start of the synchronization window is

$$Accuracy = \pm \frac{1.017 \text{ us} - 20 \text{ ns} \cdot 2}{2} \approx \pm 488 \text{ ns} \quad (5.28)$$

## 5.2.2 Characterization of WR Network

Within this dissertation, a network analyzer, a Xena traffic generator<sup>1</sup>, is used to characterize the properties of the WR network, which are relevant to the B2B transfer. The Xena traffic generator offers a new class of professional Layer 2-3 Gigabit

---

<sup>1</sup><http://xenanetworks.com/layer-2-3-platform/>

## 5.2. GMT systematic Investigation

---

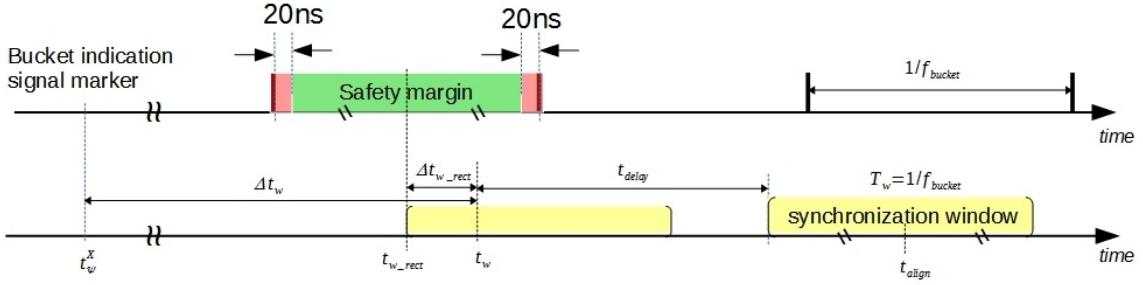


Figure 5.11: The accuracy of the start of the synchronization window.

Ethernet test platform. The Xena traffic generator sends traffic streams with a unique stream ID and receives the identical traffic streams for identifying the mentioned measurement. It can be used for the following measurements.

- lost frame - the difference between the sent packets and the received packets
- misordered frame - the number of misordered packets arriving out of sending sequence
- payload error frame - the number of packets received that failed the frame check sequence
- frame transfer latency - the time interval between the time of Xena port receiving a frame and the time of another Xena port sending the same frame

For the measurements reported in the dissertation, the lost frame, the misordered frame and the payload error frame are taken into consideration in the format of the frame error rate (FER), which is defined as the percentage of frames with these three types of errors relative to the total number of transferred frames during a studied time interval.

$$FER = \frac{\text{lost frame} + \text{misordered frame} + \text{payload error frame}}{\text{total number of transferred frames}} \quad (5.29)$$

The following types of traffic are considered in the network test.

- DM Broadcast

The DM forwards broadcast timing frames downwards to all FECs. The average bandwidth for the DM broadcast is 100 Mbit/s. The burst<sup>2</sup> speed is 12 packets per 100 µs.

- DM Unicast

The DM sends 10 Mbit/s unicast timing frames to some specified FECs at the burst speed of 3 packets per 300 µs.

- B2B Unicast

The B2B source SCU sends two timing frames upwards to the DM within 10 ms for each cycle. Every supercycle contains four cycles. The maximum supercycle repetition frequency for FAIR is the repetition frequency of the  $U^{28+}$  supercycle, 2.82 Hz. The bandwidth is  $2.82 \cdot 4 \cdot 2 \cdot 880 < 20$  kbit/s.

<sup>2</sup>A group of consecutive frames with shorter inter frame gaps than frames arriving before or after the burst of frames.

## 5.2. GMT systematic Investigation

---

- B2B Broadcast

Maximum 10 B2B broadcast timing frames are sent within 10 ms for each cycle. So the bandwidth is  $2.82 \cdot 4 \cdot 10 \cdot 880 < 100 \text{ kbit/s}$ .

- Management Traffic

The average bandwidth for the management traffic is 10 Mbit/s. It broadcasts packets with random Ethernet frame length from 64 bytes to 1518 bytes.

For the WR network for FAIR, three VLANs with different priorities are applied according to the importance of the traffic. The DM Broadcast, DM Unicast and B2B Unicast are assigned to the VLAN 7 with the highest priority. The B2B Broadcast is assigned to the VLAN 6 with the secondary high priority and the Management Traffic is assigned to the VLAN 5 with the lowest priority.

### 5.2.2.1 Requirement of B2B Traffic

The requirement of the FER for the B2B Broadcast ( $FER_{req\_Broadcast}$ )/B2B Unicast ( $FER_{req\_Unicast}$ ) traffic is defined as the percentage of maximum one frame error occurrence relative to the total number of B2B Broadcast/B2B Unicast transferred frames over a year.

$$FER_{req\_Broadcast} = \frac{1}{2.82 \cdot 4 \cdot 10 \cdot 3.15 \cdot 10^7 \cdot 17} = 1.6 \cdot 10^{-11} \quad (5.30)$$

$$FER_{req\_Unicast} = \frac{1}{2.82 \cdot 4 \cdot 2 \cdot 3.15 \cdot 10^7} = 1.4 \cdot 10^{-9} \quad (5.31)$$

The requirements for the B2B Broadcast and Unicast traffic are summarized in Tab. 5.10.

Table 5.10: B2B transfer requirements on the WR network

	Frame error rate	Upper bound latency of WR network
B2B Broadcast	$< 1.6 \cdot 10^{-11}$	500 $\mu\text{s}$
B2B Unicast	$< 1.4 \cdot 10^{-9}$	500 $\mu\text{s}$

## 5.2. GMT systematic Investigation

---

### 5.2.2.2 WR Network Test Setup

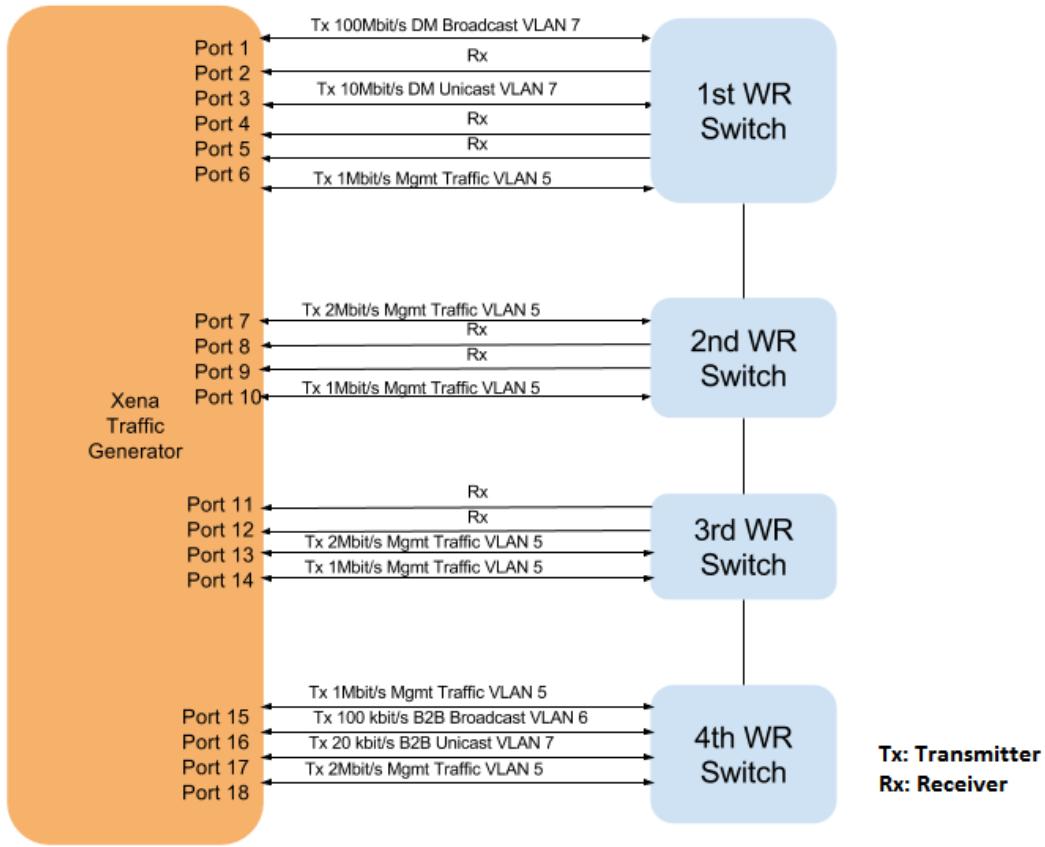


Figure 5.12: The WR network test setup.

Based on the mentioned traffic, the measurement setup is built, see Fig. 5.12. Four WR switches are connected to the port 1 to 18 of the Xena traffic generator. All ports of four WR switches are assigned to three VLANs, VLAN 5, VLAN 6 and VLAN 7. Tab. 5.11 shows the bandwidth, VLAN, VLAN priority and usage of the traffic of each Xena port in details. The test is running for 45 days. More test configuration and results, please see “Testing the WR Network of the FAIR General Machine Timing System“ [? ].

### 5.2.2.3 Test Result of Frame Error Rate

- Frame error rate of the B2B Unicast frames

The FER of the B2B Unicast traffic is measured from the port 17 to the port 1. The B2B Unicast traffic has no loss frame, no misordered frame and no payload error frame, so the FER of the B2B Unicast traffic is 0.

- Frame error rate of the B2B Broadcast frames

The FER of the B2B Broadcast traffic is measured from the port 16 to other ports. For the B2B Broadcast frames, there is no misordered frame and no payload error frame. Hence, the FER is caused only by the loss frame. There is frame loss from the port 16 to the port 11, 12, 17 and 18. The frame loss rate is defined as the percentage of the number of lost frames to the total

## 5.2. GMT systematic Investigation

---

Table 5.11: The connection between the traffic generator and WR switches

Switch	Xena Port	Traffic	VLAN	Priority	Usage
WR switch 1	Port 1	100 Mbit/s 110bytes	7	7	DM Broadcast
	Port 2	Rx traffic			
	Port 3	10 Mbit/s 110bytes	7	7	DM Unicast
	Port 4	Rx traffic			
	Port 5	Rx traffic			
	Port 6	1 Mbit/s 64 - 1518 bytes	5	5	Management Broadcast
WR switch 2	Port 7	2 Mbit/s 64 - 1518 bytes	5	5	Management Broadcast
	Port 8	Rx traffic			
	Port 9	Rx traffic			
	Port 10	1 Mbit/s 64 - 1518 bytes	5	5	Management Broadcast
WR switch 3	Port 11	Rx traffic			
	Port 12	Rx traffic			
	Port 13	2 Mbit/s 64 - 1518 bytes	5	5	Management Broadcast
	Port 14	1 Mbit/s 64 - 1518 bytes	5	5	Management Broadcast
WR switch 4	Port 15	1 Mbit/s 64 - 1518 bytes	5	5	Management Broadcast
	Port 16	100 kbit/s 110bytes	6	6	B2B Broadcast
	Port 17	20 kbit/s 110bytes	7	7	B2B Unicast
	Port 18	2 Mbit/s 64 - 1518 bytes	5	5	Management Broadcast

number of B2B Broadcast transferred frames on a specified port over the test duration. The frame loss rate from the port 16 to the port 11, 12, 17 and 18 is  $1.78 \cdot 10^{-8}$ , see Fig. 5.13.

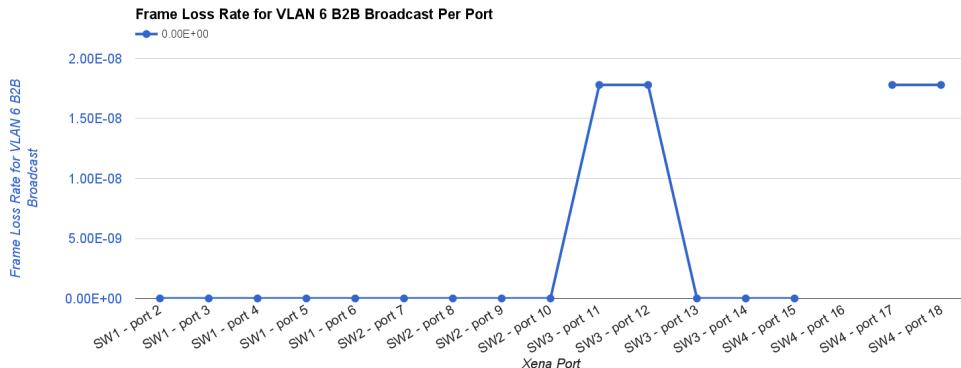


Figure 5.13: Frame loss rate of the B2B Broadcast frames.

## 5.2. GMT systematic Investigation

---

According to the frame loss rate, the FER can be calculated

$$FER_{Broadcast} = \frac{1.78 \cdot 10^{-8} \cdot 4}{17} = 4.2 \cdot 10^{-9} \quad (5.32)$$

Compared with the FER requirement in Tab. 5.10, the B2B Unicast traffic meets the requirement and the B2B Broadcast traffic does not meet the requirement.

### 5.2.2.4 Test Result of Frame Transfer Latency

- Maximum frame transfer latency of the B2B Broadcast frames

For the B2B Broadcast frames, the frame transfer latency of the stream from the port 16 to other ports are measured.

Fig. 5.14 and Tab. 5.12 shows the test result for the maximum frame transfer latency of the B2B Broadcast frames.

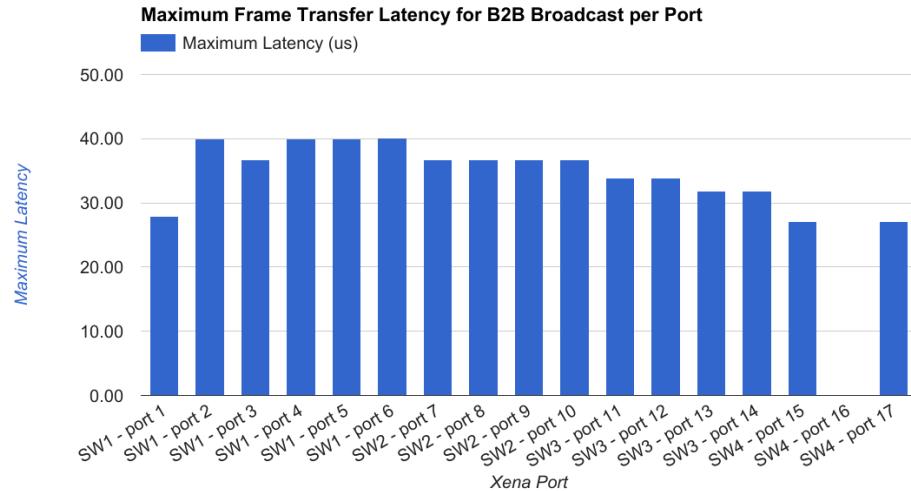


Figure 5.14: The maximum frame transfer latency for B2B Broadcast frames.

Table 5.12: The maximum frame transfer latency of the B2B Broadcast frames

	WR switch 4	WR switch 4, 3	WR switch 4, 3, 2	WR switch 4, 3, 2, 1
Maximum frame transfer latency	28 $\mu$ s	34 $\mu$ s	37 $\mu$ s	41 $\mu$ s

From the test result, we get the conclusion that every WR switch causes a maximum 30  $\mu$ s delay.

- Maximum frame transfer latency for the B2B Unicast frames

For the B2B Unicast frames, the maximum frame transfer latency of the stream from the port 17 to the port 1 is measured, see Fig. 5.15.

## 5.2. GMT systematic Investigation

---

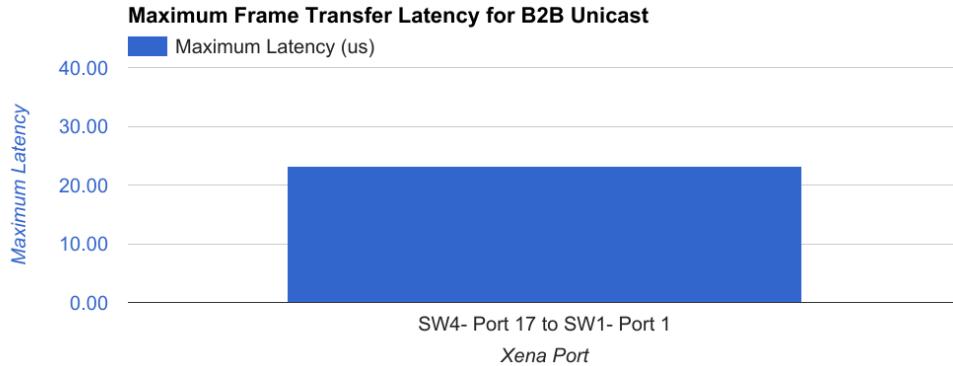


Figure 5.15: The maximum frame transfer latency for B2B Unicast frames.

For the B2B Unicast frames, the 4 WR switch network has approximate 23  $\mu$ s maximum frame transfer latency.

### 5.2.2.5 Conclusion

Tab. 5.13 summarizes the test result.

Table 5.13: The result of the WR network test for the B2B transfer

	Frame error rate	Maximum frame transfer latency
B2B Broadcast	$4.2 \cdot 10^{-9}$	30 $\mu$ s/switch
B2B Unicast	0	23 $\mu$ s/4switch

The frame loss rate of the B2B Unicast frames meets the requirement. But the frame loss rate of the B2B Broadcast frames doesn't meet the requirement. The firmware of the WR switch is still under development by CERN. The frame loss rate for the B2B Broadcast frames doesn't meet the requirement. The firmware of the WR switch is still under development by CERN.

For the B2B transfer system, the upper bound latency of the frames on the WR network is 500  $\mu$ s, see Tab.5.10. According to the test result, the maximum frame transfer latency for each WR layer is 30  $\mu$ s. The latency of the WR network is decided by the layers of WR switches and the length of the optical fiber. The propagation of light through the core of an optical fiber is roughly about 200 m/ $\mu$ s [?] and the longest distance in the FAIR campus is around 2 km, so the latency of a 2 km optical fiber is about 10  $\mu$ s. The layers of WR switches play a more important role in the latency.

Here we calculate the tolerable layer of the WR switch between the B2B related SCUs and between the B2B related SCUs and DM.

$$\frac{500 \mu\text{s} - 10 \mu\text{s}}{30 \mu\text{s}/\text{switch}} > 16 \quad (5.33)$$

## 5.3 Kicker systematic Investigation

The SIS18 extraction kicker is consisted of nine kicker magnets. In the existing topology, five kicker magnets are equally located in the 1<sup>st</sup> crate and the other four kicker magnets are equally located in the 2<sup>nd</sup> crate. The investigation is based on the assumption that the kicker magnets in one crate are controlled by a common kicker control electronics, which received a trigger signal from a common TD module. The nine kicker magnets could also be controlled by their own kicker control electronics and TD module. It is still an open issue. The kicker magnets in the same crate are triggered instantaneous by the trigger signal with the local delay compensation of the electronics, the length of the energy transmission cable and etc. Fig. 5.16 shows the schematic diagram of the kicker magnets in the 2<sup>nd</sup> crate of the SIS18 extraction kicker. The width of each kicker magnet is 0.25 m and the distance between two kicker magnets is 0.09 m. The distance between two crates is 19.17 m [? ].

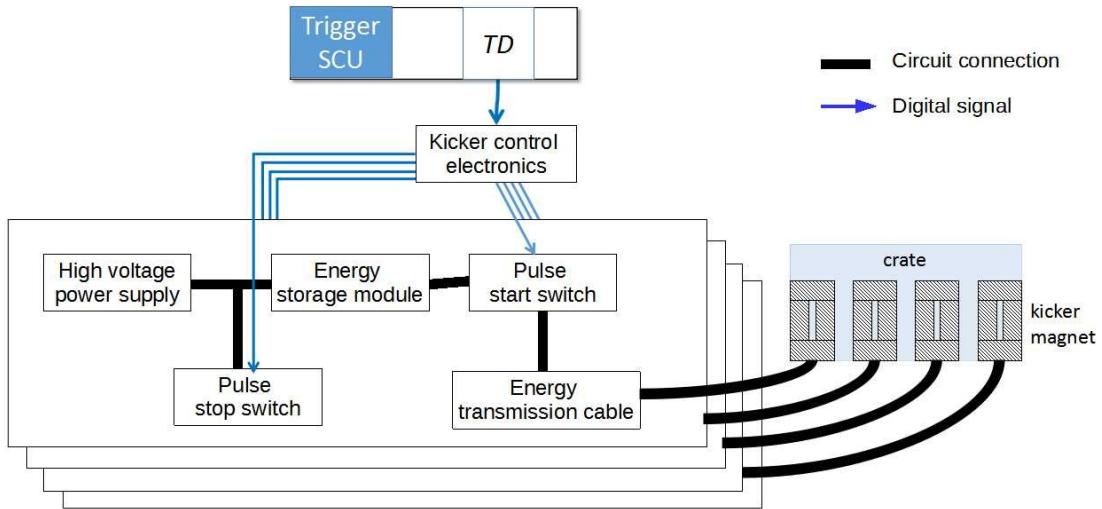


Figure 5.16: The schematic diagram of the kicker magnets in the 2<sup>nd</sup> crate of the SIS18 extraction kicker.

The SIS100 injection kicker is consisted of six kicker magnets, which are equally located in a common crate. The width of each kicker magnet is 0.22 m and the distance between two magnets is 0.23 m. For the B2B transfer, the rise time of SIS18 extraction kicker and SIS100 injection kicker magnet are 90 ns and 130 ns [? ]. The kicker rise time must fit within the bunch gap, e.g. 25% of the cavity rf period [? ? ]. The bunch gap is denoted by  $t_{gap}$ . All the analysis in this section dose not take the jitter of the kicker trigger signal into consideration (approximate 1 ns). Here we are discussing about the following possibilities of the kicker trigger, which are still open issues.

- For the SIS18 extraction kicker, whether the kicker magnets in the 2<sup>nd</sup> crate could be fired a fixed delay after the firing of the kicker magnets in the 1<sup>st</sup> crate for ion beams over the whole range of stable isotopes.
- For the SIS100 injection kicker, whether the kicker magnets could be fired instantaneously.

## 5.3. Kicker systematic Investigation

### 5.3.1 SIS18 Extraction Kicker

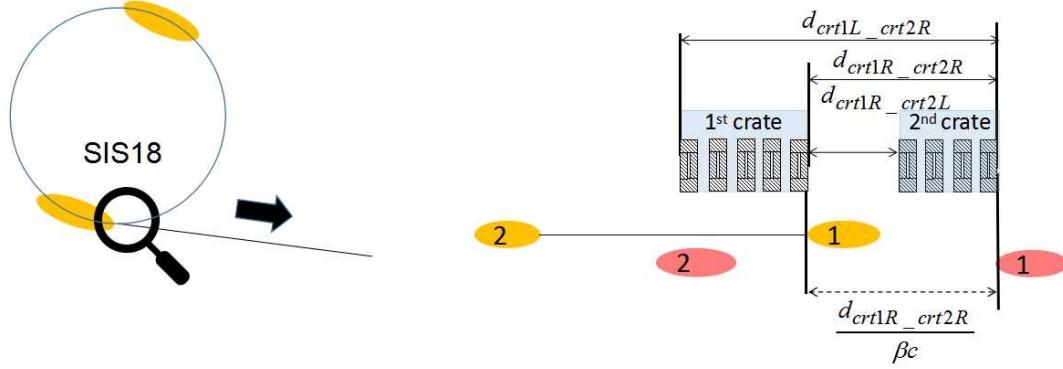


Figure 5.17: A possible firing delay between kicker magnets in two crates of SIS18 extraction kicker.

The bunch is firstly kicked by kicker magnets in the 1<sup>st</sup> crate and than kicked by the kicker magnets in the 2<sup>nd</sup> crate to the transfer line. The yellow and red ellipse represents the position of the bunches, when the kicker magnets in the 1<sup>st</sup> and 2<sup>nd</sup> crate are fired. The number in the ellipse is used to tell different bunches. The head of the bunch is at the right side. The bunch 2 is firstly kicked.

Fig. 5.17 shows a possible firing delay between kicker magnets in two crates.  $d_{crt1R-crt2L}$  denotes the distance between two crates, which equals to 19.17 m.  $d_{crt1L-crt2R}$  denotes the distance from the leftmost to the rightmost kicker magnet, which equals to 22.05 m =  $d_{crt1R-crt2L} + 9 \cdot 0.25\text{ m} + 7 \cdot 0.09\text{ m}$ .  $d_{crt1R-crt2R}$  denotes the distance between the rightmost of the 1<sup>st</sup> crate to the rightmost of the 2<sup>nd</sup> crate, which equals to 20.44 m =  $d_{crt1R-crt2L} + 4 \cdot 0.25\text{ m} + 3 \cdot 0.09\text{ m}$ . The kicker magnets in the 1<sup>st</sup> crate are fired when the tail of the bunch 1 passes by the 1<sup>st</sup> crate completely. The kicker magnets in the 2<sup>nd</sup> crate are fired when the tail of the bunch 1 passes by the 2<sup>nd</sup> crate completely. The delay for the firing two crates in this scenario is  $d_{crt1R-crt2R}/\beta c$ .

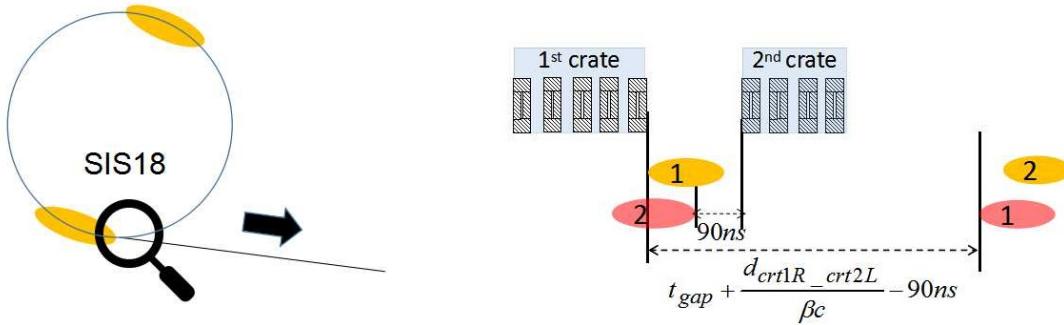


Figure 5.18: The maximum firing delay between kicker magnets in two crates of SIS18 extraction kicker.

Fig. 5.18 shows the scenario of the maximum firing delay between kicker magnets in two crates. The kicker magnets in the 1<sup>st</sup> crate are fired when the tail of the

### 5.3. Kicker systematic Investigation

---

bunch 1 passes by the 1<sup>st</sup> crate completely. The kicker magnets in the 2<sup>nd</sup> crate are fired 90 ns before the head of the bunch 2 passes by it. The delay equals to  $t_{gap} + d_{crt1R-crt2L}/\beta c - 90$  ns.

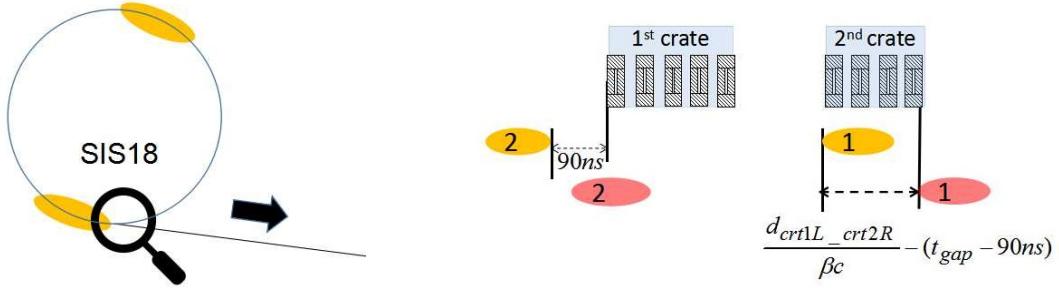


Figure 5.19: The minimum firing delay between kicker magnets in two crates of SIS18 extraction kicker.

Fig. 5.19 shows the scenario of the minimum firing delay. The kicker magnets in the 1<sup>st</sup> crate are fired 90 ns before the head of the bunch 2 passes by it. The kicker magnets in the 2<sup>nd</sup> crate are fired when the bunch 1 passes by the 2<sup>nd</sup> crate. The delay is  $d_{crt1L-crt2R}/\beta c - (t_{gap} - 90$  ns).

Here we take three ion beams,  $H^+$ ,  $U^{28+}$  and  $U^{73+}$ , to check the maximum and minimum firing delay for kicker magnets in two crates, because the boundary ion species have the most stringent requirements. Tab. 5.14 shows the longest and shortest firing delay for three ion beams.

Table 5.14: The firing delay for SIS18 kicker magnets in two crates

Beam	$\beta$	bunch gap $t_{gap}$	minimum delay $\frac{d_{crt1L-crt2R}}{\beta c} - (t_{gap} - 90\text{ ns})$	maximum delay $t_{gap} + (\frac{d_{crt1R-crt2L}}{\beta c} - 90\text{ ns})$
$H^+$	0.982	184 ns	0 ns	163 ns
$U^{28+}$	0.568	159 ns	61 ns	189 ns
$U^{73+}$	0.872	104 ns	70 ns	92 ns

According to the result, a constant firing delay is available for firing kicker magnets in two crate for all ion beams, e.g. 85 ns.

#### 5.3.2 SIS100 Injection Kicker

Two bunches from SIS18 will be transferred into two SIS100 rf buckets in each B2B transfer. The SIS100 injection kicker must reach to the kicker flat-top during the bunch gap. For the instantaneous firing, all kicker magnets are fired only if the tail of the circulating bunch passes the rightmost kicker magnet. The “kicker passing time” is defined as the time needed for the tail of a bunch to pass from the rightmost magnet to the leftmost kicker magnet. The rise time of the kicker magnet is shorter than 130 ns [? ]. The distance from the rightmost to the leftmost kicker magnet  $d_{crtL-crtR}$  is  $3.79\text{ m} = 6 \cdot 0.22\text{ m} + 5 \cdot 0.23\text{ m}$ . Two of ten buckets are always empty,

## 5.4. Test Setup for Data Collection, Merging and Redistribution

so  $t_{gap} = (2 + 0.25) \cdot T_{rf}^{SIS100}$ . If the sum of the kicker passing time and rise time is shorter than the bunch gap, all kicker magnets could be fired instantaneous, see Fig. 5.15. Tab. 5.15 shows the sum of the kicker passing time and rise time for  $H^+$ ,  $U^{28+}$  and  $U^{73+}$  beams and the corresponding bunch gap.

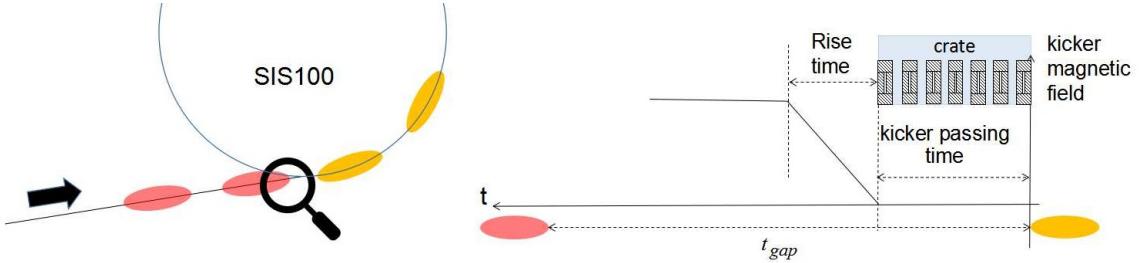


Figure 5.20: SIS100 injection kicker.

*Yellow ellipse represents circulating bunches in SIS100 and red ones bunches to be injected. The head of the bunch is at the right side.*

Table 5.15: The delay for firing SIS00 injection kicker

Beam	$\beta$	kicker passing time $\frac{d_{crtL}-crtR}{\beta c}$	Rise time	Sum $\frac{d_{crtL}-crtR}{\beta c} + 130 \text{ ns}$	bunch gap $t_{gap}$
$H^+$	0.982	3 ns	< 130 ns	133 ns	828 ns
$U^{28+}$	0.568	22 ns	< 130 ns	152 ns	1431 ns
$U^{73+}$	0.872	15 ns	< 130 ns	145 ns	932 ns

Tab. 5.15 shows that the sum of the kicker passing time and rise time is much shorter than the bunch gap, so the SIS100 kicker magnets could be fired instantaneous.

## 5.4 Test Setup for Data Collection, Merging and Redistribution

In this section, the test setup for the FAIR B2B transfer system is described, focusing mainly on the timing aspects.

### 5.4.1 Functionality of the Test Setup

Because some modules of the FAIR B2B transfer system are still under development, the test setup realizes partial functionality, mainly concentrated on the data collection, the data calculation and the data distribution. The detailed procedure of the partial functionality is

- After receiving `CMD_B2B_START`, both the B2B source and target SCUs collect the extrapolated phase equivalent data locally. The equivalence is a timestamp

## 5.4. Test Setup for Data Collection, Merging and Redistribution

of the positive zero-crossing of the simulated phase measurement signal of the SIS18 and the SIS100.

- The B2B target SCU transfers the frame TGM\_PHASE\_TIME containing the timestamp to the B2B source SCU.
- After receiving the data, the B2B source SCU calculates the synchronization window.
- The B2B source SCU sends the frame TGM\_SYNCH\_WIN containing the start timestamp of the synchronization window to the WR network.
- After receiving the frame, the Trigger SCU produces a TTL output indicating the start of the synchronization window.

### 5.4.2 Test Setup

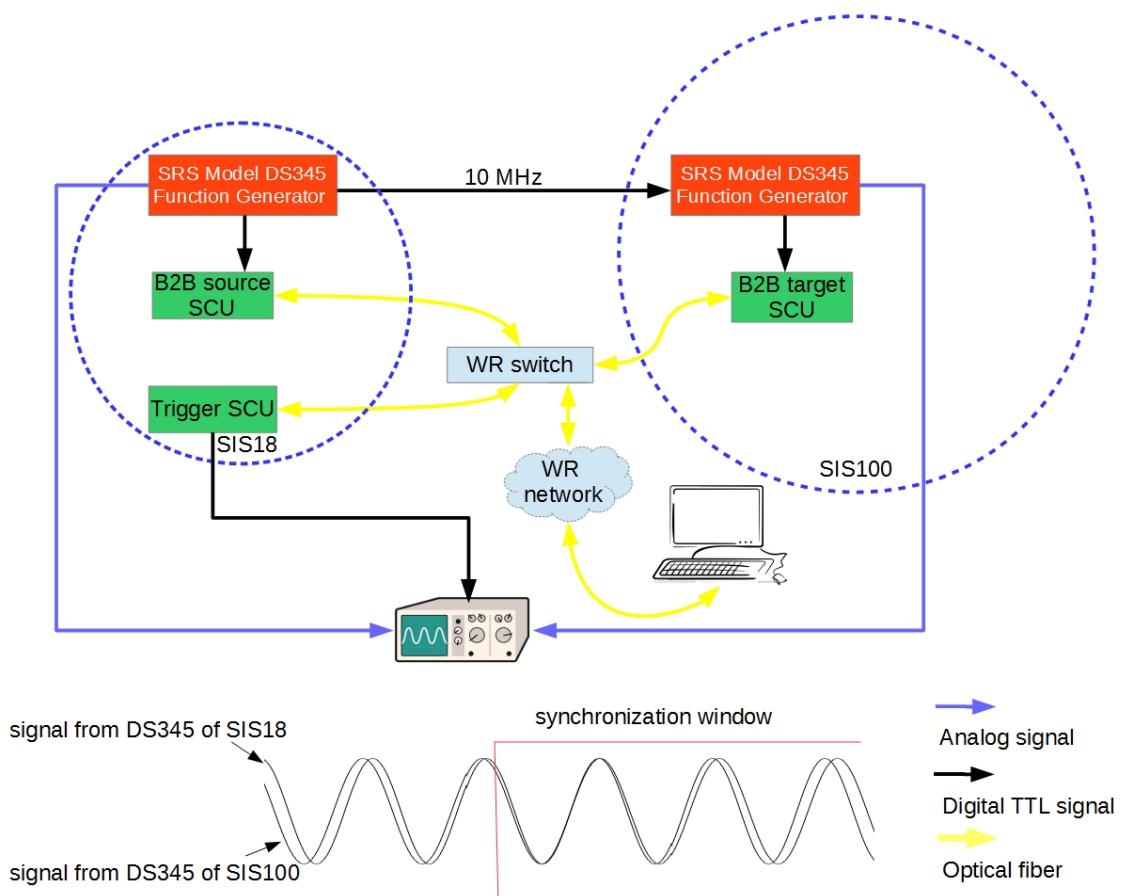


Figure 5.21: Schematic of the test setup.

Fig. 5.21 shows the schematic of the test setup. In this test setup, two SRS MODEL DS345 Synthesized Function Generators<sup>3</sup> (short: DS345) are used to simulate the phase measurement signals of the SIS18 and that of the SIS100. The DS345 of

<sup>3</sup><http://www.thinksrs.com/downloads/PDFs/Manuals/DS345m.pdf>

## 5.4. Test Setup for Data Collection, Merging and Redistribution

---

the SIS18 is synchronized to an internal 10 MHz clock, which works as an external reference clock for the DS345 of the SIS100. The B2B source SCU, the B2B target SCU and the Trigger SCU are connected to a WR switch, which connects to the timing network. A PC<sup>4</sup> is used as a DM to produce the B2B start timing frame CMD\_B2B\_START. Besides, it monitors the status of the B2B transfer programs in all SCUs. The oscilloscope is used to monitor the alignment of two simulated phase measurement signals within the synchronization window provided by the Trigger SCU.

Fig. 5.22 shows the front view of the real test setup. The SIS18 DS345 produces 1.5722 MHz sine wave and the SIS100 DS345 produces 1.572 MHz sine wave to the oscilloscope. The SIS18 DS345 produces a digital TTL signal for the B2B source SCU, whose rising edges are aligned with the positive zero-crossings of the sine wave of 1.572 200 MHz and the SIS100 DS345 produces a digital TTL signal for the B2B target SCU, whose rising edges are synchronized to the positive zero-crossings of the sine wave of 1.572 000 MHz. So the beating frequency is 200 Hz and the beating period is 5 ms.

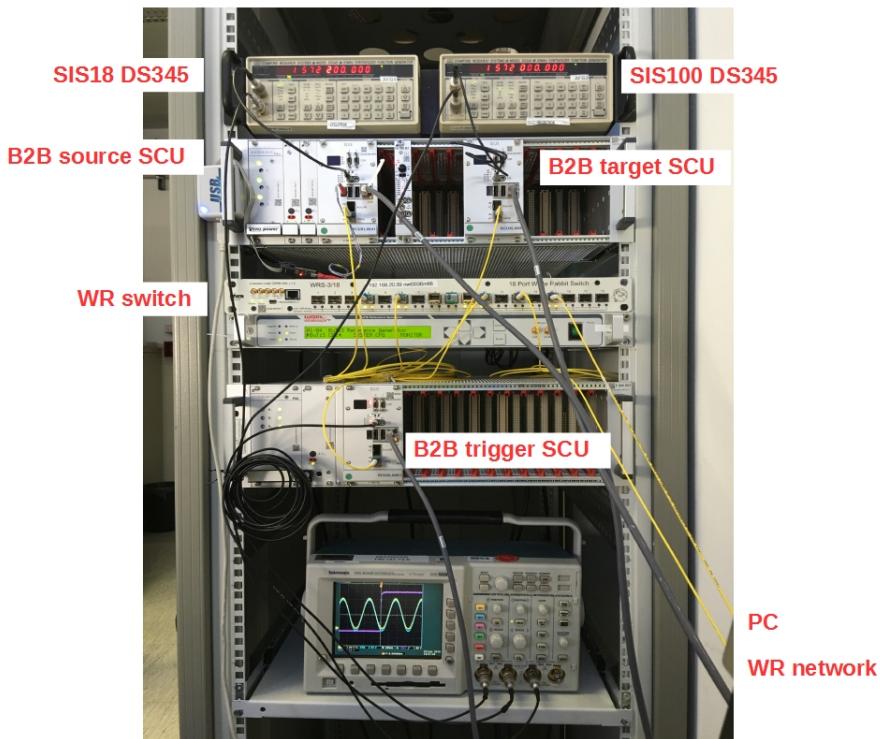


Figure 5.22: The front view of the test setup.

Compared with the final scenario, there are some difference of the test setup.

- The phase measurement signals will be produced by the Group DDS.
- The B2B source and target SCUs will get the phase of the phase measurement signals directly from the PAP modules.
- The B2B source SCU will transfer the required phase shift to the PSM for the phase shift and the phase correction to the Trigger SCUs.

---

<sup>4</sup>A Linux personal computer is installed with the standard TR tools and library.  
<https://www-acc.gsi.de/wiki/Timing/TimingSystemNodesCurrentRelease>

## 5.4. Test Setup for Data Collection, Merging and Redistribution

- The B2B Trigger SCU will consider not only the synchronization window, but also the kicker delay compensation from the SM. Besides, it has several SCU slaves, which coordinate the correct B2B extraction and injection kicker with other systems, e.g. the MPS.

### 5.4.3 Firmware

The B2B source, B2B target and Trigger SCUs have different firmware running on their soft CPU, LM32<sup>5</sup>. The firmware are activated by the B2B start timing frame, **CMD\_B2B\_START**, which indicates the source and target synchrotrons of the B2B transfer.

- Firmware for the B2B source SCU

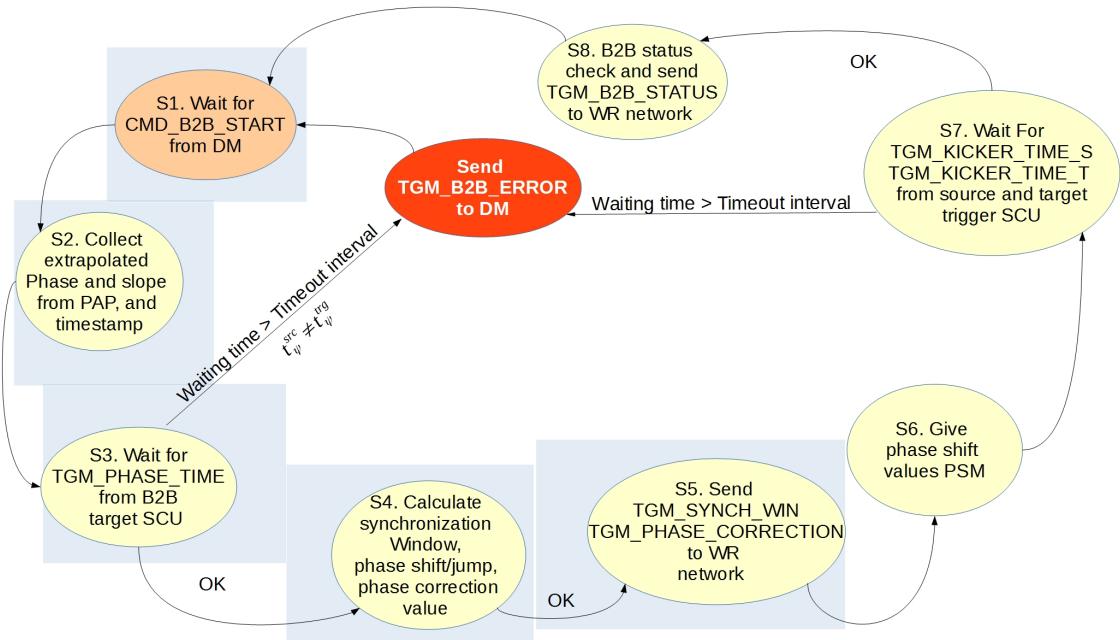


Figure 5.23: Flow chart of the firmware for the B2B source SCU.

“Step“ is represented as “S“ in the figure. The steps realized by the test setup are marked by the blue rectangle.

The firmware for the B2B source SCU is the core program of the B2B transfer system, see Fig. 5.23.

- Step 1. The program waits for the **CMD\_START\_B2B** timing frame.
- Step 2. When it receives the timing frame **CMD\_START\_B2B**, the program reads the extrapolated phase and the phase deviation slope from the PAP module, as well as the corresponding timestamp.
- Step 3. The program waits for the **TGM\_PHASE\_TIME** timing frame from the B2B target SCU, which contains the extrapolated phase, the corresponding timestamp and the slope of the phase deviation.

<sup>5</sup>LatticeMico32 is a 32-bit microprocessor soft core from Lattice Semiconductor optimized for field-programmable gate arrays (FPGAs).

## **5.4. Test Setup for Data Collection, Merging and Redistribution**

---

- Step 4. When the program receives the timing frame **TGM\_PHASE\_TIME** within a specified timeout interval, it checks whether the timestamp of the extrapolated phase of the target synchrotron equals to that of the source synchrotron. When they are equal, the program calculates the synchronization window, the phase shift/jump value and the phase correction value. When the program doesn't receive the timing frame **TGM\_PHASE\_TIME** within a specified timeout or two timestamp are not equal, it sends a timing frame **TGM\_B2B\_ERROR** to the WR network and goes back to the step 1, which indicates the timeout error of the frame.
- Step 5. The program sends the timing frame **TGM\_SYNCH\_WIN** and **TGM\_PHASE\_CORRECTION** to the WR network. **TGM\_SYNCH\_WIN** indicates the start of the synchronization window and **TGM\_PHASE\_CORRECTION** is used for the Trigger SCUs for the reproduction of the bucket indication signal.
- Step 6. The program gives the phase shift value to corresponding module.
- Step 7. The program waits for the timing frame **TGM\_KICKER\_TIME\_S** from the source Trigger SCU and **TGM\_KICKER\_TIME\_T** from the target Trigger SCU, which contains the extraction/injection kicker trigger and firing timestamp. When it does not receive the timing frames within a specified timeout interval, it sends a timing frame **TGM\_B2B\_ERROR** to the WR network and goes back to the step 1, which indicates the timeout error of the frame.
- Step 8. When the program receives the timing frames mentioned in the step 7 within a specified timeout interval, it checks the B2B transfer status and sends **TGM\_B2B\_STATUS** to the WR network and goes to the step 1. The B2B transfer is successful, if all of the following checks are correct. Or the B2B transfer is failure.
  - \* Trigger time < firing time of the extraction kicker of the source synchrotron
  - \* Trigger time < firing time of the injection kicker of the target synchrotron
  - \* Firing time of the extraction kicker < firing time of the injection kicker
- Firmware for the B2B target SCU

## 5.4. Test Setup for Data Collection, Merging and Redistribution

---

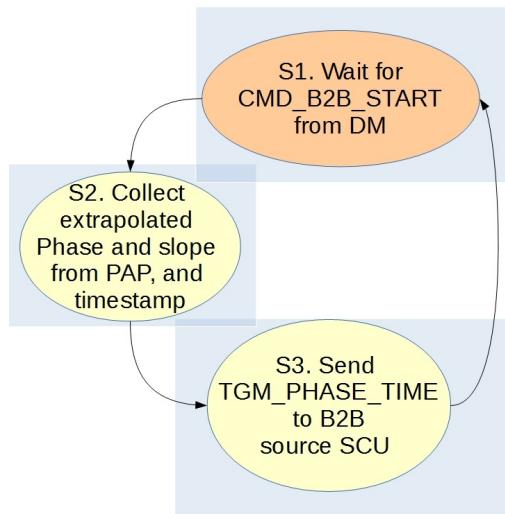


Figure 5.24: Flow chart of the firmware for the B2B target SCU.

“Step“ is represented as “S“ in the figure. The steps realized by the test setup are marked by the blue rectangle.

Fig. 5.24 shows the flow chart of the program of the B2B target SCU.

- Step 1. The program waits for the CMD\_START\_B2B timing frame.
- Step 2. When it receives the timing frame CMD\_START\_B2B, the program reads the extrapolated phase and the phase deviation slope from the PAP module, as well as the corresponding timestamp.
- Step 3. The program sends the TGM\_PHASE\_TIME timing frame to the B2B source SCU and goes back to the step 1.

- Firmware for the Trigger SCU

## 5.4. Test Setup for Data Collection, Merging and Redistribution

---

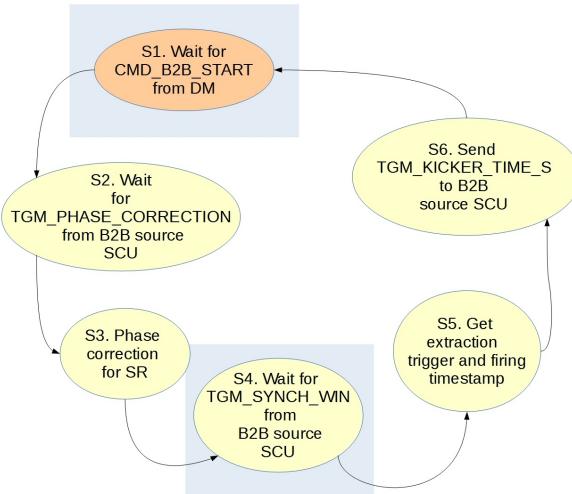


Figure 5.25: Flow chart of the firmware for the B2B Trigger SCU.

*“Step” is represented as “S” in the figure. The steps realized by the test setup are marked by the blue rectangle.*

Fig. 5.25 shows the flow chart of the program of the source Trigger SCU. For the target Trigger SCU, the flow chat is same only with the different name of the timing frame `TGM_KICKER_TIME_T`.

- Step 1. The program waits for the `CMD_START_B2B` timing frame.
- Step 2. The program waits for the `TGM_PHASE_CORRECTION` timing frame.
- Step 3. The program gives the phase correction value to the corresponding SR module for the bucket indication signal reproduction.
- Step 4. The program waits for the timing frame `CMD_SYNCH_WIN` to indicate the synchronization window for the kicker trigger.
- Step 5. After the beam extraction, the program collects the trigger and firing timestamp.
- Step 6. The program sends the `TGM_KICKER_TIME_S` timing frame to the B2B source SCU and goes back to the step 1.

### 5.4.4 Time Constraints

For the FAIR B2B transfer system, the time constraints are very important and strict. Because beam feedback loops are switched off before the B2B transfer, the beam is stable only for a period of time. For most FAIR use cases, the upper bound B2B transfer time is 10 ms.

Fig. 5.26 shows the time constraint of the system. The `CMD_START_B2B` is executed at  $t_{B2B}$ . The PAP module needs 500  $\mu$ s for the phase extrapolation, so the B2B source and target SCUs collect the extrapolated phase and the slope from the PAP module at  $t_{B2B} + 500 \mu\text{s}$ . The upper bound latency of the timing frame `TGM_PHASE_TIME` transfer on the WR network from the B2B target SCU to the B2B source SCU is 500  $\mu\text{s}$ , so the B2B source SCU receives the timing

## 5.4. Test Setup for Data Collection, Merging and Redistribution

---

frame TGM\_PHASE\_TIME at around  $t_{B2B} + 500 \mu s + 500 \mu s = t_{B2B} + 1 \text{ ms}$ . After that, the B2B source SCU needs about  $100 \mu s$  for the calculation, the sending of the timing frames TGM\_SYNCH\_WIN and TGM\_PHASE\_CORRECTION and the data transferring to the corresponding module. The timing frames TGM\_SYNCH\_WIN and TGM\_PHASE\_CORRECTION are sent by the B2B source SCU at around  $t_{B2B} + 1 \text{ ms} + 100 \mu s = t_{B2B} + 1.1 \text{ ms}$ . The upper bound latency of the timing frame transfer on the WR network from the B2B source SCU to the Trigger SCUs is  $500 \mu s$ , so the Trigger SCUs receives TGM\_PHASE\_CORRECTION and CMD\_SYNCH\_WIN at around  $t_{B2B} + 1.1 \text{ ms} + 500 \mu s = t_{B2B} + 1.6 \text{ ms}$ . The start of the synchronization window must be later than  $t_{B2B} + 1.1 \text{ ms} + 2 \cdot 500 \mu s = t_{B2B} + 2.1 \text{ ms}$ . Two upper bound latency of the WR network are caused by the timing frame TGM\_SYNCH\_WIN transfer from the B2B source SCU back to the DM and by the timing frame CMD\_SYNCH\_WIN transfer further from the DM to the BI devices. After bunches are transferred into buckets, there is no hard real time requirement for the Trigger SCU to collect the trigger and firing timestamps and to send the timing frame TGM\_KICKER\_TIME\_S, so  $1 \text{ ms}$  is used for the source Trigger SCU to do this task and the source Trigger SCU sends TGM\_KICKER\_TIME\_S at around  $t_{B2B} + 10 \text{ ms} + 1 \text{ ms} = t_{B2B} + 11 \text{ ms}$ . The same time constraints is also for the target Trigger SCU. The B2B source SCU receives TGM\_KICKER\_TIME\_S and TGM\_KICKER\_TIME\_T from the WR network at around  $t_{B2B} + 11 \text{ ms} + 500 \mu s = t_{B2B} + 11.5 \text{ ms}$ . The B2B source SCU uses  $100 \mu s$  to check the B2B transfer status and sends TGM\_B2B\_STATUS at around  $t_{B2B} + 11.5 \text{ ms} + 100 \mu s = t_{B2B} + 11.6 \text{ ms}$ . The BI devices receives the timing frame TGM\_B2B\_STATUS at around  $t_{B2B} + 11.6 \text{ ms} + 2 \cdot 500 \mu s = t_{B2B} + 12.6 \text{ ms}$ .  $2 \cdot 500 \mu s$  is two upper bound latency of the WR network, which is caused by the timing frame TGM\_B2B\_STATUS transfer from the B2B source SCU back to the DM and further from the DM to the BI devices.

## 5.4. Test Setup for Data Collection, Merging and Redistribution

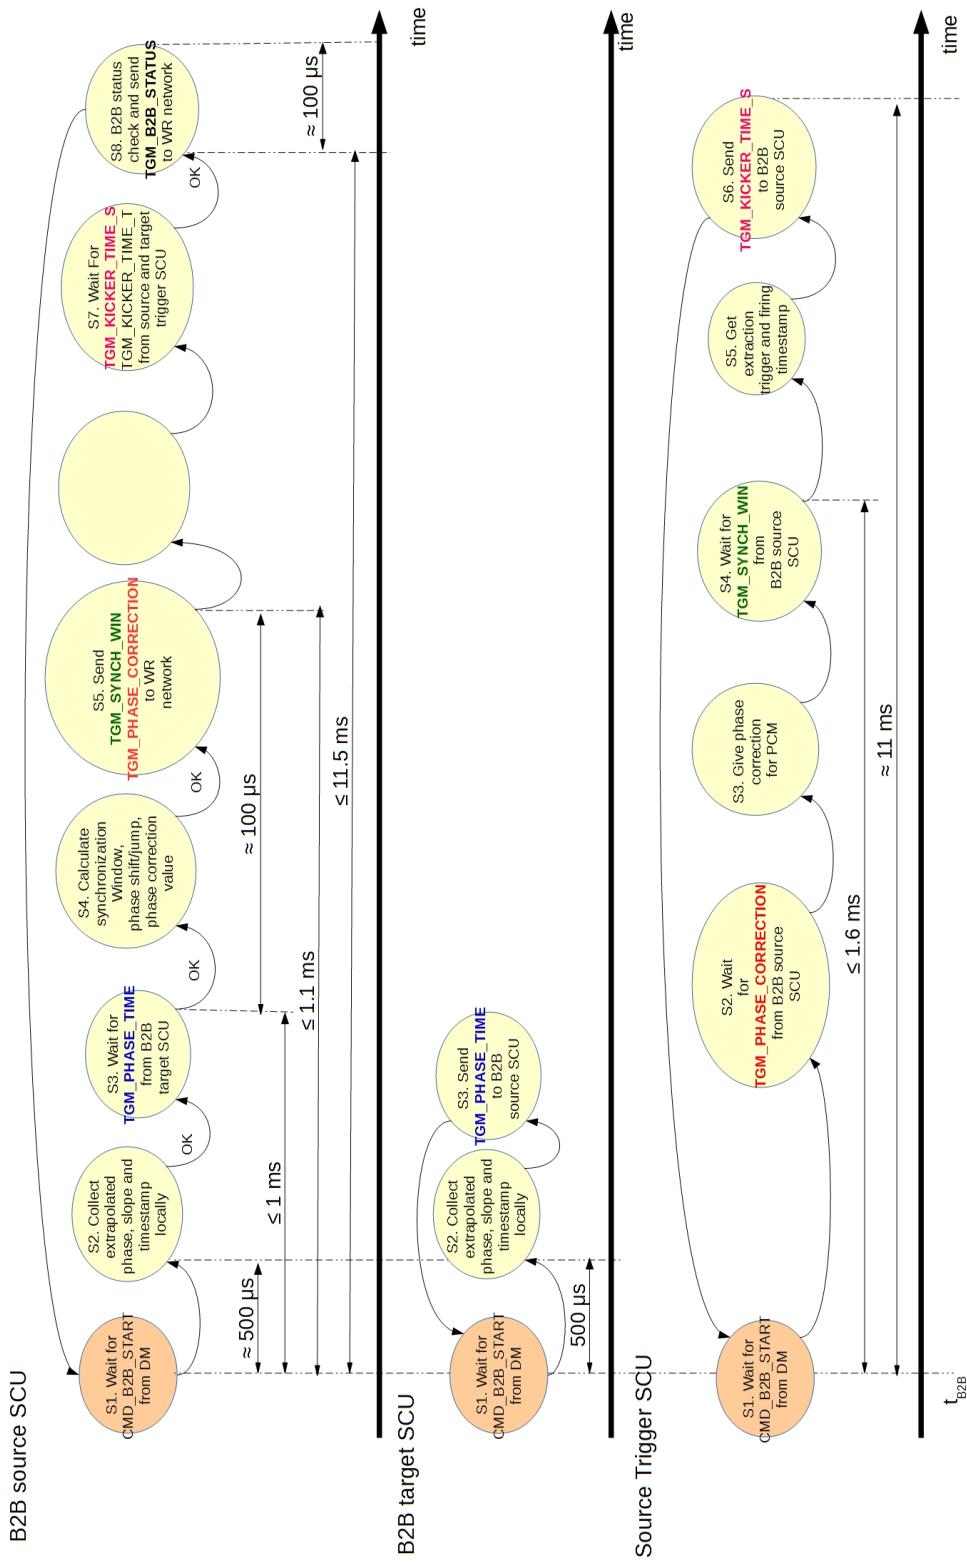


Figure 5.26: The time constraints of the B2B transfer system.

The sent and received timing frame pairs have the same color. (not drawn to accurate timescale)

## 5.4. Test Setup for Data Collection, Merging and Redistribution

### 5.4.5 Test Result

The steps with the blue rectangle in Fig. 5.26 are realized in this test setup. The test takes the  $U^{28+}$  B2B transfer from the SIS18 to the SIS100 with 200 Hz detuning on the SIS18 as an example. All timestamp are in the format of Greenwich Mean Time (GMT). The test result of the programs on the B2B source, B2B target and Trigger SCUs are shown as follows.

```
1 U28+ B2B transfer from SIS18 to SIS100 => B2B source SCU
2 -----
3
4 SIS18 phase measurement signal 1.572200MHz
5 SIS100 phase measurement signal 1.572000MHz
6 SIS18 period of phase measurement signal 636051(ps)
7 SIS100 period of phase measurement signal 636132(ps)
8
9 >>>>>>>> Receive CMD_START_B2B from WR network
10 Timestamp of the SIS18 phase measurement signal (accuracy to 1ns}
11 GMT: Thu, Jan 8, 1970, 21:07:27.445405856
12
13 >>>>>>>> Receive TGM_PHASE_TIME from WR network
14 Timestamp of the SIS100 phase measurement signal (accuracy to 1ns)
15 GMT: Thu, Jan 8, 1970, 21:07:27.445364560
16
17 Beating frequency: 200 Hz
18 Synchronization time: 4.622818 ms
19 The number of the period of SIS18 phase measurement signal for the
   synchronization: 7268
20 Start of the synchronization window: GMT: Thu, Jan 8, 1970,
   21:07:27.450028674
21
22 <<<<<<<<<< Send TGM_SYNCH_WIN to WR network
```

```
1 U28+ B2B transfer from SIS18 to SIS100 => B2B target SCU
2 -----
3
4 >>>>>>>> Receive CMD_START_B2B from WR network
5 Timestamp of the phase measurement signal from SIS100 (accuracy to 1ns)
6 GMT: Thu, Jan 8, 1970, 21:07:27.445364560
7
8 <<<<<<<<<< Send TGM_PHASE_TIME to WR network
```

```
1 U28+ B2B transfer from SIS18 to SIS100 => Trigger SCU
2 -----
3
4 Waiting for timing frames...
5 >>>>>>>>> Receive TGM_SYNCH_WIN from WR network
6 Event execution timestamp: GMT 1970-01-08 21:07:27.450028674
```

# Chapter 6

## Application of FAIR B2B Transfer System to FAIR Accelerators

For the FAIR B2B transfer system, both the phase shift and frequency beating methods are applicable. However, there is a constraint for many FAIR accelerator pairs to use the frequency beating method because of the non-integer ratio of the circumference between two ring accelerators. These pairs can also use the phase jump, a special phase shift without the adiabaticity consideration, on the target synchrotron to realize the synchronization, when there is no beam in the target synchrotron. When the ratio of the circumference between two ring accelerators is an integer, the phase shift method is preferred. In this chapter all FAIR use cases with the frequency beating method will be discussed in details. Based on the circumference ratio, there are three scenarios of the B2B transfer for FAIR.

- The circumference ratio between the large and small synchrotrons is an integer.
  - The B2B transfer from the SIS18 to the SIS100
- The circumference ratio between the large and small synchrotrons is close to an integer.
  - The B2B transfer from the SIS18 to the ESR<sup>1</sup>
  - The B2B transfer from the ESR<sup>2</sup> to the CRYRING
- The circumference ratio between the large and small synchrotrons is far away from an integer.
  - The B2B transfer from the CR to the HESR

Besides, FAIR has many use cases of B2B transfers that the extraction and injection beam have different energy because of targets installed between two ring accelerators (e.g. the Pbar target, the FRS and the Super FRS). Due to the energy loss at the target, the beam revolution frequency ratio between the small and large synchrotrons is used instead of the circumference ratio between the large and small synchrotrons. The revolution frequency ratio takes the energy loss into consideration. For FAIR, there exists the following scenario.

---

<sup>1</sup>Injection orbit

<sup>2</sup>Extraction orbit

## 6.1. Circumference Ratio is an Integer

---

- The revolution frequency ratio between the small and large synchrotrons is far away from an integer.
- The B2B transfer from the SIS100 to the CR via the Super FRS
- The B2B transfer from the SIS18 to the ESR via the FRS

Tab. 6.1 lists all FAIR use cases of the B2B transfer.  $m$ ,  $n$  and  $\kappa$  are integers.

Table 6.1: List of the FAIR B2B transfer use cases

Circumference ratio	$C^l/C^s$	$f_{rev}^s/f_{rev}^l$	Use cases of FAIR accelerators
$C^l/C^s = \kappa$ an integer	5		$U^{28+}$ B2B transfer from the SIS18 to the SIS100
	5		$H^+$ B2B transfer from the SIS18 to the SIS100
$C^l/C^s = \kappa + \lambda$ or $f_{rev}^s/f_{rev}^l = \kappa + \lambda$ close to an integer ( $ \lambda  \leq 0.005$ )	$2 - 0.003$		$h=4$ B2B transfer from the SIS18 to the ESR
	$2 - 0.003$		$h=1$ B2B transfer from the SIS18 to the ESR
	$2 + 0.003$		B2B transfer from the ESR to the CRYRING
$C^l/C^s = m/n + \lambda$ or $f_{rev}^s/f_{rev}^l$ $= m/n + \lambda$ far away from an integer ( $ \lambda  \leq 0.05$ )	not applicable	arbitrary	$H^+$ B2B transfer from the SIS100 to the CR via the Pbar target
	not applicable	arbitrary	Rare isotope beams (RIB) B2B transfer from the SIS100 to the CR via the Super FRS
	$2\frac{3}{5} - 0.003$		B2B transfer from the CR to the HESR
	not applicable	arbitrary	RIB B2B transfer from the SIS18 to the ESR via the FRS

## 6.1 Circumference Ratio is an Integer

When the circumference ratio of the large synchrotron to that of the small synchrotron is an integer, there exists the following relation between two cavity rf frequencies, see Chap. 2.

$$\frac{f_{rf}^l}{f_{rf}^s} = \frac{h_{rf}^l}{h_{rf}^s \cdot \kappa} \quad (6.1)$$

## 6.1. Circumference Ratio is an Integer

---

Two synchronization frequencies are

$$f_{syn}^l = \frac{f_{rf}^l}{h_{rf}^l/Y} = Y f_{rev}^l \quad (6.2)$$

$$f_{syn}^s = \frac{f_{rf}^s}{h_{rf}^s \kappa / Y} = \frac{Y}{\kappa} f_{rev}^s \quad (6.3)$$

$Y$  is the GCD of  $h_{rf}^l$  and  $h_{rf}^s \cdot \kappa$ . For more details, please see Sec. 2.2.1.

For the frequency beating method, two slightly different frequencies are chosen based on  $f_{syn}^l$  and  $f_{syn}^s$  by detuning  $\Delta f_{syn}$  on the rf system of the source synchrotron or that of the target synchrotron or that of both synchrotrons. Generally the rf system of the source synchrotron is preferred to be detuned, which is easy to be achieved during or after the acceleration ramp.

The frequency of the bucket indication signal depends on the relation between  $f_{syn}^{trg}$  and  $f_{rev}^{trg}$ , see Chap. 4. When the large synchrotron is the target, there exists  $f_{syn}^l = Y f_{rev}^l \geq f_{rev}^l$ . The revolution period is  $Y$  times as long as the period of  $f_{syn}^l$ . The period of  $f_{syn}^l$  is not long enough to contain all buckets. So  $f_{bucket} = f_{rev}^l$  and the length of the synchronization window  $T_w = T_{rev}^l$  for this case. Tab. 6.2 shows the formulas for the frequency of the bucket indication signal  $f_{bucket}$ , the synchronization frequencies  $f_{syn}^X$ , the frequencies of two phase measurement signals  $f_{B2B}^X$ , the frequency of the synchronization reference signal  $f_{ref}$ , the length of the synchronization window  $T_w$  and the bunch and bucket injection center mismatch  $\sigma_{rf}$  when the large synchrotron is the target. When the phase shift method is used,  $\Delta f_{syn} = 0$ .

Table 6.2: Parameters related to the B2B transfer when the circumference ratio is an integer and the large synchrotron is the target

	Large synchrotron is target synchrotron
$f_{bucket}$	$f_{rev}^l$
$f_{syn}^X$	$f_{syn}^s + \Delta f_{syn} = \frac{f_{rf}^s}{h_{rf}^s \kappa / Y} + \Delta f_{syn} = \frac{Y}{\kappa} f_{rev}^s + \Delta f_{syn}$ and $f_{syn}^l = \frac{f_{rf}^l}{h_{rf}^l / Y} = Y f_{rev}^l$
$f_{B2B}^X$	$f_{B2B}^s = \frac{h_{rf}^l}{h_{syn}^l} \cdot (f_{syn}^s + \Delta f_{syn}) = \frac{1}{\kappa} (f_{rev}^s + \frac{\kappa}{Y} \Delta f_{syn})$ and $f_{B2B}^l = f_{rev}^l$
$f_{ref}$	$round(f_{rev}^l / 100 \text{ kHz}) \cdot 100 \text{ kHz}$
$T_w$	$T_{rev}^l$
$\sigma_{rf}$	$\pm \frac{1}{2} \cdot 2\pi  f_{syn}^s - f_{syn}^l  \cdot T_w \cdot \frac{h_{rf}^l}{h_{syn}^l}$

When the small synchrotron is the target, the relation between  $f_{syn}^s = \frac{Y}{\kappa} f_{rev}^s$  and  $f_{rev}^s$  is not fixed. If  $f_{syn}^s \geq f_{rev}^s$ , namely  $\frac{Y}{\kappa} \geq 1$ , the revolution period is  $\frac{Y}{\kappa}$  times as long as the period of  $f_{syn}^s$ . Hence,  $f_{bucket} = f_{rev}^s$  and  $T_w = T_{rev}^s$  for this case. Oppositely, if  $f_{syn}^s < f_{rev}^s$ , namely  $\frac{Y}{\kappa} < 1$ , the period of  $f_{syn}^s$  is  $\frac{\kappa}{Y}$  times as long as the revolution period. Hence,  $f_{bucket} = f_{syn}^s$  and  $T_w = T_{syn}^s$ . Tab. 6.3 shows the formulas when the small synchrotron is the target. When the phase shift method is used,  $\Delta f_{syn} = 0$ .

## 6.1. Circumference Ratio is an Integer

---

Table 6.3: Parameters related to the B2B transfer when the circumference ratio is an integer and the small synchrotron is the target

	Small synchrotron is target synchrotron	
Case	(1) $f_{syn}^s \geq f_{rev}^s$ ( $\frac{Y}{\kappa} \geq 1$ )	(2) $f_{syn}^s < f_{rev}^s$ ( $\frac{Y}{\kappa} < 1$ )
$f_{bucket}$	$f_{rev}^s$	$f_{syn}^s$
$f_{syn}^X$	$f_{syn}^s + \Delta f_{syn} = \frac{f_{rf}^s}{h_{rf}^s \kappa / Y} + \Delta f_{syn} = \frac{Y}{\kappa} f_{rev}^s + \Delta f_{syn}$ and $f_{syn}^l = \frac{f_{rf}^l}{h_{rf}^l / Y} = Y f_{rev}^l$	
$f_{B2B}^X$	$f_{B2B}^l = \frac{h_{rev}^s}{h_{syn}^s} \cdot (f_{syn}^l + \Delta f_{syn}) = \kappa (f_{rev}^l + \frac{1}{Y} \Delta f_{syn})$ and $f_{B2B}^s = f_{rev}^s$	$f_{B2B}^l = f_{syn}^l + \Delta f_{syn} = Y (f_{rev}^l + \frac{1}{Y} \Delta f_{syn})$ and $f_{B2B}^s = f_{syn}^s = \frac{Y}{\kappa} f_{rev}^s$
$f_{ref}$	$round(f_{rev}^s / 100 \text{ kHz}) \cdot 100 \text{ kHz}$	$round(f_{syn}^s / 100 \text{ kHz}) \cdot 100 \text{ kHz}$
$T_w$	$T_{rev}^s$	$T_{syn}^s$
$\sigma_{rf}$	$\pm \frac{1}{2} \cdot 2\pi  f_{syn}^s - f_{syn}^l  \cdot T_w \cdot \frac{h_{rf}^s}{h_{syn}^s}$	

### 6.1.1 Use Case of $U^{28+}$ B2B Transfer from SIS18 to SIS100

The use case of the  $U^{28+}$  B2B transfer from the SIS18 to the SIS100 belongs to this scenario. Four batches of  $U^{28+}$  at 200 MeV/u are injected into continuous eight out of ten buckets of the SIS100. Each batch consists of two bunches [? ? ]. The large synchrotron is the SIS100 and the small one the SIS18.  $\kappa = 5$ ,  $h_{rf}^{SIS100} = 10$  and  $h_{rf}^{SIS18} = 2$ . The GCD of  $h_{rf}^{SIS100} = 10$  and  $h_{rf}^{SIS18} \cdot \kappa = 2 \cdot 5 = 10$  is 10, namely  $Y = 10$ . Substituting these values into eq. 6.1, we get

$$\frac{f_{rf}^{SIS100}}{f_{rf}^{SIS18}} = \frac{h_{rf}^{SIS100}}{h_{rf}^{SIS18} \cdot \kappa} = \frac{10}{2 \cdot 5} = \frac{10}{10} \quad (6.4)$$

Because the SIS100 is the large synchrotron and the target, substituting  $h_{rf}^X$ ,  $\kappa$ ,  $f_{rf}^X$ ,  $f_{rev}^X$  and  $Y$  into formulas in Tab. 6.2, the parameters related to the  $U^{28+}$  B2B transfer from the SIS18 to the SIS100 is obtained, see Tab. 6.4. Here we assume that the SIS18 is detuned with 200 Hz for the synchronization frequency  $f_{syn}^{SIS18}$ .

The goal time difference between the SIS18 and SIS100 rf systems equals to  $t_{v\_ext} + t_{v\_inj} + t_{TOF}$ , provided by the SM. The SIS100 revolution frequency works for the bucket indication. When the 1<sup>st</sup> and 2<sup>nd</sup> buckets are to be filled,  $t_{pattern} = 0$ . When the 3<sup>rd</sup> and 4<sup>th</sup> buckets are to be filled,  $t_{pattern} = T_{rev}^{SIS18}$ . When the 5<sup>th</sup> and 6<sup>th</sup> buckets are to be filled,  $t_{pattern} = 2 \cdot T_{rev}^{SIS18}$ . When the 7<sup>th</sup> and 8<sup>th</sup> buckets are to be filled,  $t_{pattern} = 3 \cdot T_{rev}^{SIS18}$ . Detailed parameters of the  $U^{28+}$  B2B transfer from the SIS18 to the SIS100, please see Appendix D.1.

### 6.1.2 Use Case of $H^+$ B2B Transfer from SIS18 to SIS100

Four batches of  $H^+$  at 4 GeV/u are injected into continuous four out of ten buckets of the SIS100. Each batch consists of one bunch [? ? ]. The large synchrotron is the SIS100 and the small one the SIS18.  $\kappa = 5$ ,  $h_{rf}^{SIS100} = 10$  and  $h_{rf}^{SIS18} = 1$ . The

---

<sup>3</sup>A Group DDS produces a given frequency with the mHz order of magnitude precision

## 6.1. Circumference Ratio is an Integer

---

Table 6.4: Parameters related to the  $U^{28+}$  B2B transfer from the SIS18 to the SIS100 with the frequency beating method

	Large synchrotron (SIS100) is target synchrotron
$f_{bucket}$	$f_{rev}^{SIS100} = 157.254 \text{ kHz}^3$
$f_{syn}^X$	$f_{syn}^{SIS18} = 2f_{rev}^{SIS18} = 1.572\,536 \text{ MHz} + 200 \text{ Hz}$ and $f_{syn}^{SIS100} = 10f_{rev}^{SIS100} = 1.572\,536 \text{ MHz}$
$f_{B2B}^X$	$f_{B2B}^{SIS18} = \frac{1}{5}(f_{rev}^{SIS18} + \frac{1}{2}\Delta f_{syn}) = 157.254 \text{ kHz} + 20 \text{ Hz}$ and $f_{B2B}^{SIS100} = f_{rev}^{SIS100} = 157.254 \text{ kHz}$
$f_{ref}$	200 kHz
$T_w$	$T_{rev}^{SIS100} = 6.359 \mu\text{s}$
$\sigma_{rf}$	$\pm 0.4^\circ$

GCD of  $h_{rf}^{SIS100} = 10$  and  $h_{rf}^{SIS18} \cdot \kappa = 1 \cdot 5$  is 5, namely  $Y = 5$ . Substituting these values into eq. 6.1, we get

$$\frac{f_{rf}^{SIS100}}{f_{rf}^{SIS18}} = \frac{h_{rf}^{SIS100}}{h_{rf}^{SIS18} \cdot \kappa} = \frac{10}{1 \cdot 5} = \frac{2}{1} \quad (6.5)$$

Because the SIS100 is the large synchrotron and the target, substituting  $h_{rf}^X$ ,  $\kappa$ ,  $f_{rf}^X$ ,  $f_{rev}^X$  and  $Y$  into formulas in Tab. 6.2, the parameters related to the  $H^+$  B2B transfer from the SIS18 to the SIS100 is obtained, see Tab. 6.5. Here we assume that the SIS18 is detuned with 200 Hz for the synchronization frequency  $f_{syn}^{SIS18}$ .

Table 6.5: Parameters related to the  $H^+$  B2B transfer from the SIS18 to the SIS100 with the frequency beating method

	Large synchrotron (SIS100) is target synchrotron
$f_{bucket}$	$f_{rev}^{SIS100} = 271.872 \text{ kHz}$
$f_{syn}^X$	$f_{syn}^{SIS18} = f_{rev}^{SIS18} = 1.359\,358 \text{ MHz} + 200 \text{ Hz}$ and $f_{syn}^{SIS100} = 5f_{rev}^{SIS100} = 1.359\,358 \text{ MHz}$
$f_{B2B}^X$	$f_{B2B}^{SIS18} = \frac{1}{5}(f_{rev}^{SIS18} + \Delta f_{syn}) = 271.872 \text{ kHz} + 40 \text{ Hz}$ and $f_{B2B}^{SIS100} = f_{rev}^{SIS100} = 271.872 \text{ kHz}$
$f_{ref}$	300 kHz
$T_w$	$T_{rev}^{SIS100} = 3.678 \mu\text{s}$
$\sigma_{rf}$	$\pm 0.4^\circ$

The SIS100 revolution frequency works for the bucket indication. In order to inject into the odd and even number buckets, there are two scenarios of the goal time difference between the SIS18 and SIS100 rf systems.

- Injection into odd number buckets

## 6.2. Circumference Ratio is close to an Integer

---

The goal time difference between the SIS18 and SIS100 rf systems equals to  $t_{v\_ext} + t_{v\_inj} + t_{TOF}$ . When the 1<sup>st</sup> bucket is to be filled,  $t_{pattern}=0$ . When the 3<sup>rd</sup> bucket is to be filled,  $t_{pattern} = 1 \cdot T_{rev}^{SIS18}$ .

- Injection into even number buckets

The goal time difference between the SIS18 and SIS100 rf systems equals to  $t_{v\_ext} + t_{v\_inj} + t_{TOF} - T_{rf}^{SIS100}$ . When the 2<sup>nd</sup> bucket is to be filled,  $t_{pattern} = 0$ . When the 4<sup>th</sup> bucket is to be filled,  $t_{pattern} = 1 \cdot T_{rev}^{SIS18}$ .

Detailed parameters of the  $H^+$  B2B transfer from the SIS18 to the SIS100, please see Appendix D.1.

## 6.2 Circumference Ratio is close to an Integer

When the circumference ratio of the large synchrotron to that of the small synchrotron is very close to an integer, there exists the relation between two cavity rf frequencies, see Chap. 2.

$$\frac{f_{rf}^l}{f_{rf}^s} = \frac{h_{rf}^l}{h_{rf}^s \cdot (\kappa + \lambda)} = \frac{h_{rf}^l}{h_{rf}^s \cdot \kappa + h_{rf}^s \cdot \lambda} \quad (6.6)$$

Besides, it is also grouped to this scenario, that the revolution frequency ratio between the small and large synchrotrons is close to an integer when the beam passes a target (e.g. the FRS, the Pbar target) between two ring accelerators. The ratio between two revolution frequencies can be expressed as

$$\frac{f_{rev}^s}{f_{rev}^l} = \kappa + \lambda \quad (6.7)$$

The relation between two cavity rf frequencies is same as eq. 6.6. Two synchronization frequencies are

$$f_{syn}^l = \frac{f_{rf}^l}{h_{rf}^l/Y} = Y f_{rev}^l \quad (6.8)$$

$$f_{syn}^s = \frac{f_{rf}^s}{h_{rf}^s \kappa / Y} = \frac{Y}{\kappa} f_{rev}^s \quad (6.9)$$

$Y$  is the GCD of  $h_{rf}^l$  and  $h_{rf}^s \cdot \kappa$ .

Two synchronization frequencies are beating automatically. The choice of the frequency for the bucket indication signal and the calculation of the synchronization window are similar as that of the integral circumference ratio scenario, see Sec. 6.1. Tab. 6.6 shows the formulas related to the B2B transfer when the large synchrotron is the target and Tab. 6.7 shows the formulas when the small synchrotron is the target.

## 6.2. Circumference Ratio is close to an Integer

---

Table 6.6: Parameters related to the B2B transfer when the circumference ratio is close to an integer and the large synchrotron is the target

	Large synchrotron is target synchrotron
$f_{bucket}$	$f_{rev}^l$
$f_{syn}^X$	$f_{syn}^s = \frac{f_{rf}^s}{(h_{rf}^s \cdot \kappa)/Y} = \frac{Y}{\kappa} f_{rev}^s$ and $f_{syn}^l = \frac{f_{rf}^l}{h_{rf}^l/Y} = Y f_{rev}^l$
$f_{B2B}^X$	$f_{B2B}^s = \frac{h_{rev}^l}{h_{syn}^l} \cdot f_{syn}^s = \frac{1}{\kappa} f_{rev}^s$ and $f_{B2B}^l = f_{rev}^l$
$f_{ref}$	$round(f_{rev}^l/100 \text{ kHz}) \cdot 100 \text{ kHz}$
$\Delta f$	$ f_{syn}^s - f_{syn}^l $
$T_w$	$T_{rev}^l$
$\sigma_{rf}$	$\pm \frac{1}{2} \cdot 2\pi  f_{syn}^s - f_{syn}^l  \cdot T_w \cdot \frac{h_{rf}^l}{h_{syn}^l}$

Table 6.7: Parameters related to the B2B transfer when the circumference ratio is close to an integer and the small synchrotron is the target

	Small synchrotron is target synchrotron	
Case	(1) $f_{syn}^s \geq f_{rev}^s$ ( $\frac{Y}{\kappa} \geq 1$ )	(2) $f_{syn}^s < f_{rev}^s$ ( $\frac{Y}{\kappa} < 1$ )
$f_{bucket}$	$f_{rev}^s$	$f_{syn}^s$
$f_{syn}^X$	$f_{syn}^s = \frac{f_{rf}^s}{(h_{rf}^s \cdot \kappa)/Y} = \frac{Y}{\kappa} f_{rev}^s$ and $f_{syn}^l = \frac{f_{rf}^l}{h_{rf}^l/Y} = Y f_{rev}^l$	
$f_{B2B}^X$	$f_{B2B}^l = \frac{h_{rev}^s}{h_{syn}^s} \cdot f_{syn}^l = \kappa f_{rev}^l$ and $f_{B2B}^s = f_{rev}^s$	$f_{B2B}^l = f_{syn}^l = Y f_{rev}^l$ and $f_{B2B}^s = f_{syn}^s = \frac{Y}{\kappa} f_{rev}^s$
$f_{ref}$	$round(f_{rev}^s/100 \text{ kHz}) \cdot 100 \text{ kHz}$	$round(f_{syn}^s/100 \text{ kHz}) \cdot 100 \text{ kHz}$
$\Delta f$	$ f_{syn}^s - f_{syn}^l $	
$T_w$	$T_{rev}^s$	$T_{syn}^s$
$\sigma_{rf}$	$\pm \frac{1}{2} \cdot 2\pi  f_{syn}^s - f_{syn}^l  \cdot T_w \cdot \frac{h_{rf}^s}{h_{syn}^s}$	

### 6.2.1 Use Case of h=4 B2B Transfer from SIS18 to ESR

Continuous two of four bunches are injected into two buckets of the injection orbit of the ESR [? ]. The beam is accumulated in the ESR. The large synchrotron is the SIS18 and the small one is the ESR.  $h_{rf}^{SIS18} = 4$  and  $h_{rf}^{ESR} = 2$ . The circumference ratio between the SIS18 and the ESR injection orbit is

$$\frac{C^l}{C^s} = \kappa + \lambda = 2 - 0.003 \quad (6.10)$$

The GCD of  $h_{rf}^{SIS18} = 4$  and  $h_{rf}^{ESR} \cdot \kappa = 2 \cdot 2 = 2$  is 4, namely  $Y = 4$ . Substituting  $h_{rf}^{SIS18}$ ,  $h_{rf}^{ESR}$ ,  $\kappa$  and  $\lambda$  into eq. 6.6, we get

$$\frac{f_{rf}^{SIS18}}{f_{rf}^{ESR}} = \frac{h_{rf}^{SIS18}}{h_{rf}^{ESR} \cdot (\kappa + \lambda)} = \frac{4}{2 \cdot (2 - 0.003)} \quad (6.11)$$

The ESR is the small synchrotron and the target and there exists  $Y/\kappa > 1$ , so

## 6.2. Circumference Ratio is close to an Integer

---

substituting  $h_{rf}^X$ ,  $\kappa$ ,  $\lambda$ ,  $f_{rf}^X$  and  $Y$  into formulas of the case (1) in Tab. 6.7, the parameters related to the  $h=4$  B2B transfer from the SIS18 to the ESR is obtained, see Tab. 6.8. Here we use the 30 MeV/u heavy ion B2B transfer as an example.

Table 6.8: Parameters related to the  $h=4$  B2B transfer from the SIS18 to the ESR with the frequency beating method

Small synchrotron (ESR) is target synchrotron	
$f_{bucket}$	$f_{rev}^{ESR} = 685.651 \text{ kHz}$
$f_{syn}^X$	$f_{syn}^{SIS18} = 4f_{rev}^{SIS18} = 1.373\,201 \text{ MHz}$ and $f_{syn}^{ESR} = 2f_{rev}^{ESR} = 1.371\,302 \text{ MHz}$
$f_{B2B}^X$	$f_{B2B}^{SIS18} = 2f_{rev}^{SIS18} = 686.601 \text{ kHz}$ and $f_{B2B}^{ESR} = f_{rev}^{ESR} = 685.651 \text{ kHz}$
$f_{ref}$	700 kHz
$\Delta f$	1899 Hz
$T_w$	$T_{rev}^{ESR} = 1.456 \mu\text{s}$
$\sigma_{rf}$	$\pm 0.5^\circ$

Detailed parameters of the  $h = 4$  B2B transfer from the SIS18 to the ESR, please see Appendix D.2. The goal time difference between the SIS18 and ESR rf systems equals to  $t_{v\_ext} + t_{v\_inj} + t_{TOF} - \frac{\theta}{2\pi} \frac{1}{f_{rf}^{ESR}}$ , where  $\theta$  depends on the accumulation method. E.g.  $\theta = \pi$ , when the unstable fixed point is used for the accumulation.

### 6.2.2 Use Case of $h=1$ B2B Transfer from SIS18 to ESR

One bunch is injected into one bucket of the injection orbit of the ESR. The beam is accumulated in the ESR. The large synchrotron is the SIS18 and the small one is the ESR.  $h_{rf}^{SIS18} = 1$  and  $h_{rf}^{ESR} = 1$ . The circumference ratio between the SIS18 and the ESR is

$$\frac{C^l}{C^s} = \kappa + \lambda = 2 - 0.003 \quad (6.12)$$

The GCD of  $h_{rf}^{SIS18} = 1$  and  $h_{rf}^{ESR} \cdot \kappa = 1 \cdot 2 = 2$  is 1, namely  $Y = 1$ . Substituting  $h_{rf}^{SIS18}$ ,  $h_{rf}^{ESR}$ ,  $\kappa$  and  $\lambda$  into eq. 6.6, we get

$$\frac{f_{rf}^{SIS18}}{f_{rf}^{ESR}} = \frac{h_{rf}^l}{h_{rf}^s \cdot (\kappa + \lambda)} = \frac{1}{1 \cdot (2 - 0.003)} \quad (6.13)$$

The ESR is the target and there exists  $Y/\kappa < 1$ , so substituting  $h_{rf}^X$ ,  $\kappa$ ,  $\lambda$ ,  $f_{rf}^X$  and  $Y$  into formulas of the case (2) in Tab. 6.7, the parameters related to the  $h=1$  B2B transfer from the SIS18 to the ESR is obtained, see Tab. 6.9. Here we use the 400 MeV/u proton B2B transfer as an example.

Detailed parameters of the  $h = 1$  B2B transfer from the SIS18 to the ESR, please see Appendix D.2. The goal time difference between the SIS18 and ESR rf systems equals to  $t_{v\_ext} + t_{v\_inj} + t_{TOF} - \frac{\theta}{2\pi} \frac{1}{f_{rf}^{ESR}}$ , where  $\theta$  depends on the accumulation method.

### 6.2.3 Use Case of B2B transfer from ESR to CRYRING

Only one bunch is injected into one bucket of the CRYRING [? ? ]. The large synchrotron is the ESR and the small one is the CRYRING.  $h_{rf}^{ESR} = 1$  and  $h_{rf}^{CRYRING} = 1$ .

## 6.2. Circumference Ratio is close to an Integer

---

Table 6.9: Parameters related to the h=1 B2B transfer from the SIS18 to the ESR with the frequency beating method

	Small synchrotron (ESR) is target synchrotron
$f_{bucket}$	$f_{syn}^{ESR} = 988.388 \text{ kHz}$
$f_{syn}^X$	$f_{syn}^{SIS18} = f_{rev}^{SIS18} = 989.756 \text{ kHz}$ and $f_{syn}^{ESR} = f_{rev}^{ESR}/2 = 988.388 \text{ kHz}$
$f_{B2B}^X$	$f_{B2B}^{SIS18} = f_{rev}^{SIS18} = 989.756 \text{ kHz}$ and $f_{B2B}^{ESR} = f_{rev}^{ESR}/2 = 988.388 \text{ kHz}$
$f_{ref}$	1 MHz
$\Delta f$	1368 Hz
$T_w$	$T_{syn}^{ESR} = 1.017 \mu\text{s}$
$\sigma_{rf}$	$\pm 0.5^\circ$

The circumference ratio between the ESR and the CRYRING is

$$\frac{C^l}{C^s} = \kappa + \lambda = 2 + 0.003 \quad (6.14)$$

The GCD of  $h_{rf}^{ESR} = 1$  and  $h_{rf}^{CRYRING} \cdot \kappa = 1 \cdot 2$  is 1, namely  $Y = 1$ . Substituting  $h_{rf}^{ESR}$ ,  $h_{rf}^{CRYRING}$ ,  $\kappa$  and  $\lambda$  into eq. 6.6, we get

$$\frac{f_{rf}^{ESR}}{f_{rf}^{CRYRING}} = \frac{h_{rf}^l}{h_{rf}^s \cdot (\kappa + \lambda)} = \frac{1}{1 \cdot (2 + 0.003)} \quad (6.15)$$

The CRYRING is the target and there exists  $Y/\kappa < 1$ , so substituting  $h_{rf}^X$ ,  $\kappa$ ,  $\lambda$ ,  $f_{rf}^X$  and  $Y$  into formulas of the case (2) in Tab. 6.7, the parameters related to the B2B transfer from the ESR to the CRYRING is obtained, see Tab. 6.10. Here we use the 30 MeV/u proton B2B transfer as an example.

Table 6.10: Parameters related to the B2B transfer from the ESR to the CRYRING with the frequency beating method

	Small synchrotron (CRYRING) is target synchrotron
$f_{bucket}$	$f_{syn}^{CRYRING} = 686.600 \text{ kHz}$
$f_{syn}^X$	$f_{syn}^{ESR} = f_{rev}^{ESR} = 685.651 \text{ kHz}$ and $f_{syn}^{CRYRING} = f_{rev}^{CRYRING}/2 = 686.600 \text{ kHz}$
$f_{B2B}^X$	$f_{B2B}^{ESR} = f_{rev}^{ESR} = 685.651 \text{ kHz}$ and $f_{B2B}^{CRYRING} = f_{rev}^{CRYRING}/2 = 686.600 \text{ kHz}$
$f_{ref}$	700 kHz
$\Delta f$	949 Hz
$T_w$	$T_{syn}^{CRYRING} = 1.456 \mu\text{s}$
$\sigma_{rf}$	$\pm 0.5^\circ$

The CRYRING synchronization frequency works for the bucket indication. The goal time difference between the ESR and CRYRING rf systems equals to  $t_{v\_ext} +$

### 6.3. Circumference Ratio is far away from an Integer

---

$t_{v,inj} + t_{TOF}$ . Detailed parameters of the B2B transfer from the ESR to the CRYRING, please see Appendix D.4.

## 6.3 Circumference Ratio is far away from an Integer

When the circumference ratio of the large synchrotron to that of the small synchrotron is far away from an integer, there exists the relation between two cavity rf frequencies, see Chap. 2.

$$\frac{f_{rf}^l}{f_{rf}^s} = \frac{h_{rf}^l \cdot n}{h_{rf}^s \cdot m + h_{rf}^s \cdot \lambda \cdot n} \quad (6.16)$$

Besides, it is also grouped to this scenario, that the revolution frequency ratio between the small and large synchrotrons is far away from an integer when the beam passes a target between two ring accelerators. The revolution frequency ratio can be expressed as

$$\frac{f_{rev}^s}{f_{rev}^l} = \frac{m}{n} + \lambda \quad (6.17)$$

The relation between two cavity rf frequencies is same as eq. 6.16. Two synchronization frequencies are

$$f_{syn}^l = \frac{f_{rf}^l}{h_{rf}^l n / Y} = \frac{Y}{n} f_{rev}^l \quad (6.18)$$

$$f_{syn}^s = \frac{f_{rf}^s}{h_{rf}^s m / Y} = \frac{Y}{m} f_{rev}^s \quad (6.19)$$

$Y$  is the GCD of  $h_{rf}^l \cdot n$  and  $h_{rf}^s \cdot m$ .

Two synchronization frequencies are beating automatically. When the large synchrotron is the target, the frequency of the bucket indication signal depends on the relation between  $f_{syn}^l$  and  $f_{rev}^l$ . When  $f_{syn}^l \geq f_{rev}^l$ , namely  $\frac{Y}{n} \geq 1$ ,  $f_{bucket} = f_{rev}^s$ . When  $f_{syn}^l < f_{rev}^l$ ,  $f_{bucket} = f_{syn}^l$ . Tab. 6.11 shows the formulas related to the B2B transfer when the large synchrotron is the target.

When the small synchrotron is the target, the frequency of the bucket indication signal depends on the relation between  $f_{syn}^s$  and  $f_{rev}^s$ . When  $f_{syn}^s \geq f_{rev}^s$ , namely  $\frac{Y}{m} \geq 1$ ,  $f_{bucket} = f_{rev}^s$ . When  $f_{syn}^s < f_{rev}^s$ ,  $f_{bucket} = f_{syn}^s$ . Tab. 6.12 shows the formulas related to the B2B transfer when the small synchrotron is the target.

### 6.3.1 Use Case of $H^+$ B2B Transfer from SIS100 to CR

After the injection into the SIS100, four bunches are merged into one by the harmonic 5. This bunch is extracted from the SIS100 and goes to the Pbar target, then antiprotons are produced and injected into one bucket of the CR [? ]. The large synchrotron is the SIS100 and the small one is the CR,  $h_{rf}^{SIS100} = 5$  and  $h_{rf}^{CR} = 1$ . Here we take an example, that the proton energy before the Pbar is 28.8 GeV/u and the antiproton energy after the Pbar is 3 GeV/u. Substituting the extraction and injection revolution frequencies into eq. 6.17, we get

$$\frac{f_{rev}^{CR}}{f_{rev}^{SIS100}} = 4.8 - 0.041 = \frac{m}{n} + \lambda = \frac{24}{5} - 0.041 \quad (6.20)$$

### 6.3. Circumference Ratio is far away from an Integer

---

Table 6.11: Parameters related to the B2B transfer when the circumference ratio is far away from an integer and the large synchrotron is the target

	Large synchrotron is target synchrotron	
Case	(1) $f_{syn}^l \geq f_{rev}^l (\frac{Y}{n} \geq 1)$	(2) $f_{syn}^l < f_{rev}^l (\frac{Y}{n} < 1)$
$f_{bucket}$	$f_{rev}^l$	$f_{syn}^l$
$f_{syn}^X$	$f_{syn}^s = \frac{f_{rf}^s}{(h_{rf}^s \cdot m)/Y} = \frac{Y}{m} f_{rev}^s$ and $f_{syn}^l = \frac{f_{rf}^l}{(h_{rf}^l \cdot n)/Y} = \frac{Y}{n} f_{rev}^l$	
$f_{B2B}^X$	$f_{B2B}^s = \frac{h_{rev}^l}{h_{syn}^l} \cdot f_{syn}^s = \frac{n}{m} f_{rev}^s$ and $f_{B2B}^l = f_{rev}^l$	$f_{B2B}^s = f_{syn}^s = \frac{Y}{m} f_{rev}^s$ and $f_{B2B}^l = f_{syn}^l = \frac{Y}{n} f_{rev}^l$
$f_{ref}$	$round(f_{rev}^l / 100 \text{ kHz}) \cdot 100 \text{ kHz}$	$round(f_{syn}^l / 100 \text{ kHz}) \cdot 100 \text{ kHz}$
$\Delta f$	$ f_{syn}^l - f_{syn}^s $	
$T_w$	$T_{rev}^l$	$T_{syn}^l$
$\sigma_{rf}$	$\pm \frac{1}{2} \cdot 2\pi  f_{syn}^s - f_{syn}^l  \cdot T_w \cdot \frac{h_{rf}^l}{h_{syn}^l}$	

Table 6.12: Parameters related to the B2B transfer when the circumference ratio is far away from an integer and the small synchrotron is the target

	Small synchrotron is target synchrotron	
Case	(1) $f_{syn}^s \geq f_{rev}^s (\frac{Y}{m} \geq 1)$	(2) $f_{syn}^s < f_{rev}^s (\frac{Y}{m} < 1)$
$f_{bucket}$	$f_{rev}^s$	$f_{syn}^s$
$f_{syn}^X$	$f_{syn}^s = \frac{f_{rf}^s}{(h_{rf}^s \cdot m)/Y} = \frac{Y}{m} f_{rev}^s$ and $f_{syn}^l = \frac{f_{rf}^l}{(h_{rf}^l \cdot n)/Y} = \frac{Y}{n} f_{rev}^l$	
$f_{B2B}^X$	$f_{B2B}^s = f_{rev}^s$ and $f_{B2B}^l = \frac{h_{rev}^s}{h_{syn}^s} \cdot f_{syn}^l = \frac{m}{n} f_{rev}^l$	$f_{B2B}^s = f_{syn}^s = \frac{Y}{m} f_{rev}^s$ and $f_{B2B}^l = f_{syn}^l = \frac{Y}{n} f_{rev}^l$
$f_{ref}$	$round(f_{rev}^s / 100 \text{ kHz}) \cdot 100 \text{ kHz}$	$round(f_{syn}^s / 100 \text{ kHz}) \cdot 100 \text{ kHz}$
$\Delta f$	$ f_{syn}^s - f_{syn}^l $	
$T_w$	$T_{rev}^s$	$T_{syn}^s$
$\sigma_{rf}$	$\pm \frac{1}{2} \cdot 2\pi  f_{syn}^s - f_{syn}^l  \cdot T_w \cdot \frac{h_{rf}^s}{h_{syn}^s}$	

The GCD of  $h_{rf}^{SIS100} \cdot n = 5 \cdot 5 = 25$  and  $h_{rf}^{CR} \cdot m = 1 \cdot 24 = 24$  is 1, namely  $Y = 1$ . Substituting  $h_{rf}^{SIS100}$ ,  $h_{rf}^{CR}$ , m, n and  $\lambda$  into eq. 6.16, we get

$$\frac{f_{rf}^{SIS100}}{f_{rf}^{CR}} = \frac{h_{rf}^{SIS100} \cdot n}{h_{rf}^{CR} \cdot m + h_{rf}^{CR} \cdot \lambda \cdot n} = \frac{5 \cdot 5}{1 \cdot 24 - 1 \cdot 0.041 \cdot 5} \quad (6.21)$$

The CR is the small synchrotron and the target and there exists  $\frac{Y}{m} = 1/24 < 1$ , so substituting  $h_{rf}^X$ , m, n,  $\lambda$ ,  $f_{rf}^X$  and Y into formulas of the case (2) in Tab. 6.12, the parameters related to the  $H^+$  B2B transfer from the SIS100 to the CR is obtained, see Tab. 6.13.

There exists an inevitable big bunch-to-bucket injection center mismatch with the frequency beating method. Other B2B injection mechanism should be used for

### 6.3. Circumference Ratio is far away from an Integer

---

Table 6.13: Parameters related to the  $H^+$  B2B transfer from the SIS100 to the CR with the frequency beating method

	Small synchrotron (CR) is target synchrotron
$f_{bucket}$	$f_{syn}^{CR} = 54.866 \text{ kHz}$
$f_{syn}^X$	$f_{syn}^{SIS100} = f_{rev}^{SIS100}/5 = 55.340 \text{ kHz}$ and $f_{syn}^{CR} = f_{rev}^{CR}/24 = 54.866 \text{ kHz}$
$f_{B2B}^X$	$f_{B2B}^{SIS100} = f_{rev}^{SIS100}/5 = 55.340 \text{ kHz}$ and $f_{B2B}^{CR} = f_{rev}^{CR}/24 = 54.866 \text{ kHz}$
$f_{ref}$	100 kHz
$\Delta f$	526 Hz
$T_w$	$T_{syn}^{CR} = 18.226 \mu\text{s}$
$\sigma_{rf}$	$\pm 41.5^\circ$

the transfer (e.g. the phase jump for the CR), which is beyond the scope of this dissertation. Detailed parameters of the  $H^+$  B2B transfer from the SIS100 to the CR, please see Appendix D.6.

#### 6.3.2 Use Case of RIB B2B Transfer from SIS100 to CR

After the injection into the SIS100, eight bunches are merged into one by the harmonic 2. This bunch is extracted from the SIS100 and goes to the Super FRS, then the RIB is produced and injected into one bucket of the CR. The large synchrotron is the SIS100 and the small one is the CR.  $h_{rf}^{SIS100} = 2$  and  $h_{rf}^{CR} = 1$ . Here we take an example, that the energy of the heavy ion beam before the Super FRS is 1.5 GeV/u and the RIB energy after the Super FRS is 740 MeV/u. Substituting the extraction and injection revolution frequencies into eq. 6.17, we get

$$\frac{f_{rev}^{CR}}{f_{rev}^{SIS100}} = 4.4 - 0.0046 = \frac{m}{n} + \lambda = \frac{22}{5} - 0.0046 \quad (6.22)$$

Substituting  $h_{rf}^{SIS100}$ ,  $h_{rf}^{CR}$ , m, n and  $\lambda$  into eq. 6.16, we get

$$\frac{f_{rf}^{SIS100}}{f_{rf}^{CR}} = \frac{h_{rf}^{SIS100} \cdot n}{h_{rf}^{CR} \cdot m + h_{rf}^{CR} \cdot \lambda \cdot n} = \frac{2 \cdot 5}{1 \cdot 22 - 1 \cdot 0.0046 \cdot 5} \quad (6.23)$$

The GCD of  $h_{rf}^{SIS100} \cdot n = 2 \cdot 5 = 10$  and  $h_{rf}^{CR} \cdot m = 1 \cdot 22 = 22$  is 2, namely  $Y = 2$ . the CR is the small synchrotron and the target and there exists  $\frac{Y}{m} = 1/11 < 1$ , so substituting  $h_{rf}^X$ , m, n,  $\lambda$ ,  $f_{rf}^X$  and Y into formulas of the case (2) in Tab. 6.12, the parameters related the RIB B2B transfer from the SIS100 to the CR is obtained, see Tab. 6.14.

Detailed parameters of RIB B2B transfer from the SIS100 to the CR, please see Appendix D.6.

#### 6.3.3 Use Case of B2B Transfer from CR to HESR

One bunch of the CR is injected into one bucket of the HESR. The beam is accumulated in the HESR [? ]. The large synchrotron is the HESR and the small one is

### 6.3. Circumference Ratio is far away from an Integer

---

Table 6.14: Parameters related to the RIB B2B transfer from the SIS100 to the CR with the frequency beating method

	Small synchrotron (CR) is target synchrotron
$f_{bucket}$	$f_{syn}^{CR} = 102.218 \text{ kHz}$
$f_{syn}^X$	$f_{syn}^{SIS100} = 2f_{rev}^{SIS100}/5 = 102.326 \text{ kHz}$ and $f_{syn}^{CR} = f_{rev}^{CR}/11 = 102.218 \text{ kHz}$
$f_{B2B}^X$	$f_{B2B}^{SIS100} = 2f_{rev}^{SIS100}/5 = 102.326 \text{ kHz}$ and $f_{B2B}^{CR} = f_{rev}^{CR}/11 = 102.218 \text{ kHz}$
$f_{ref}$	100 kHz
$\Delta f$	108 Hz
$T_w$	$T_{syn}^{CR} = 9.779 \mu\text{s}$
$\sigma_{rf}$	$\pm 2.1^\circ$

the CR.  $h_{rf}^{HESR} = 1$  and  $h_{rf}^{CR} = 1$ . The circumference ratio between the HESR and the CR is

$$\frac{C^{HESR}}{C^{CR}} = 2.6 - 0.003 = \frac{m}{n} + \lambda = \frac{13}{5} - 0.003 \quad (6.24)$$

The GCD of  $h_{rf}^{HESR} \cdot n = 1 \cdot 5 = 5$  and  $h_{rf}^{CR} \cdot m = 1 \cdot 13 = 13$  is 1, namely  $Y = 1$ . Substituting  $h_{rf}^{HESR}$ ,  $h_{rf}^{CR}$ , m, n and  $\lambda$  into eq. 6.16, we get

$$\frac{f_{rf}^{HESR}}{f_{rf}^{CR}} = \frac{h_{rf}^{HESR} \cdot n}{h_{rf}^{CR} \cdot m + h_{rf}^{HESR} \cdot \lambda \cdot n} = \frac{1 \cdot 5}{1 \cdot 13 - 1 \cdot 0.003 \cdot 5} \quad (6.25)$$

The HESR is the large synchrotron and the target and there exists  $\frac{Y}{n} = 1/5 < 1$ , so substituting  $h_{rf}^X$ , m, n,  $\lambda$ ,  $f_{rf}^X$  and Y into formulas of the case (2) in Tab. 6.11, the parameters related to the B2B transfer from the CR to the HESR is obtained. Tab. 6.15 shows parameters of two operations, the antiproton and RIB B2B transfer.

The goal time difference between the two rf systems depends on the accumulation method. Detailed parameter about the B2B transfer from the CR to the HESR, please see Appendix D.5.

#### 6.3.4 Use Case of RIB B2B Transfer from SIS18 to ESR via the FRS

Only one bunch is extracted from the SIS18 and goes to the FRS, then a RIB is produced and injected into one bucket of the ESR. The large synchrotron is the SIS18 and the small one is the ESR.  $h_{rf}^{SIS18} = 1$  and  $h_{rf}^{ESR} = 1$ . Here we take an applied case as an example, that the energy of the heavy ion beam before the FRS is 550 MeV/u and the RIB energy after the FRS is 400 MeV/u. Substituting the extraction and injection revolution frequencies into eq. 6.17, we get

$$\frac{f_{rev}^{ESR}}{f_{rev}^{SIS18}} = 1.8 + 0.036 = \frac{m}{n} + \lambda = \frac{9}{5} + 0.036 \quad (6.26)$$

Substituting  $h_{rf}^{SIS18}$ ,  $h_{rf}^{ESR}$ , m, n and  $\lambda$  into eq. 6.16, we get

$$\frac{f_{rf}^{SIS18}}{f_{rf}^{ESR}} = \frac{h_{rf}^{SIS18} \cdot n}{h_{rf}^{ESR} \cdot m + h_{rf}^{ESR} \cdot \lambda \cdot n} = \frac{1 \cdot 5}{1 \cdot 9 + 1 \cdot 0.036 \cdot 5} \quad (6.27)$$

### 6.3. Circumference Ratio is far away from an Integer

---

Table 6.15: Parameters related to the B2B transfer from the CR to the HESR with the frequency beating method

	Larger synchrotron (HESR) is target synchrotron
	3 GeV/u antiproton
$f_{bucket}$	$f_{syn}^{HESR} = 101.426 \text{ kHz}$
$f_{syn}^X$	$f_{syn}^{CR} = f_{rev}^{CR}/13 = 101.290 \text{ kHz}$ and $f_{syn}^{HESR} = f_{rev}^{HESR}/5 = 101.426 \text{ kHz}$
$f_{B2B}^X$	$f_{B2B}^{CR} = f_{rev}^{CR}/13 = 101.290 \text{ kHz}$ and $f_{B2B}^{HESR} = f_{rev}^{HESR}/5 = 101.426 \text{ kHz}$
$f_{ref}$	100 kHz
$\Delta f$	136 Hz
$T_w$	$T_{syn}^{HESR} = 9.860 \mu\text{s}$
$\sigma_{rf}$	$\pm 1.2^\circ$
	740 MeV/u RIB
$f_{bucket}$	$f_{syn}^{HESR} = 86.608 \text{ kHz}$
$f_{syn}^X$	$f_{syn}^{CR} = f_{rev}^{CR}/13 = 86.493 \text{ kHz}$ and $f_{syn}^{HESR} = f_{rev}^{HESR}/5 = 86.608 \text{ kHz}$
$f_{B2B}^X$	$f_{B2B}^{CR} = f_{rev}^{CR}/13 = 86.493 \text{ kHz}$ and $f_{B2B}^{HESR} = f_{rev}^{HESR}/5 = 86.608 \text{ kHz}$
$f_{ref}$	100 kHz
$\Delta f$	113 Hz
$T_w$	$T_{syn}^{HESR} = 11.545 \mu\text{s}$
$\sigma_{rf}$	$\pm 1.2^\circ$

The GCD of  $h_{rf}^{SIS18} \cdot n = 1 \cdot 5 = 5$  and  $h_{rf}^{ESR} \cdot m = 1 \cdot 9 = 9$  is 1, namely  $Y = 1$ . The ESR is the small synchrotron and the target and there exists  $\frac{Y}{m} = 1/9 < 1$ , so substituting  $h_{rf}^X$ ,  $m$ ,  $n$ ,  $\lambda$ ,  $f_{rf}^X$  and  $Y$  into formulas into formulas of the case (2) in Tab. 6.12, the parameters related to the B2B transfer from the SIS18 to the ESR via the FRS is obtained, see Tab. 6.16.

Table 6.16: Parameters related to an applied case of the B2B transfer from the SIS18 to the ESR via the FRS with the frequency beating method

	Small synchrotron (ESR) is target synchrotron
$f_{bucket}$	$f_{syn}^{ESR} = 219.642 \text{ kHz}$
$f_{syn}^X$	$f_{syn}^{SIS18} = f_{rev}^{SIS18}/5 = 215.393 \text{ kHz}$ and $f_{syn}^{ESR} = f_{rev}^{ESR}/9 = 219.642 \text{ kHz}$
$f_{B2B}^X$	$f_{B2B}^{SIS18} = f_{rev}^{SIS18}/5 = 215.393 \text{ kHz}$ and $f_{B2B}^{ESR} = f_{rev}^{ESR}/9 = 219.642 \text{ kHz}$
$f_{ref}$	200 kHz
$\Delta f$	4249 Hz
$T_w$	$T_{syn}^{ESR} = 4.553 \mu\text{s}$
$\sigma_{rf}$	$\pm 31.2^\circ$

There exists an inevitable big bunch-to-bucket injection center mismatch with the frequency beating method. Other B2B injection mechanism should be used for the transfer (e.g. the phase jump for the ESR or the coasting beam injection), which is beyond the scope of this dissertation. More parameters about the B2B transfer from the SIS18 to the ESR via the FRS, please see Appendix ??.

## **6.4 Summary of Formulas related to B2B Transfer**

In this section, all the formulas are summarized. Tab. 6.17 summarizes the formulas related to the B2B transfer when the large synchrotron is the target. Tab. 6.18 summarizes the formulas when the small synchrotron is the target and the revolution period is longer than the period of the synchronization frequency of the target synchrotron. Tab. 6.19 summarizes the formulas when the small synchrotron is the target and the revolution period is shorter than the period of the synchronization frequency of the target synchrotron.

## 6.4. Summary of Formulas related to the B2B Transfer

---

Table 6.17: Summary of the formulas related to the B2B transfer when the large synchrotron is the target

Circumference ratio	Cavity rf frequency ratio $f_{rf}^l / f_{rf}^s$	Bucket indication signal $f_{bucket}$	Synchronization frequencies $f_{syn}^X$	phase measurement signal $f_{B2B}^X$
$C^l / C^s = \kappa$ Integer	$\frac{h_{rf}^l}{h_{rf}^s \cdot \kappa}$ Y=GCD( $h_{rf}^l, h_{rf}^s \cdot \kappa$ )	$f_{rev}^l$	$f_{syn}^s = \frac{Y}{\kappa} f_{rev}^s$ and $f_{syn}^l = Y f_{rev}^l$	$f_{B2B}^s = \frac{1}{\kappa} (f_{rev}^s + \frac{\kappa}{Y} \Delta f_{syn})$ and $f_{B2B}^l = f_{rev}^l$
$C^l / C^s = \kappa + \lambda$ or $f_{rev}^s / f_{rev}^l = \kappa + \lambda$ close to integer	$\frac{h_{rf}^l}{h_{rf}^s \cdot (\kappa + \lambda)}$ Y=GCD( $h_{rf}^l, h_{rf}^s \cdot (\kappa + \lambda)$ )	$f_{rev}^l$	$\Delta f = \Delta f_{syn}^s$ $f_{syn}^l = Y f_{rev}^l$ and $f_{syn}^s = \frac{Y}{\kappa} f_{rev}^s$	$f_{B2B}^s = \frac{1}{\kappa} f_{rev}^s$ and $f_{B2B}^l = f_{rev}^l$
$C^l / C^s = m/n + \lambda$ or $f_{rev}^s / f_{rev}^l = m/n + \lambda$ far away from integer	$\frac{h_{rf}^l}{h_{rf}^s \cdot (m/n + \lambda)}$ Y=GCD( $h_{rf}^l \cdot n, h_{rf}^s \cdot m$ )		$\Delta f =  f_{syn}^l - f_{syn}^s $  $f_{syn}^l = \frac{Y}{n} f_{rev}^l$ and $f_{syn}^s = \frac{Y}{m} f_{rev}^s$  $\Delta f =  f_{syn}^l - f_{syn}^s $  $f_{B2B}^s = \frac{Y}{m} f_{rev}^s$ and $f_{B2B}^l = \frac{Y}{n} f_{rev}^l$	$f_{B2B}^s = \frac{n}{m} f_{rev}^s$ and $f_{B2B}^l = f_{rev}^l$  $f_{B2B}^s = \frac{Y}{m} f_{rev}^s$ and $f_{B2B}^l = \frac{Y}{n} f_{rev}^l$

Note:  $f_{ref} = round(f_{B2B}^{trg} / 100 \text{ kHz}) \cdot 100 \text{ kHz}$ ,  $T_w = 1 / f_{bucket}$  and  $\sigma_{rf} = \pm \frac{1}{2} \cdot 2\pi |f_{syn}^s - f_{syn}^l| \cdot T_w \cdot \frac{h_{rf}^l}{h_{syn}^l}$

## 6.4. Summary of Formulas related to B2B Transfer

---

Table 6.18: Summary of the formulas related to the B2B transfer when the small synchrotron is the target and the revolution period is longer than the period of the synchronization frequency of the target synchrotron

Circumference ratio	Cavity rf frequency ratio $f_{rf}^l / f_{rf}^s$	Bucket indication signal $f_{bucket}$	Synchronization frequencies $f_{syn}^X$	phase measurement signal $f_{B2B}^X$
$C^l/C^s = \kappa$ Integer	$\frac{h_{rf}^l}{h_{rf}^s \cdot \kappa}$	$Y/\kappa \geq 1, f_{rev}^s$	$f_{syn}^l = Y f_{rev}^l$ and $f_{syn}^s = \frac{Y}{\kappa} f_{rev}^s$	$f_{B2B}^l = \kappa(f_{rev}^l + \frac{1}{Y} \Delta f_{syn})$ and $f_{B2B}^s = f_{rev}^s$
$C^l/C^s = \kappa + \lambda$ or $f_{rev}^s/f_{rev}^l = \kappa + \lambda$ close to integer	$\frac{h_{rf}^l}{h_{rf}^{s \cdot (\kappa+\lambda)}}$	$Y/\kappa \geq 1, f_{rev}^s$	$\Delta f = \Delta f_{syn}$	$f_{syn}^l = Y f_{rev}^l$ and $f_{syn}^s = \frac{Y}{\kappa} f_{rev}^s$
$C^l/C^s = m/n + \lambda$ or $f_{rev}^s/f_{rev}^l = m/n + \lambda$ far away from integer	$\frac{h_{rf}^l}{h_{rf}^{s \cdot (m/n+\lambda)}}$	$Y/m \geq 1, f_{rev}^s$	$\Delta f =  f_{syn}^l - f_{syn}^s $	$f_{B2B}^l = \frac{m}{n} f_{rev}^l$ and $f_{B2B}^s = \frac{m}{n} f_{rev}^s$
<i>Note:</i> $f_{ref} = round(f_{B2B}^{trg} / 100 \text{ kHz}) \cdot 100 \text{ kHz}$ , $T_w = 1/f_{bucket}$ and $\sigma_{rf} = \pm \frac{1}{2} \cdot 2\pi  f_{syn}^s - f_{syn}^l  \cdot T_w \cdot \frac{h_{rf}^s}{h_{syn}^s}$				

Table 6.19: Summary of the formulas related to the B2B transfer when the small synchrotron is the target and the revolution period is shorter than the period of the synchronization frequency of the target synchrotron

Circumference ratio	Cavity rf frequency ratio $f_{rf}^l/f_{rf}^s$	Bucket indication signal $f_{bucket}$	Synchronization frequencies $f_{syn}^X$	phase measurement signal $f_{B2B}^X$
$C^l/C^s = \kappa$ Integer	$\frac{h_{rf}^l}{h_{rf}^s \cdot \kappa}$	$Y/\kappa < 1, f_{syn}^s$	$f_{syn}^l = Y f_{rev}$ and $f_{syn}^s = \frac{Y}{\kappa} f_{rev}$	$f_{B2B}^l = Y(f_{rev}^l + \frac{1}{Y} \Delta f_{syn})$ and $f_{B2B}^s = \frac{Y}{\kappa} f_{rev}^s$
$C^l/C^s = \kappa + \lambda$ or $f_{rev}^s/f_{rev}^l = \kappa + \lambda$ close to integer	$\frac{h_{rf}^l}{h_{rf}^s \cdot (\kappa+\lambda)}$	$Y/\kappa < 1, f_{syn}^s$	$\Delta f = \Delta f_{syn}$ $f_{syn}^l = Y f_{rev}$ and $f_{syn}^s = \frac{Y}{\kappa} f_{rev}$	$f_{B2B}^l = Y f_{rev}^l$ and $f_{B2B}^s = \frac{Y}{\kappa} f_{rev}^s$
$C^l/C^s = m/n + \lambda$ or $f_{rev}^s/f_{rev}^l = m/n + \lambda$ far away from integer	$\frac{h_{rf}^l}{h_{rf}^s \cdot (m/n+\lambda)}$	$Y/m < 1, f_{syn}^s$	$\Delta f =  f_{syn}^l - f_{syn}^s $ $f_{syn}^l = \frac{Y}{n} f_{rev}$ and $f_{syn}^s = \frac{Y}{m} f_{rev}$	$f_{B2B}^l = \frac{Y}{n} f_{rev}^l$ and $f_{B2B}^s = \frac{Y}{m} f_{rev}^s$

Note:  $f_{ref} = round(f_{B2B}^{trg}/100 \text{ kHz}) \cdot 100 \text{ kHz}$ ,  $T_w = 1/f_{bucket}$  and  $\sigma_{rf} = \pm \frac{1}{2} \cdot 2\pi |f_{syn}^s - f_{syn}^l| \cdot T_w \cdot \frac{h_{rf}^s}{h_{syn}^s}$

# Chapter 7

## Conclusion and Outlook

For many large scale accelerator facilities, it is inevitable to transfer bunched beams from one ring accelerator to another in order to gain higher energy, higher intensity and higher quality beams. Without the proper transfer, the beam will be subject to various disturbances and even beam loss. Hence, the proper bunch-to-bucket transfer between two accelerators is of great importance.

FAIR is aiming at providing high-energy beams of ions from proton to uranium, antiproton and rare isotope with high intensities. The existing facility at GSI includes the SIS18 and the ESR. The new FAIR accelerator complex in its full version will consist of the SIS100, the SIS300, the Collector Ring (CR), the Recycled Experimental Storage Ring (RESR), the New Experimental Storage Ring (NESR) and the High Energy Storage Ring (HESR). Although an implementation of the B2B transfer from the SIS18 to the ESR exists, this solution is not applicable for the new FAIR accelerator complex because of its limitations, e.g. it doesn't support the phase shift method. Hence, the development of the FAIR B2B transfer system is necessary.

The FAIR B2B transfer system is introduced in this work at hand from the conceptual functional point of view. For the B2B transfer, there is a "B2B transfer master", which is responsible for the data collection of two ring accelerators, the data calculation, the data redistribution and the B2B transfer status check. The data of the source and target synchrotron must be transferred to the "B2B transfer master" via the deterministic WR network in the format of the timing frame. For FAIR use cases, the source synchrotron works as the "B2B transfer master". The phase difference between the two rf systems of the source and target synchrotrons is measured by using an a campus-wide distributed reference signal with picosecond precision. The source synchrotron is responsible for the calculation of the start of the synchronization window, the phase correction and the required phase shift (only for phase shift method). The extraction and injection kicker firing is based on the bucket indication signal marker within the synchronization window plus a specified delay. Additionally, all FAIR use cases are analyzed and the precision of the B2B transfer is calculated for all use cases.

The FAIR B2B transfer system supports both the phase shift and frequency beating methods. It is flexible, supporting several B2B transfers running at the same time, e.g. the B2B transfer from the SIS18 to the SIS100 and the B2B transfer from the ESR to the CRYRING. It is capable to transfer beam of different ion species from one machine cycle to another. It has the ability to transfer the beam between two

## CHAPTER 7. CONCLUSION AND OUTLOOK

---

ring accelerators via the FRS, the Pbar and the Super FRS. It can achieve various complex bucket pattern. What is more, the FAIR B2B transfer system coordinates with the MPS system, which protects synchrotrons from unacceptable failure or situation. For most FAIR use cases, it achieves the B2B transfer with the bunch-to-bucket injection center mismatch less than  $\pm 1.5^\circ$  and the required B2B transfer time. It doesn't work properly for the FAIR use cases that the secondary beam is generated by the Pbar, the FRS or the Super FRS, because the revolution frequency ratio between two ring accelerators is random. It is impossible to derive two same or slightly different synchronization frequencies from two revolution frequencies with any random ratio. For the RIB B2B transfer from the SIS100 to the CR via the Super FRS with the heavy ion energy 1.5 Gev/u and the RIB energy 740 Mev/u, it is lucky that the bunch-to-bucket injection center mismatch is only  $\pm 2.1^\circ$ . For the antiproton B2B transfer from the SIS100 to the CR via the Pbar with the proton energy 28.8 Gev/u and the antiproton energy 740 Mev/u and the RIB B2B transfer from the SIS18 to the ESR via the FRS with the heavy ion energy 550 Mev/u and the RIB energy 400 Mev/u, the mismatch is as large as  $\pm 40^\circ$ . For these two cases, the FAIR B2B transfer system works for the beam accumulation only together with the stochastic cooling.

In addition, the beam dynamic analysis of the B2B transfer from the SIS18 to the SIS100 with the phase shift method shows that the sinusoidal modulation is a good choice to keep the beam stability and to guarantee the adiabaticity. The FAIR B2B timing system meets the requirement of the timing constraints and the tolerable accuracy of the start of the synchronization window is approximately 450 ns. Besides, one specified VLAN of the WR network will be used for the B2B transfer system and the tolerate layer of the WR switch among the B2B related SCU and the DM is 8. Further, for the SIS18 extraction kicker, the kicker magnets in the 2<sup>nd</sup> crate could be fired a fixed delay after the firing of the kicker magnets in the 1<sup>st</sup> crate for ion beams over the whole range of stable isotopes. For the SIS100 injection kicker, the kicker magnets could be fired instantaneously for all ion beam.

This work presents a test setup for the system, achieving the phase collection of two ring accelerators locally, the phase transfer from the target synchrotron to the source synchrotron, the calculation of the synchronization window at the source synchrotron, the redistribution of the start of the synchronization window to the WR network and the reproduction of the synchronization window at the source/target synchrotron.

Although the B2B transfer system for FAIR is flexible and versatile, there is still several potential for improvement.

In order to reduce the synchronization time, the synchronization process could be started during the acceleration. The phase difference between two phase measurement signals of the source and target synchrotrons at the flattop could be predicted by comparison the phases of these two signals at any time during the acceleration. Once the phase difference at the flattop is predicted, the synchronization process can be carried out:

- Phase shift method

At a certain time point during the acceleration, the phases difference between the source and target synchrotrons are obtained with the help of the synchronization reference signal and the phase difference at the flattop is picked

## **CHAPTER 7. CONCLUSION AND OUTLOOK**

---

up from a look-up table. Then, a rf frequency modulation is superposed on the initial frequency pattern. The integration of the rf frequency modulation equals to the required phase difference. With this new frequency pattern, the phase difference at the flattop will be the required phase difference when the cavity rf frequency of the source and target synchrotrons reach the flattop.

- Frequency beating method

At a certain time point during the acceleration, the phases difference between the source and target synchrotrons are obtained. Then, a frequency detune is superposed on the initial frequency pattern. With this new frequency pattern, the synchronization window will be calculated.

Besides, the synchronization of the magnetic hole after the Pbar with the antiproton beam, the synchronization of the bunch compressor must be taken into consideration.

## **Appendix A**

### **Glossaries, Abbreviations and Symbols**

# Glossary

accuracy	Deviation between the theoretically calculated start time of the synchronization window and the actual observed start time
B2B transfer master	Responsible for the data collection of two ring accelerators, the data calculation, the data re-distribution and the B2B transfer status check
B2B target SCU	Collects the predicted phase of the target synchrotron and transfers it to the source synchrotron
B2B source SCU	Works as the B2B transfer master
batch	A train of bunches circulating along a synchrotron to be transferred to buckets
best estimate of alignment	Fine time for the alignment of two RF Reference Signals
bucket indication signal	Time indication of a dedicated bucket passing on the virtual rf cavity of the target synchrotron, when it is correct phase aligned with the rf system of the source synchrotron for the bunch-to-bucket injection
bucket pattern	Rules for the buckets to be filled
bucket area factor	Ratio of bucket size of a running bucket to a stationary bucket
bucket size	Area in longitudinal phase space plane enclosed by the bucket
bucket height	Maximum momentum deviation of the rf bucket

## Glossary

---

bunch	Collection of particles captured within one rf bucket
bunch gap	Area without any bunches in a batch
cavity rf frequency	Frequency of the main harmonic, according to which the beam is bunched
Cavity DDS	Cavity DDS provides rf signal for cavities
circumference ratio	Ratio of the circumference for synchrotrons of different size
coarse synchronization	Bunches are transferred into buckets with the bunch-to-bucket center mismatch smaller than the upper bound
extraction kicker	Diverts a circulating beam to leave a synchrotron
fine synchronization	Bunches are transferred into correct buckets
frame error rate	The percentage of the sum of the lost frame, the misordered frame and payload error frames relative to the total number of transferred frames (Rx) during a studied time interval
frame transfer latency	The time interval between the frame reception and sending
Group DDS	DDS module that generates an phase measurement signal for a group of cavities
harmonic number	Integer ratio between the rf frequency and the revolution frequency
injection kicker	Merges one beam into a circulating beam in a synchrotron
kicker fall time	A period of time of kicker magnet to reduce to zero magnetic field

## Glossary

---

kicker flat-top	A period of time of kicker magnet with a stable magnetic field
kicker rise time	A period of time for kicker magnet to reach a stable magnetic field
longitudinal emittance	Area occupied by a bunch in the longitudinal phase space plane
lost frame	The difference between the sent packets and the received packets
machine cycle	One complete operation cycle of a machine, i.e. injection, ramp up, flattop, ejection and ramp down
measurement uncertainty	A non-negative parameter characterizing the dispersion of the values attributed to a measured quantity
misordered frame	The number of misordered packets arriving out of sending sequence
payload error frame	The number of packets received that failed the frame check sequence
phase measurement signal	Harmonic or subharmonic signal generated by the Group DDS and transmitted to the individual rf station as a reference signal
probable range of alignment	Range within which the fine alignment lies because of the propagation of the uncertainty
revolution frequency ratio	Ratio of the revolution frequencies for synchrotrons of different size
running rf bucket	Rf system provides a region in the longitudinal phase space, within which all particles oscillate around the synchronous particle and stay together with energy gain/loss per turn

## Glossary

---

stationary rf bucket	Rf system provides a region in the longitudinal phase space, within which all particles oscillate around the synchronous particle and stay together without energy gain/loss per turn (short: bucket)
synchronization reference signal	Shared synchronous reference signal at each supply room (same frequency and in phase)
synchronization frequencies	An integer multiple of the derived rf frequency, which is a fraction of the revolution frequency. It is used for the phase alignment of the two rf systems
synchronous particle	A particle who always sees a constant rf phase at the rf cavity
synchrotron motion	Oscillation of asynchronous particles around the synchronous particle
T0 incidents	First positive zero-crossings of BuTiS C2 clocks after every BuTiS T0 edge
timing frame	A specific Ethernet frame with 110 byte frame length, which contains one timing message
Trigger SCU	Production of the trigger signal for kicker electronics
tune	Number of particle trajectory oscillations during one revolution in the ring (transverse and longitudinal)
virtual rf cavity	A virtual position around the ring, to which the phase measurement signal corresponds

# Abbreviations

AGS	Alternating Gradient Synchrotron at BNL
API	Application Programming Interface
B2B	Bunch-to-bucket
BI	Beam Instrumentation
BNL	Brookhaven National Laboratory
CCS	Central Control System
CERN	Conseil Européen pour la Recherche Nucléaire
CM	Clock Master
CPU	Central Processing Unit
CR	Collector Ring at GSI
CSCO	Common Systems Control Systems
CSRe	Cooler Storage Ring experimental ring at IMP
CSRm	Cooler Storage Ring main ring at IMP
DDS	Direct Digital Synthesizer
DM	Data Master
DSP	Digital Signal Processor
ESR	Experimental Storage Ring at GSI
FAIR	Facility for Antiproton and Ion Research at GSI
FEC	Front End Controller

## Abbreviations

---

FER	Frame Error Rate
Fermilab	Fermi National Accelerator Laboratory
FESA	Front-End software Architecture
FPGA	Field Programmable Gate Array
FRS	Fragment Separator
GCD	Greatest Common Divisor
GMT	General Machine Timing
GSI	GSI Helmholtzzentrum für Schwerionenforschung
GUI	Graphical User Interface
HESR	High Energy Storage Ring at GSI
HIRFL	Heavy Ion Research Facility at IMP
IMP	Institute of Modern Physics
J-PARC	Japan Proton Accelerator Complex
LEIR	Low Energy Ion Ring at CERN
LHC	Large Hadron Collider at CERN
LLRF	Low-level RF
LSA	LHC Software Architecture
MM	Management Master
MPS	Machine Protection System
MR	Main Ring at J-PARC
NESR	New Experimental Storage Ring at GSI
PAM	Phase Advance Measurement module
PAP	Phase Advance Prediction module
Pbar	Antiproton target

## Abbreviations

---

PBHV	Primary Beam High Voltage
PBRF	Primary Beam Radio Frequency
PC	Personal Computer
PCM	Phase Correction Module
PS	Proton Synchrotron at CERN
PSB	Proton Synchrotron Booster at CERN
PSM	Phase Shift Module
RCS	Rapid Cycle Synchrotron at J-PARC
RESR	Recycled Experimental Storage Ring at GSI
RHIC	Relativistic Heavy Ion Collide at BNL
RIB	Rare Isotope Beams
SBES	Experimentierspeicherring ESR
SCU	Scalable Control Unit
SFC	Sector Focusing Cyclotron at IMP
SHE-P	SHE-Physik
SIS100	SchwerIonen Synchrotron (100 Tm magnetic rigidity) at GSI
SIS18	SchwerIonen Synchrotron (18 Tm magnetic rigidity) at GSI
SIS300	SchwerIonen Synchrotron (300 Tm magnetic rigidity) at GSI
SM	Settings Management
SPS	Super Proton Synchrotron at CERN
SR	Signal Reproduction module
SSC	Separated Sector Cyclotron at IMP

## **Abbreviations**

---

TD	Trigger Decision module
TM	Timing Master
TOF	Time-Of-Flight
UNILAC	Universal Linear Accelerator at GSI
VLAN	Virtual LAN
WR	White Rabbit

# Symbols

$p$	Particle momentum
$R$	Average orbit radius
$L$	Orbit length
$\beta$	Relative speed to the speed of light
$c$	Speed of the light
$\gamma$	Relativistic factor, which measures the total particle energy, $E$ , in units of the particle rest energy, $E_0$
$E$	Total particle energy
$E_0$	Particle rest energy
$\alpha_p$	Momentum compaction factor
$\eta$	Phase-slip factor
$q$	Charge of a particle
$\alpha_b$	Bucket area factor
$\omega_s$	Angular synchrotron frequency
$B$	Magnetic field
$\rho$	Bending radius of a particle immersed in a magnetic field $B$
$h_{rf}^X$	Cavity harmonic number of a specified synchrotron

## Symbols

---

$h_{rev}^X$	Harmonic number of the revolution frequency of a specific synchrotron, which is defined as the first harmonic
$f_{syn}^X$	Synchronization frequency
$h_{syn}^X$	Harmonic number of the synchronization frequency of a specific synchrotron
$\varepsilon$	Adiabaticity parameter
$Q_{x/y}$	Horizontal/vertical tune
$Q'_{x/y}$	Horizontal/vertical chromaticity
$\Delta Q_{x/y}$	Horizontal/vertical tune shift
$T_w$	Length of the synchronization window
$t_{bucket}$	Bucket delay for a specific bucket pattern
$t_{TOF}$	Time-of-Flight between two ring accelerators
$t_{v\_ext}$	Time corresponding to the distance between the virtual rf cavity and the extraction position of the source synchrotron
$t_{v\_inj}$	Time corresponding to the distance between the virtual rf cavity and the injection position of the target synchrotron
$t_{ext}$	Extraction kicker delay
$t_{inj}$	Injection kicker delay
$t_{diff\_sync}$	Goal time difference between the synchronization frequencies of two ring accelerators in the format of time
$\phi^X$	Measured phase deviation between the synchronization frequency and the synchronization reference signal of the synchrotron X
$\varphi^X$	Measured phase deviation between the phase measurement signal and the synchronization reference signal of the synchrotron X

## Symbols

---

$\varphi_0^X$	Initial value of the phase deviation between the phase measurement signal and the synchronization reference signal of the synchrotron X
$T_{sample\_PAM}$	Measurement sampling period of the phase deviation measurement by the PAM module
$\psi^X$	Extrapolated phase advance between the phase measurement signal and the synchronization reference signal of the synchrotron X
$T_{sample\_PAP}$	Extrapolation sampling period of the phase extrapolation by the PAP module
$\psi_0^X$	Phase advance extrapolated by the PAP module at $t_\psi^X$ of the X synchrotron.
$t_\psi^X$	Timestamp corresponding to the extrapolated phase advance $\psi^X$
$f_{normalized}$	Normalized rf frequency modulation profile, preloaded from SM
$f_{actual}$	Actual rf frequency modulation profile, calculated by PSM
$t_{delay}$	Delay compensation for the TOF, all propagation delays, the kicker preparation time and the bucket delay
$t_w$	Start of the synchronization window, calculated by B2B source SCU
$t_{v\_emg}$	Time corresponding to the distance between the virtual rf cavity and the emergency extraction position of SIS100
$t_{emg}$	Extraction kicker delay of SIS100 for the emergency kick
$t_{align}$	Best estimate of alignment of zero crossing points of phase measurement signals of source and target synchrotrons
$\delta t_{align}$	Uncertainty of the best estimate of alignment of zero crossing points of phase measurement signals of source and target synchrotrons

## Symbols

---

$\delta\psi_0^X$	Uncertainty of the extrapolated phase of the synchrotron X in the phase domain
$\delta t_\psi^X$	Uncertainty of the measured timestamp
$t_{w\_rect}$	Rectified start of the synchronization window, calculated by B2B source SCU
$\delta t_{w\_rect}$	Uncertainty of the start of the synchronization window, calculated by B2B source SCU
$t_{gap}$	Bunch gap
$d_{crt1R-crt2L}$	Distance between two crates of the SIS18 extraction kicker
$d_{crt1L-crt2R}$	Distance from the leftmost to the rightmost of the SIS18 extraction/SIS100 injection kicker
$d_{crt1R-crt2R}$	Distance between the rightmost of the 1 <sup>st</sup> crate and the rightmost of the 2 <sup>nd</sup> crate of the SIS18 extraction kicker
$t_{B2B}$	Start time of the B2B transfer
$\phi_s$	Synchronous phase
$f_{rf}$	Rf frequency
$h$	Harmonic number
$f_{rev}$	Revolution frequency
$f_{ref}$	Frequency of the synchronization reference signal
$f_{B2B}^X$	Frequency of the specified phase measurement signal for the phase advance measurement
$u$	Longitudinal accelerating voltage at rf cavity
$V_0$	Amplitude of the rf voltage
$m_0$	Rest mass
$C^X$	Circumference of the extraction/injection orbit of a specific synchrotron

## Symbols

---

$f_{rev}^X$	or $f_{h=1}^X$ . Revolution frequency of a specific synchrotron
$f_{rf}^X$	or $f_{h=cavity\,harmonic}^X$ . Cavity rf frequency of a specific synchrotron
$T$	Duration of rf frequency modulation for the phase shift method
$Y$	Greatest common divisor
$\phi_0^X$	Initial phase deviation between the synchronization frequency and synchronization reference signal of the synchrotron X
$\Delta\phi_{rf}$	Phase difference between two cavity rf frequencies of two ring accelerators
$\Delta\phi_{syn}$	Phase difference between two synchronization frequencies of two ring accelerators
$\Delta f_{syn}$	Rf frequency modulation on the synchronization frequency for the phase shift method, rf frequency detuning on the synchronization frequency for the frequency beating method
$\Delta f_{rf}$	Rf frequency modulation on the cavity rf frequency for the phase shift method, rf frequency detuning on the cavity rf frequency for the frequency beating method
$\sigma_{syn}$	Phase mismatch between two synchronization frequencies within the synchronization window
$\sigma_{rf}$	Phase mismatch between two cavity rf frequencies within the synchronization window
$T_{rev}^X$	Period of the revolution period of machine X
$T_{rf}^X$	Period of the cavity rf frequency of machine X
$f_{bucket}$	Rf frequency of the bucket indication signal

## Symbols

---

$k^X$	Slope of the phase deviation between the synchronization reference signal and a dedicated phase measurement signal of the synchrotron X
$\Delta\phi_{syn\_0}$	Phase difference between two synchronization frequencies of two ring accelerators at time $t_\psi^X$
$\Delta\phi_{goal}$	Goal phase difference between the synchronization frequencies of two ring accelerators
$\Delta\phi_{adjust}$	Required phase adjustment for the phase alignment on the synchronization frequency
$\Delta\phi_{shift}$	Required phase shift for the Group DDS with the synchronization frequency
$\Delta\phi_{shift\_imp}$	Implemented phase shift for the Group DDS with the revolution frequency
$T_{wait}$	Waiting time for the phase matching of the frequency beating method

## **Appendix B**

### **FAIR B2B Transfer related Timing Frames**

**APPENDIX B. FAIR B2B TRANSFER RELATED TIMING FRAMES**

---

Table B.1: B2B timing frames

No	Frame Name	Event ID	Priority	Source	Destination
1	CMD_START_B2B		7	DM	Source and B2B target SCU
2	TGM_PHASE_TIME		6	B2B target SCU	B2B source SCU
3	TGM_SYNCH_WIN		6	B2B source SCU	DM
4	CMD_SYNCH_WIN		7	DM	BI, source and target Trigger SCUs
5	TGM_PHASE_JUMP		6	B2B source SCU	B2B target SCU
6	TGM_PHASE_CORRECTION		6	B2B source SCU	Source Trigger SCU
7	TGM_KICKER_TRIGGER_TIME_S		6	Source Trigger SCU	B2B source SCU
8	TGM_KICKER_TRIGGER_TIME_T		6	Target Trigger SCU	B2B source SCU
9	TGM_B2B_STATUS		6	B2B source SCU	DM
10	CMD_B2B_STATUS		7	DM	BI
No	Content	Description			
1	64 bits timestamp(event execution)	Begin of the B2B transfer process			
2	16 bits phase advance and 64 bits slop (param)	Transfer of the phase advance and the slop			
3	64 bits timestamp (param)	Transfer the start of the synchronization window			
4	64 bits timestamp (event execution)	Indication the start of the synchronization window			
5	16 bits the expected jumped phase (param)	Indication the jumped phase for the empty target machine			
6	16 bits phase correction (param)	Target revolution frequency reproduction			
7	2 × 64 bits timestamp (param)	Timestamps of trigger and firing of extraction kicker			
8	2 × 64 bits timestamp (param)	Timestamps of trigger and firing of injection kicker			
9	64 bits timestamp + 1 bit (param)	The actual beam extraction time and the status of the B2B system			
10	64 bits timestamp (param)	The actual beam extraction time			

## **Appendix C**

### **Timing Frames Transfer for FAIR B2B Transfer System**

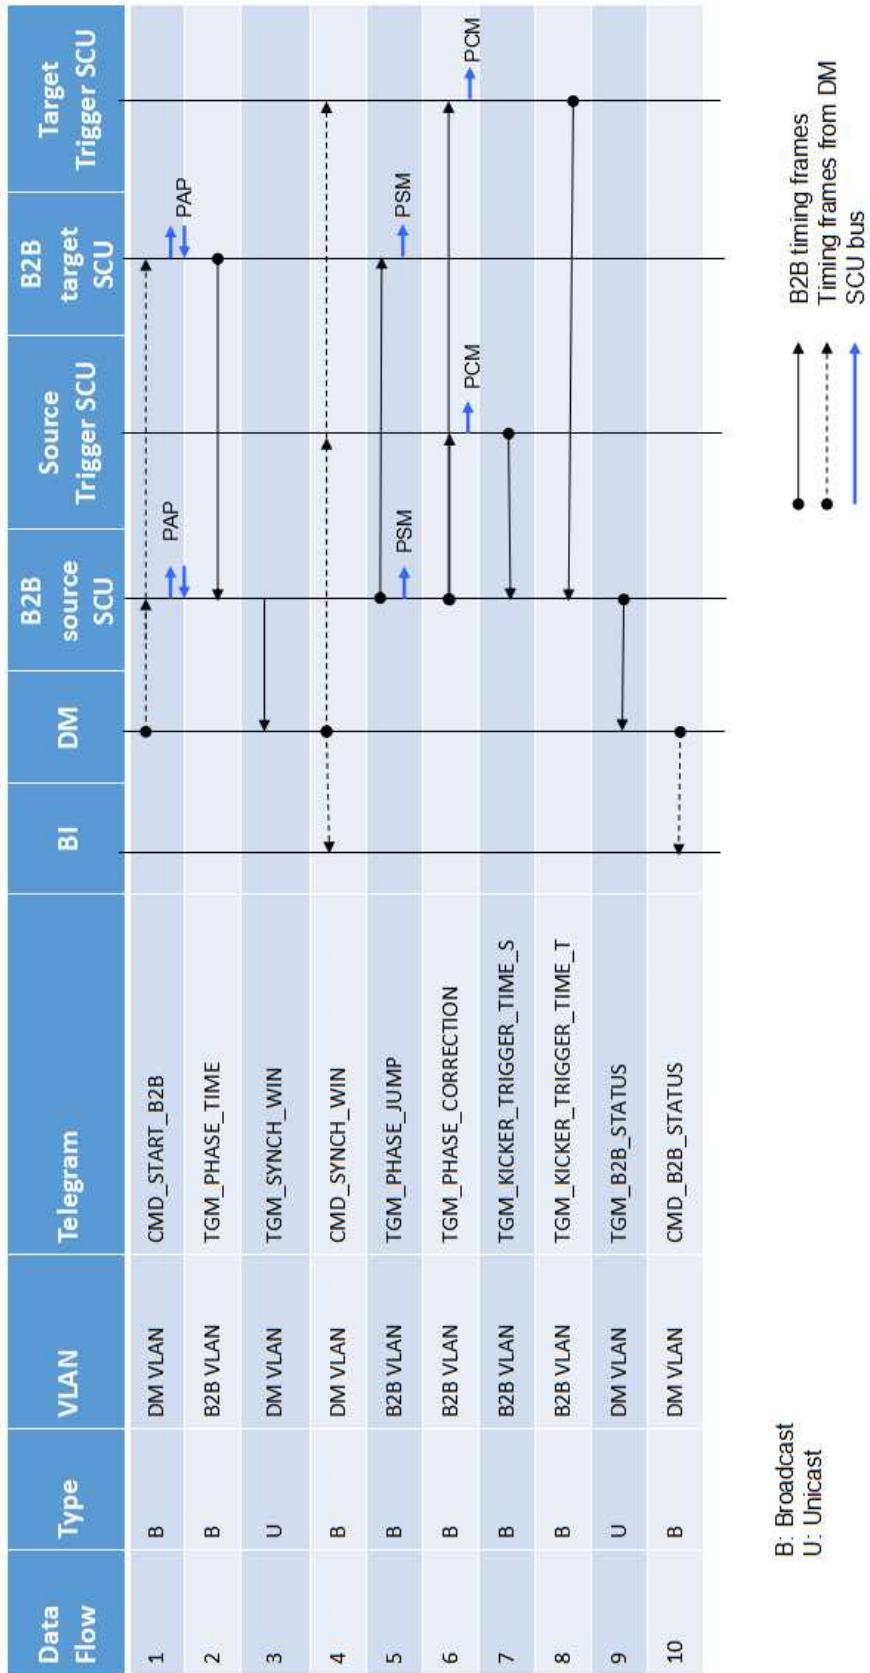


Figure C.1: Timing frames transfer for the B2B transfer

# Appendix D

## Parameters of FAIR Use Cases

### D.1 Parameters related to the B2B transfer from the SIS18 to the SIS100

		Proton		Heavy Ion $U^{28+}$	
	Unit	SIS18 Ext	SIS100 Inj	SIS18 Ext	SIS100 Inj
Design orbit	m	216.72	1083.6	216.72	1083.6
$C_{SIS18} : C_{SIS100}$		5		5	
Ext kinetic energy	MeV/u	4000		200	
Inj kinetic energy	MeV/u		4000		200
h		1	10(1×4)	2	10(2×4)
$f_{rf}$	MHz	1.359358	2.718715	1.572536	1.572536
$T_{rf}$	μs	0.736	0.368	0.636	0.636
$f_{rev}$	MHz	1.359358	0.271872	0.786268	0.157254
$T_{rev}$	μs	0.736	3.678	1.272	6.359
Max $\Delta p/p$		±0.008	±0.01	±0.008	±0.01
$\Delta R/R$		$\pm 0.8 \times 10^{-4}$		$\pm 2.4 \times 10^{-4}$	
$\eta = \frac{1}{\gamma^2} - \alpha_p$		0.026		0.647	
$\gamma_t$		10		5.8	
$\alpha_p$		0.010		0.030	
$\beta$		0.982	0.982	0.568	0.568
$\gamma$		5.294	5.294	1.215	1.215
$Q_x$		4.17		4.17	
$Q_y$		3.4		3.4	
$Q'_x$		-7.5		-6.5	
$Q'_y$		-4.4		-4.1	
		Injection four times		Injection four times	

Table D.1: Parameters related to the B2B transfer from the SIS18 to the SIS100

## D.2 Parameters related to the B2B transfer from the SIS18 to the ESR

		Proton/Heavy Ion		Heavy Ion	
	Unit	SIS18 Ext	ESR Inj	SIS18 Ext	ESR Inj
Design orbit	m	216.72	108.36	216.72	108.36
Inj orbit	m		108.36 +0.15		108.36 +0.15
$C_{SIS18} : C_{ESR}$		1.997		1.997	
Ext kinetic energy	MeV/u	550		30	
Inj kinetic energy	MeV/u		400		30
h		1	1	4	2
$f_{rf}$	MHz	0.989756	1.976777	1.373201	1.371302
$T_{rf}$	μs	1.010	0.506	0.728	0.879
$f_{rev}$	MHz	0.989756	1.976777	0.343300	0.685651
$T_{rev}$	μs	1.010	0.506	2.913	1.458
$\Delta p/p$ compared with design orbit			1%		1%
$\Delta R/R$			0.138%		0.138%
$\eta = \frac{1}{\gamma^2} - \alpha_p$		0.480	0.310	0.909	0.759
$\gamma_t$		10	2.357	5.8	2.357
$\alpha_p$		0.010	0.18	0.030	0.18
$\beta$		0.715	0.715	0.248	0.248
$\gamma$		1.429	1.429	1.032	1.032
		Accumulation beam in injection orbit		Accumulation beam in injection orbit	

Table D.2: Parameters related to the B2B transfer from the SIS18 to the ESR

### D.3 Parameters related to the B2B transfer from the SIS18 to the ESR via the FRS

		Heavy Ion Beam	Rare Isotope Beam
	Unit	SIS18 Ext	ESR Inj
Design orbit	m	216.72	108.36
Inj orbit	m		108.36 +0.15
$C_{SIS18} : C_{ESR}$		1.997	
Ext kinetic energy	MeV/u	550	
Inj kinetic energy	MeV/u		400
h		1	1
$f_{rf}$	MHz	1.076965	1.976777
$T_{rf}$	μs	0.929	0.506
$f_{rev}$	MHz	1.076965	1.976777
$T_{rev}$	μs	0.929	0.506
$\Delta p/p$ compared with design orbit			1%
$\Delta R/R$			0.138%
$\eta = \frac{1}{\gamma^2} - \alpha_p$		0.366	0.310
$\gamma_t$		5.8	2.357
$\alpha_p$		0.030	0.18
$\beta$		0.778	0.715
$\gamma$		1.590	1.429
		One time injection	

Table D.3: Parameters related to the B2B transfer from the SIS18 to the ESR via the FRS

#### D.4. Parameters related to the B2B transfer from the ESR to the CRYRING

---

## D.4 Parameters related to the B2B transfer from the ESR to the CRYRING

		Proton/Antiproton		Heavy Ion	
	Unit	ESR Ext	CRYRING Inj	ESR Ext	CRYRING Inj
Design orbit	m	108.36	54.18	108.36	54.18
Ext orbit	m	108.36 +0.15		108.36 +0.15	
$C_{ESR} : C_{CRYRING}$		2.003		2.003	
Ext kinetic energy	MeV/u	30		4-10	
Inj kinetic energy	MeV/u		30		4-10
h		1	1	1	1
$f_{rf}$	MHz	0.685651	1.373200	0.254354- 0.400885	0.509507- 0.802879
$T_{rf}$	μs	1.458	0.728	3.932- 2.494	1.963- 1.246
$f_{rev}$	MHz	0.685651	1.373200	0.254354- 0.400885	0.509507- 0.802879
$T_{rev}$	μs	1.458	0.728	3.932- 2.494	1.963- 1.246
$\eta = \frac{1}{\gamma^2} - \alpha_p$		0.759		0.798-0.812	
$\gamma_t$		2.357		2.357	
$\alpha_p$		0.18		0.18	
$\beta$		0.248	0.248	0.092-0.145	0.092-0.145
$\gamma$		1.032	1.032	1.004-1.011	1.004-1.011
		One time injection		One time injection	

Table D.4: Parameters related to the B2B transfer from the ESR to the CRYRING

## D.5 Parameters related to the B2B transfer from CR to HESR

		Proton→ Antiprotron		Heavy Ion→ RIB	
	Unit	CR Ext	HESR Inj	CR Ext	HESR Inj
Design orbit	m	221.45	575	221.45	575
$C_{HESR} : C_{CR}$		2.597		2.597	
Ext kinetic energy	GeV/u	3		0.74	
Inj kinetic energy	GeV/u		3		0.74
h		1	1	1	1
$f_{rf}$	MHz	1.316775	0.507131	1.124408	0.433043
$T_{rf}$	μs	0.759	1.972	0.889	2.309
$f_{rev}$	MHz	1.316775	0.507131	1.124408	0.433043
$T_{rev}$	μs	0.759	1.972	0.889	2.309
Max $\Delta p/p$		±3%		±1.5%	
$\eta = \frac{1}{\gamma^2} - \alpha_p$		-0.011		0.178	
$\gamma_t$		3.85		2.711	
$\alpha_p$		0.067			
$\beta$		0.972	0.972	0.830	0.830
$\gamma$		4.221	4.221	1.794	1.794
		100 times Injection per 10 seconds		100 times Injection per 10 seconds	

Table D.5: Parameters related to the B2B transfer from the CR to the HESR

## D.6 Parameters related to the B2B transfer from the SIS100 to the CR

		Proton→ Antiproton		Heavy Ion→ RIB	
	Unit	SIS100 Ext	CR Inj	SIS100 Ext	CR Inj
Design orbit	m	1083.6	221.45	1083.6	221.45
$C_{SIS100} : C_{CR}$		4.893		4.893	
Ext kinetic energy	GeV/u	28.8		1.5	
Inj kinetic energy	GeV/u		3		0.74
h		5(1 bunch)	1	2(1 bunch)	1
$f_{rf}$	MHz	1.383509	1.316778	0.511628	1.124408
$T_{rf}$	μs	0.723	0.759	1.955	0.889
$f_{rev}$	MHz	0.276702	1.316778	0.255814	1.124408
$T_{rev}$	μs	3.614	0.759	3.909	0.889
Max $\Delta p/p$		±3%		±1.5%	
$\beta$		0.9995	0.972	0.924	0.830
$\gamma$		31.918	4.221	2.610	1.794
		One time injection		One time injection	

Table D.6: Parameters related to the B2B transfer from the SIS100 to the CR

## **Appendix E**

### **Parameters of FAIR B2B Transfer System from Settings Management**

**APPENDIX E. PARAMETERS OF FAIR B2B TRANSFER SYSTEM FROM SETTINGS MANAGEMENT**

---

Table E.1: Parameters for the B2B transfer provided by SM

Parameter	Destination	Usage
$f_{syn}^X$	B2B source SCU	Start of synchronization window calculation
$f_{syn}^{REF}$	B2B source SCU	Phase advance extrapolation for PCM
Frequency of bucket indication signal	B2B source SCU $\Rightarrow$ SR B2B target SCU $\Rightarrow$ SR Trigger SCU $\Rightarrow$ SR	Bucket label signal production
$t_{delay}$	Delay compensation for TOF, all propagation and kicker preparation	Start of synchronization window calculation
Extraction kicker delay compensation	B2B source SCU Trigger SCU $\Rightarrow$ TD	Extraction kicker trigger signal production
Injection kicker delay compensation	Trigger SCU $\Rightarrow$ TD	Injection kicker trigger signal production
Emergency kicker delay compensation	Trigger SCU $\Rightarrow$ TD	Emergency kicker trigger signal production
Goal time	B2B source SCU	Start of synchronization window calculation or phase correction calculation for PCM
$t_{diff-sync}$	two synchrotrons	difference between two synchronization frequencies of
$\Delta f$	B2B source SCU	Start of synchronization window calculation
$T$	Duration of rf frequency modulation for the phase shift method	Start of synchronization window calculation and rf frequency modulation profile with certain duration T production
$\Delta f_{rf}, \Delta \dot{f}_{rf}$ and $\Delta \ddot{f}_{rf}$	B2B source SCU $\Rightarrow$ PSM	Adiabatical rf frequency modulation profile production

# Appendix F

## Parameters of kicker magnets

Table F.1: Parameters of kicker magnets

Kicker	Units	Preparation time	Kicker rise time	Kicker fall time
SIS18 extraction kicker	9	5 us	90 ns	arbitrary
SIS100 injection kicker	6	5 us	130 ns	$\frac{1}{4}T_{rev}$
SIS100 extraction/ emergency kicker	8	10 us	750 ns	arbitrary
CR injection/ extraction kicker	9		320 ns	
ESR injection kicker	3		90 ns	

## **APPENDIX F. PARAMETERS OF KICKER MAGNETS**

---

# List of Figures

1.1	Illustration of a bunch-to-bucket transfer. . . . .	2
1.2	The structure of the dissertation. . . . .	6
2.1	The longitudinal focusing of particles by a rf voltage ( $\eta > 0$ ). . . . .	10
2.2	The longitudinal motion of asynchronous particles in the longitudinal phase space plane ( $\eta > 0$ ). . . . .	10
2.3	A stationary rf bucket. . . . .	12
2.4	A running rf bucket. . . . .	13
2.5	The bunch-to-bucket injection with a phase, energy or voltage error. .	14
2.6	The constant phase difference between two synchronization frequencies $f_{syn}^l$ and $f_{syn}^s$ when $\kappa = 5$ , $h_{rf}^s = 1$ and $h_{rf}^l = 10$ . . . . .	17
2.7	The periodically variable phase difference between two slightly different synchronization frequencies $f_{syn}^l$ and $f_{syn}^s$ when $\kappa = 2$ , $\lambda = -0.003$ , $h_{rf}^s = 2$ and $h_{rf}^l = 4$ . . . . .	19
2.8	The periodically variable phase difference between two synchronization frequencies $f_{syn}^l$ and $f_{syn}^s$ when $m = 26$ , $n = 10$ , $\lambda = -0.003$ , $h_{rf}^s = 1$ and $h_{rf}^l = 1$ . . . . .	20
2.9	An example for the phase shift method with a sinusoidal rf frequency modulation. . . . .	21
2.10	The illustration of the frequency beating method. . . . .	25
2.11	The schematic diagram of a kicker magnet. . . . .	27
2.12	The rise time, kicker flat-top and fall time of an extraction kicker. .	28
2.13	The rise time, kicker flat-top and fall time of an injection kicker for multiple batches injection. . . . .	29
3.1	phase measurement signal distribution system . . . . .	33
3.2	Local Cavity Synchronization . . . . .	34
4.1	The illustration of the B2B transfer from the SIS18 to the SIS100. .	37
4.2	The frequency of the bucket indication signal equals to the revolution frequency of the target synchrotron. . . . .	40
4.3	The frequency of the bucket indication signal equals to the synchronization frequency of the target synchrotron. . . . .	40
4.4	The procedure for the B2B transfer within one acceleration cycle. .	42
4.5	The phase deviation between the synchronization frequency and the synchronization reference signal. . . . .	43
4.6	The realization of the phase deviation measurement at one synchrotron	46
4.7	The realization of the phase advance extrapolation at one synchrotron	47

## LIST OF FIGURES

---

4.8	Integration of the Phase Advance Prediction Module into the B2B source SCU . . . . .	47
4.9	The synchronization of the extrapolated phase to the timestamp in one synchrotron . . . . .	48
4.10	One example of the transfer path of the B2B timing frames in the WR network . . . . .	49
4.11	The normalized frequency and phase modulation profile and the actual profiles . . . . .	51
4.12	Integration of the Phase Shift Module into the B2B source SCU . . . . .	51
4.13	The transfer delay of the start of the synchronization window on the WR network. . . . .	52
4.14	Integration of the Phase Correction Module into the Trigger SCU . . . . .	54
4.15	The realization of the bucket label for the normal extraction and injection. . . . .	55
4.16	The realization of the bunch gap for the emergency extraction. . . . .	55
4.17	Integration of the Trigger Decision module into the Trigger SCU . . . . .	56
4.18	The illustration of the kicker delay compensation when the bucket indication signal has the frequency of $f_{syn}^{trg}$ . . . . .	57
4.20	The current realization of the bunch-to-bucket transfer between the SIS18 and the ESR with the GSI control system. . . . .	59
4.19	The data flow of the B2B transfer system . . . . .	62
5.1	Examples of rf frequency modulation. . . . .	65
5.2	First derivative of three cases. . . . .	66
5.3	Second derivative of three cases. . . . .	66
5.4	The phase shift modulation of three cases. . . . .	67
5.5	Maximum orbit length displacement of three cases. . . . .	67
5.6	Relative momentum shift of three cases. . . . .	68
5.7	Changes in synchronous phase of three cases. . . . .	69
5.8	Ratio of bucket areas of a running bucket to the stationary bucket of three cases. . . . .	69
5.9	Adiabaticity parameter of three cases. . . . .	70
5.10	The rectification of the start of the synchronization window. . . . .	76
5.11	The accuracy of the start of the synchronization window. . . . .	78
5.12	The WR network test setup. . . . .	80
5.13	Frame loss rate of the B2B Broadcast frames. . . . .	81
5.14	The maximum frame transfer latency for B2B Broadcast frames. . . . .	82
5.15	The maximum frame transfer latency for B2B Unicast frames. . . . .	83
5.16	The schematic diagram of the kicker magnets in the 2 <sup>nd</sup> crate of the SIS18 extraction kicker. . . . .	84
5.17	A possible firing delay between kicker magnets in two crates of SIS18 extraction kicker. . . . .	85
5.18	The maximum firing delay between kicker magnets in two crates of SIS18 extraction kicker. . . . .	85
5.19	The minimum firing delay between kicker magnets in two crates of SIS18 extraction kicker. . . . .	86
5.20	SIS100 injection kicker. . . . .	87
5.21	Schematic of the test setup. . . . .	88

## **LIST OF FIGURES**

---

5.22 The front view of the test setup. . . . .	89
5.23 Flow chart of the firmware for the B2B source SCU. . . . .	90
5.24 Flow chart of the firmware for the B2B target SCU. . . . .	92
5.25 Flow chart of the firmware for the B2B Trigger SCU. . . . .	93
5.26 The time constraints of the B2B transfer system. . . . .	95
C.1 Timing frames transfer for the B2B transfer . . . . .	136

## **LIST OF FIGURES**

---

# List of Tables

5.1	Acceptable range of the parameters accompanying with the frequency adjustment of the phase shift method for the SIS18 $H^+$ and $U^{28+}$ beams	64
5.2	Acceptable range of the parameters accompanying with the frequency beating method for the SIS18 $H^+$ and $U^{28+}$ beams	64
5.3	The maximum orbit length displacement of three cases	68
5.4	The maximum relative momentum shift of three cases	68
5.5	The minimum bucket area factor of three cases	70
5.6	The maximum adiabaticity of three cases	70
5.7	Parameters accompanying with a 7 ms sinusoidal modulation for the SIS18 $H^+$ beam	72
5.8	Parameters accompanying with a 20 ms sinusoidal modulation for the SIS18 $H^+$ beam	72
5.9	Uncertainty of the phase alignment of all FAIR B2B use cases	76
5.10	B2B transfer requirements on the WR network	79
5.11	The connection between the traffic generator and WR switches	81
5.12	The maximum frame transfer latency of the B2B Broadcast frames	82
5.13	The result of the WR network test for the B2B transfer	83
5.14	The firing delay for SIS18 kicker magnets in two crates	86
5.15	The delay for firing SIS00 injection kicker	87
6.1	List of the FAIR B2B transfer use cases	98
6.2	Parameters related to the B2B transfer when the circumference ratio is an integer and the large synchrotron is the target	99
6.3	Parameters related to the B2B transfer when the circumference ratio is an integer and the small synchrotron is the target	100
6.4	Parameters related to the $U^{28+}$ B2B transfer from the SIS18 to the SIS100 with the frequency beating method	101
6.5	Parameters related to the $H^+$ B2B transfer from the SIS18 to the SIS100 with the frequency beating method	101
6.6	Parameters related to the B2B transfer when the circumference ratio is close to an integer and the large synchrotron is the target	103
6.7	Parameters related to the B2B transfer when the circumference ratio is close to an integer and the small synchrotron is the target	103
6.8	Parameters related to the h=4 B2B transfer from the SIS18 to the ESR with the frequency beating method	104
6.9	Parameters related to the h=1 B2B transfer from the SIS18 to the ESR with the frequency beating method	105

6.10	Parameters related to the B2B transfer from the ESR to the CRYRING with the frequency beating method . . . . .	105
6.11	Parameters related to the B2B transfer when the circumference ratio is far away from an integer and the large synchrotron is the target . .	107
6.12	Parameters related to the B2B transfer when the circumference ratio is far away from an integer and the small synchrotron is the target . .	107
6.13	Parameters related to the $H^+$ B2B transfer from the SIS100 to the CR with the frequency beating method . . . . .	108
6.14	Parameters related to the RIB B2B transfer from the SIS100 to the CR with the frequency beating method . . . . .	109
6.15	Parameters related to the B2B transfer from the CR to the HESR with the frequency beating method . . . . .	110
6.16	Parameters related to an applied case of the B2B transfer from the SIS18 to the ESR via the FRS with the frequency beating method . .	110
6.17	Summary of the formulas related to the B2B transfer when the large synchrotron is the target . . . . .	112
6.18	Summary of the formulas related to the B2B transfer when the small synchrotron is the target and the revolution period is longer than the period of the synchronization frequency of the target synchrotron . .	113
6.19	Summary of the formulas related to the B2B transfer when the small synchrotron is the target and the revolution period is shorter than the period of the synchronization frequency of the target synchrotron	114
B.1	B2B timing frames . . . . .	134
D.1	Parameters related to the B2B transfer from the SIS18 to the SIS100	137
D.2	Parameters related to the B2B transfer from the SIS18 to the ESR . .	138
D.3	Parameters related to the B2B transfer from the SIS18 to the ESR via the FRS . . . . .	139
D.4	Parameters related to the B2B transfer from the ESR to the CRYRING	140
D.5	Parameters related to the B2B transfer from the CR to the HESR . .	141
D.6	Parameters related to the B2B transfer from the SIS100 to the CR . .	142
E.1	Parameters for the B2B transfer provided by SM . . . . .	144
F.1	Parameters of kicker magnets . . . . .	145

# Publications

- 2015 J. Bai, T. Ferrand, D. Beck, R. Bär, O. Kester, D. Ondreka, C. Prados, and W. Terpstra. Bunch to Bucket Transfer System for FAIR. In *Proc. of ICAL EPICS*, 2015
- T. Ferrand and J. Bai. System Design for a deterministic Bunch-to-Bucket Transfer. In *Proc. of IPAC*, 2015
- 2014 J. Bai, D. Beck, R. Bär, D. Ondreka, T. Ferrand, M. Kreider, C. Prados, S. Rauch, W. Terpstra, and M. Zweig. First Idea on Bunch to Bucket Transfer for FAIR. In *Proc. of PCaPAC*, 2014
- M. Kreider, J. Bai, R. Bär, D. Beck, A. Hahn, C. Prados, S. Rauch, W. Terpstra, and M. Zweig. Launching the FAIR Timing System with CRYRING. In *Proc. of PCaPAC*, 2014
- T. Ferrand and J. Bai. System Simulation of Bunch-to-Bucket Transfer Between Synchrotrons. *GSI Scientific Report*, 2014
- 2013 J. Bai, L. Zeng, B. Wang, P. Li, F. Li, T. Xu, and Z. Li. Modified Read-out System of the Beam Phase Measurement System for CSNS. *Chinese physics C*, 37(10):107004, 2013
- D. Beck, J. Adamczewski-Musch, J. Bai, R. Bär, J. Frühauf, J. Hoffmann, M. Kreider, N. Kurz, C. Prados, S. Rauch, S. Voltz, and M. Zweig. Paving the Way for the General Machine Timing System. *GSI Scientific Report*, 2013
- M. Kreider, J. Bai, D. Beck, C. Prados, W. Terpstra, S. Rauch, and M. Zweig. Receiver Nodes of the General Machine Timing System for FAIR and GSI
- 2012 J. Bai, S. Xiao, T. Xu, and L. Zeng. The Development of Timing Control System for RFQ. In *Proc. of LINAC*, 2012

# Jiaoni Bai

---

## Curriculum Vitae

*"I am a slow walker, but I never stop walking." - Jiaoni Bai*

### Education

- 2013–Now **Ph.D of physics**, Goethe University, Frankfurt am Main, Germany, .
- 2010–2013 **Master of Engineering Study in Computer Technology**, Institute of High Energy Physics, Chinese Academy of Sciences, Peking, China, GPA – 8.0.
- 2006–2010 **Bachelor of Engineering Study in Medical Informatics Engineering**, Southern Medical University, Guangzhou, China, GPA – 9.0.

### PhD Dissertation

- Title *Development of the timing system for the Bunch-to-Bucket transfer between the FAIR accelerators*
- Professor Prof. Oliver Kester
- Supervisors Dr. Dietrich Beck and Dr. David Ondreka
- Description
- Development of the Bunch-to-Bucket transfer system
  - C-programming of the soft CPU LatticeMico32
  - VHDL programming of Altera FPGAs
  - Measurement of the White Rabbit network performance

### Master Thesis

- Title *The development of EPICS driver for customized VME hardwares*
- Supervisor Taoguang Xu
- Description
- Development of the software interface between EPICS and VME hardware
  - Development of the operator controlling and monitoring interfaces by MEDM hardware
  - VxWorks program for Motorola VME board MVME5100

### Bachelor Thesis

- Title *The CCD performance test and analysis*

R"omergasse 10 – 64291 Darmstadt, Germany

✉ (49) 017682537175 • ☎ (49) 6159 71 3126

✉ baijiaoni1314@gmail.com

- Description
- Investigation of the influence factors for CCD
  - Test how these factors influence CCD

## Awards

- 2012 Won "Scholarship of the head of the Institute of High Energy Physics, CAS" for master thesis
- 2007 Won second prize of "Mathematical Contest in Modeling in Southern Medical University"

## Key skills

- Intermediate Network engineering, Bash shell script and Visual Basic programming
- Advanced VHDL program for Altera FPGAs, C, Accelerator technology and beam dynamics, VxWorks programming and EPICS

## Computer literacy

- Basic Windows, Linux (Ubuntu/Debian), Microsoft Office and LaTeX applications
- Engineering Altera Quartus and Matlab applications
- Art design Photoshop and Corel VideoStudio application
- Web design Dreamweaver

## Languages

- Mandarin Mothertongue Chinese
- English Good written and spoken
- German Goethe-Zertifikat B2

R"omergasse 10 – 64291 Darmstadt, Germany

✉ (49) 017682537175 • ☎ (49) 6159 71 3126  
✉ baijiaoni1314@gmail.com