

STM32CubeMX Untitled*: STM32F103C8Tx

File Window Help myST

Home > STM32F103C8Tx > Untitled - Pinout & Configuration > GENERATE CODE

Pinout & Configuration Clock Configuration Project Manager Tools

Software Packs Pinout

Categories A-Z

- IWDG
- NVIC
- RCC
- SYS
- WWDG

Analog >

Timers >

- RTC
- TIM1
- TIM2
- TIM3
- TIM4

Connectivity >

- CAN
- I2C1

TIM3 Mode and Configuration

Mode

Slave Mode Disable

Trigger Source Disable

☒ Internal Clock

Channel1 Disable

Configuration

Reset Configuration

☒ NVIC Settings ☒ DMA Settings

☒ Parameter Settings ☒ User Constants

Configure the below parameters :

Search (Ctrl+F)

Counter Settings

Prescaler (PSC...) 1999

Counter Mode Up

Counter Period ... 1999

Internal Clock D... No Division

auto-reload prel... Disable

> Trigger Output (TRGO) ...

Pinout view System view

Pinout view

STM32F103C8Tx LQFP48

Pinout diagram showing the chip and its connections.

STM32CubeMX Untitled*: STM32F103C8Tx

File Window Help myST

Home > STM32F103C8Tx > Untitled - Pinout & Configuration > GENERATE CODE

Pinout & Configuration Clock Configuration Project Manager Tools

Software Packs Pinout

Search []

Categories A-Z

- GPIO
- IWDG
- NVIC
- RCC
- SYS**
- WWDG

Analog >

Timers >

- RTC
- TIM1
- TIM2
- TIM3**
- TIM4

Connectivity >

- CAN
- I2C1

SYS Mode and Configuration

Mode

Debug Serial Wire

☐ System Wake-Up

Timebase Source SysTick

Configuration


Warning: This peripheral has no parameters to be configured

Pinout view System view

Pinout view

STM32F103C8Tx LQFP-B

? Select Pins from table to configure them. Multiple sele

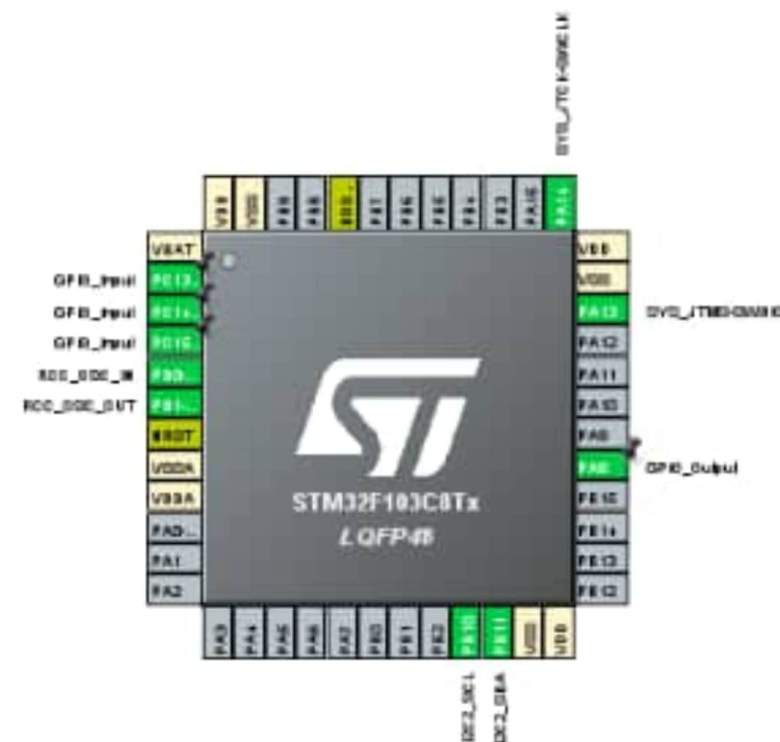

12C 12C

Mode

Configuration

Reset Configuration

DMA Settings

GPIO Settings

- User Constants

- NVIC Settings

Parameter Settings

Configure the below parameters :

Search (Ctrl+F)

▼ Master Features

I2C Speed Mode Standard Mode

150 Clock Cycles 400000

