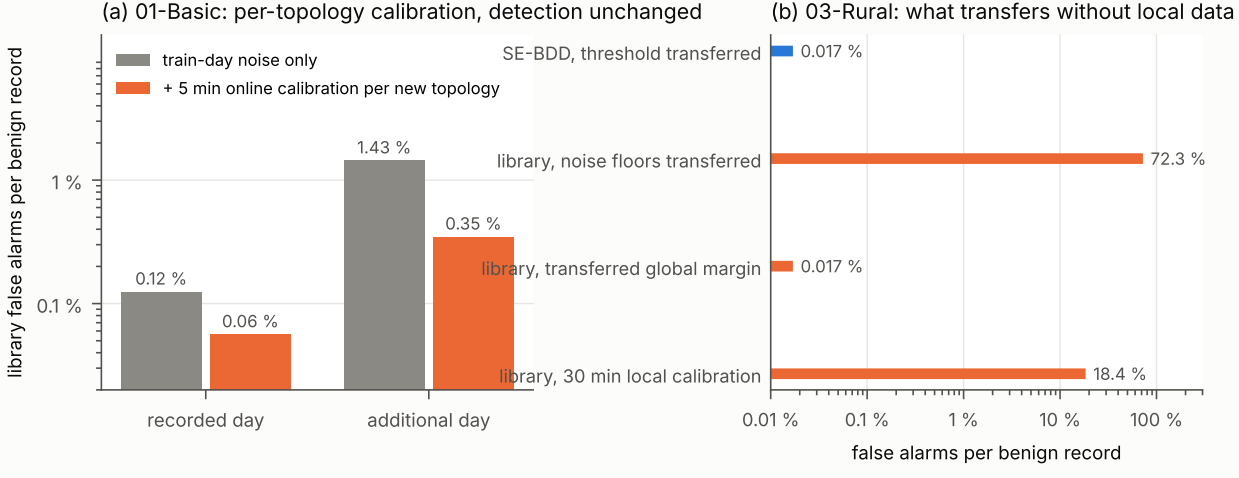
(a) 01-Basic: per-topology calibration, detection unchanged
train-day noise only
+ 5 min online calibration per new topology
library false alarms per benign record
1 %
0.1 %
0.12 %
0.06 %
1.43 %
0.35 %
recorded day
additional day
(b) 03-Rural: what transfers without local data
SE-BDD, threshold transferred
0.017 %
library, noise floors transferred
72.3 %
library, transferred global margin
0.017 %
library, 30 min local calibration
18.4 %
0.01 %
0.1 %
1 %
10 %
100 %
false alarms per benign record