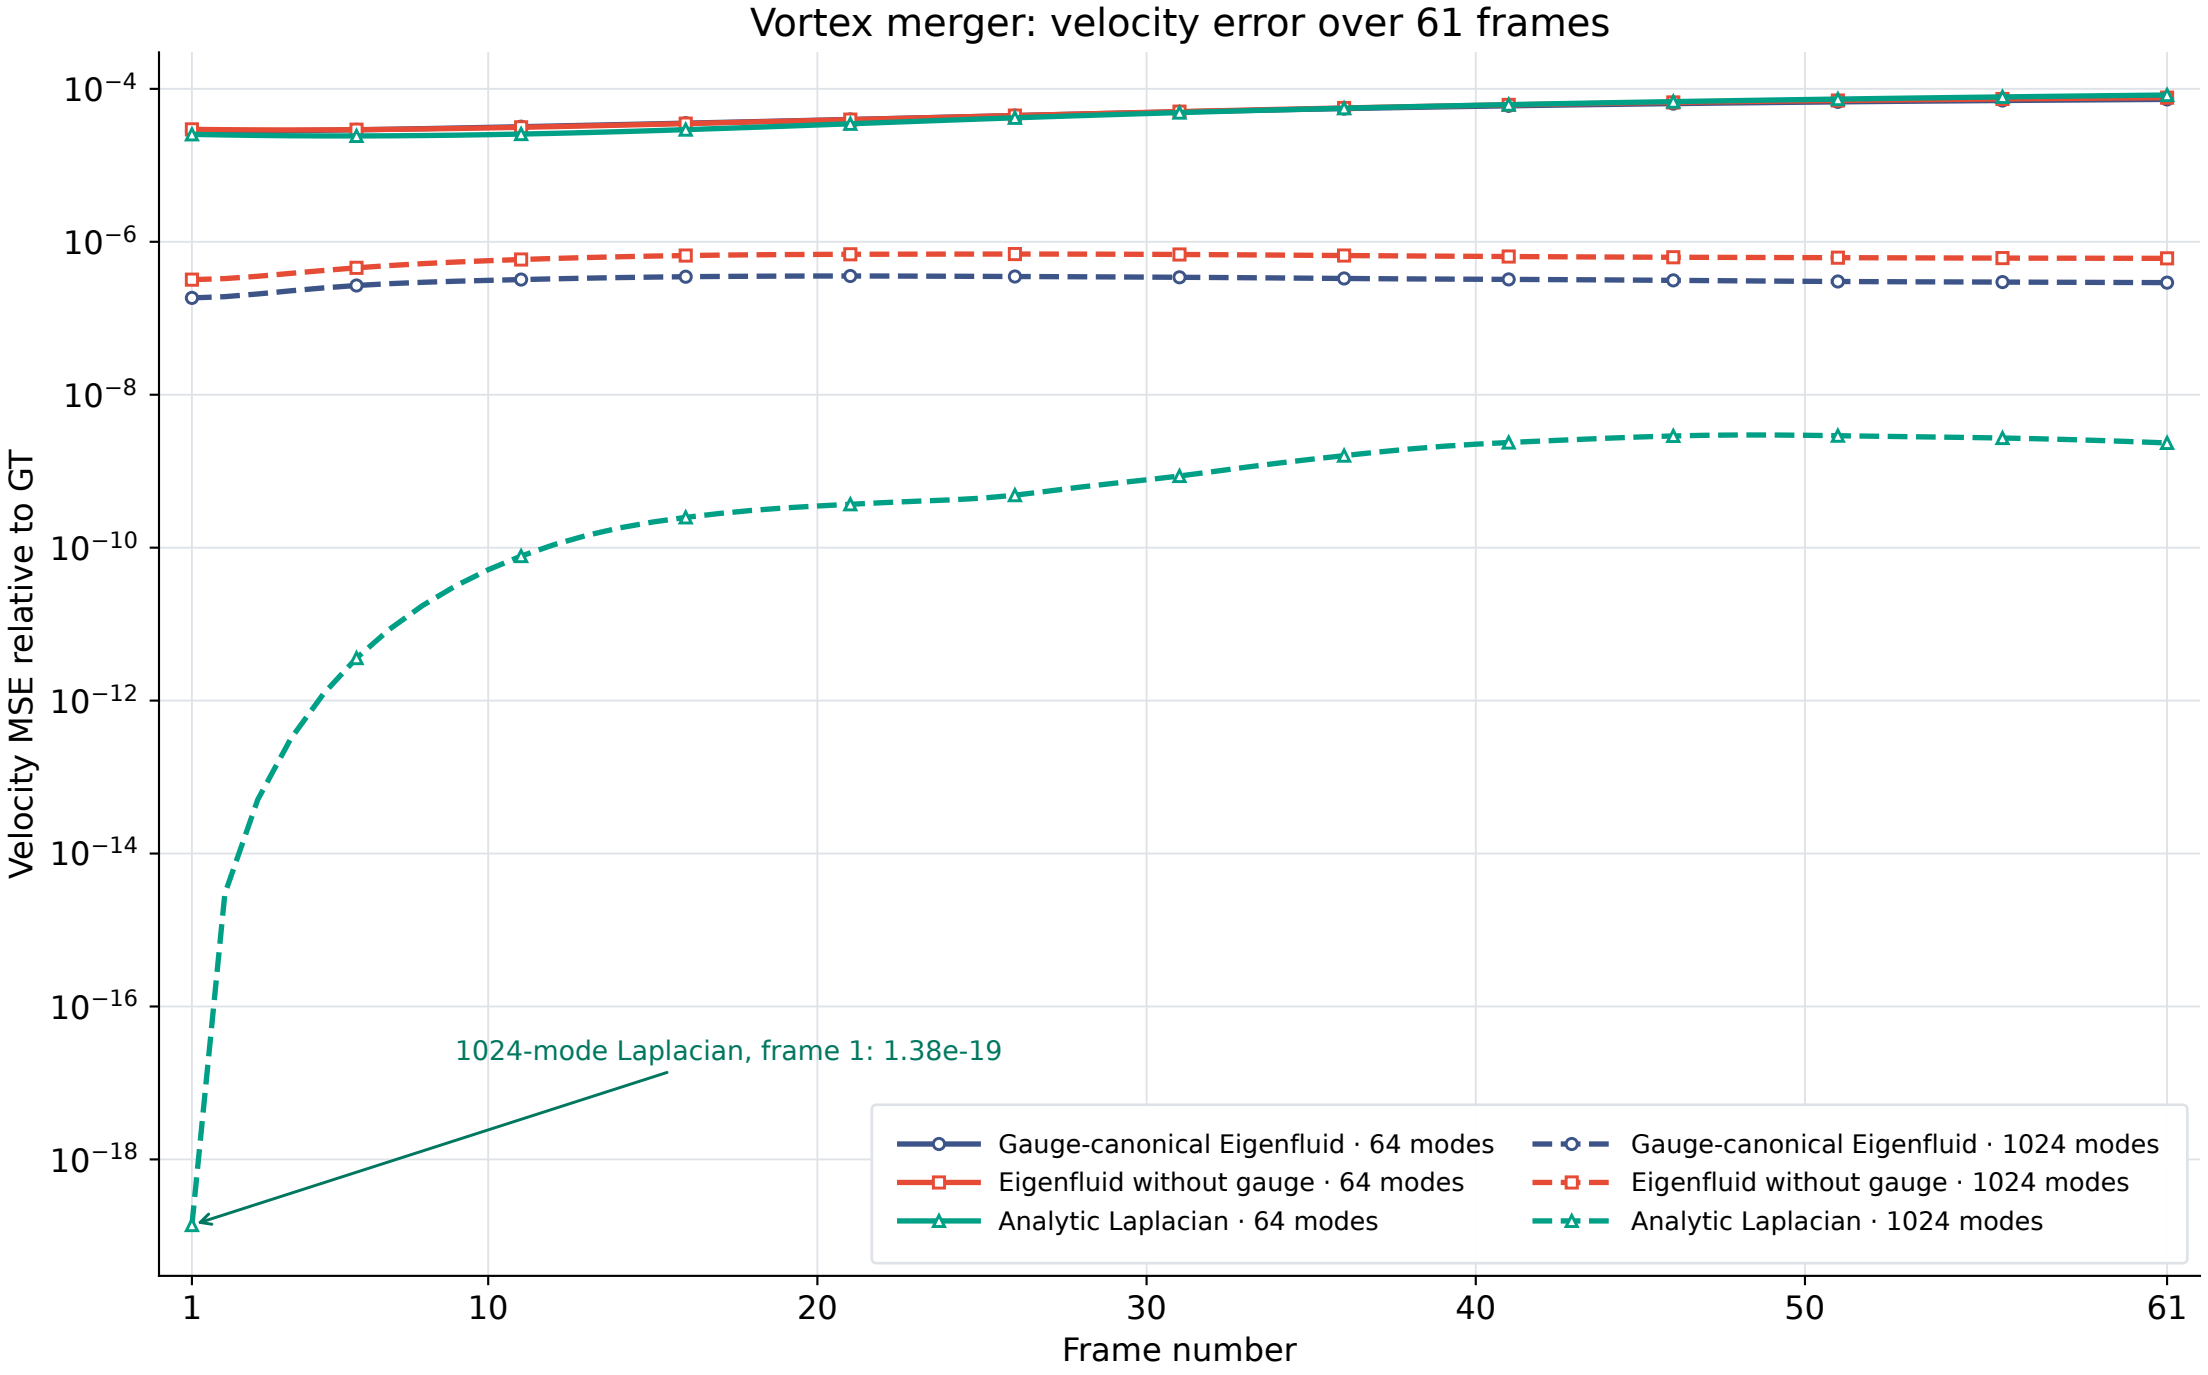

Frame 1 = t = 0 projection; frames 2–61 = autonomous rollout. Solid: 64 modes; dashed: 1024 modes.