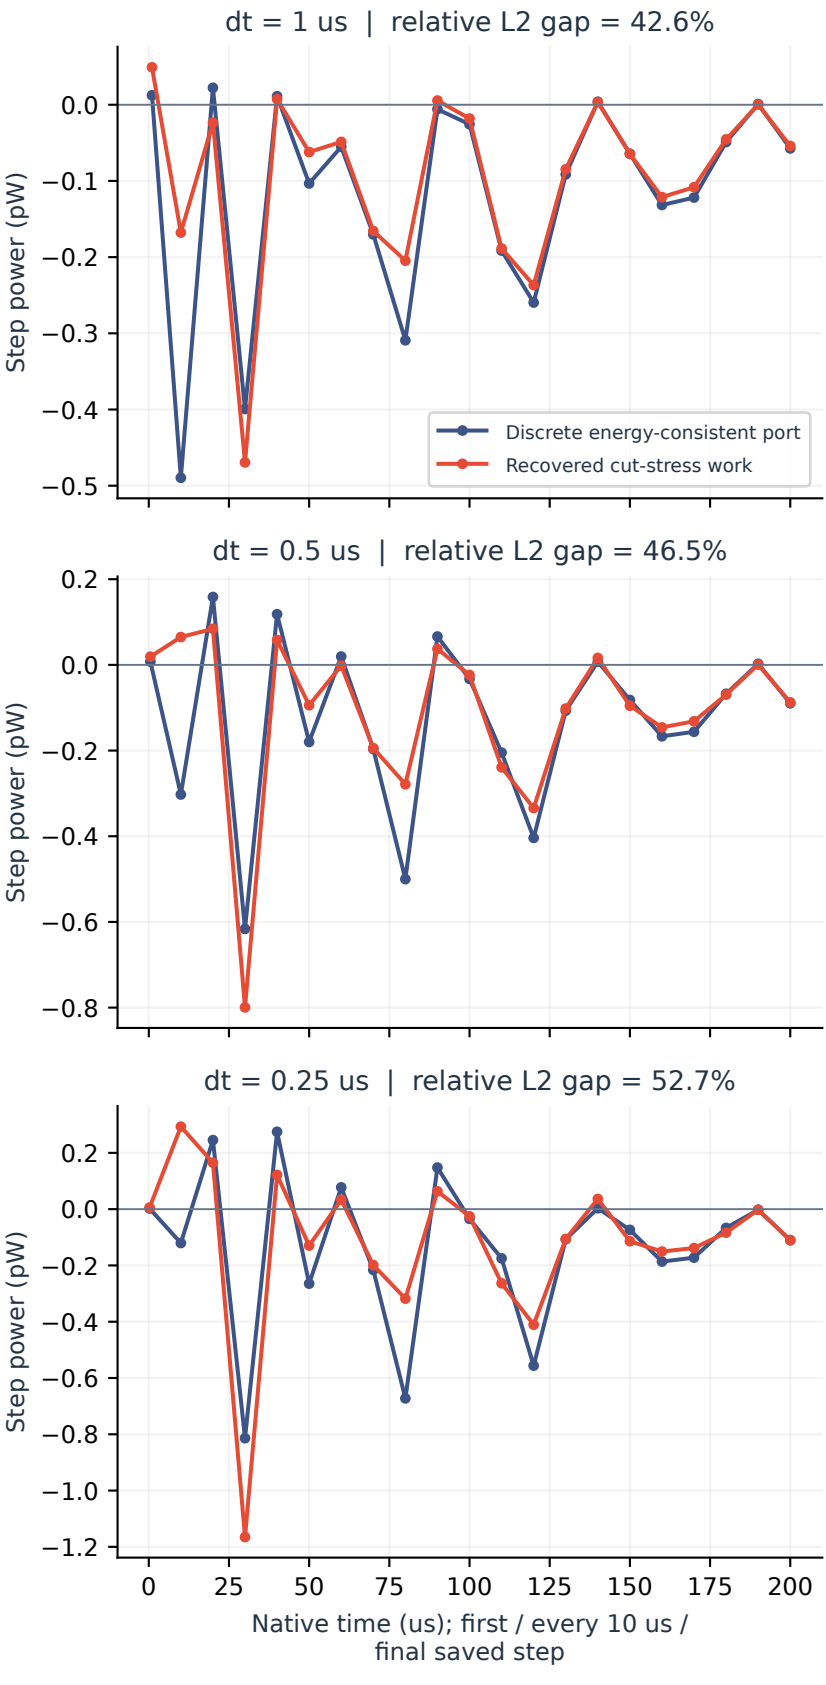

dt = 1 us | relative L2 gap = 42.6%
dt = 0.5 us | relative L2 gap = 46.5%
dt = 0.25 us | relative L2 gap = 52.7%
Step power (pW)
Discrete energy-consistent port
Recovered cut-stress work
Native time (us); first / every 10 us / final saved step