BAVARIA® Wall Mounting Steel Fire Cabinet

Type

TAURUS

HIGH HAZARD 6 STARS SERIES

Applications:

The TAURUS model emulates the steel fire cabinet using high quality steel 100% electrostatic pure polyester red coating. Bavaria wall mounting steel fire cabinet is suitable for use in both areas outdoors & indoors, as in offices, schools, sports areas, cinemas, assembly rooms, hotels, resorts, malls, airports, hospitals industrial and commercial fire protection needs , such as manufacturing, petrolum companies, warehouse, apartment buildings, restaurants, malls, and else ...

ISO 9001-2015 DNV.GL
ISO 14001 2015 DNV.GL
OHSAS 18001
ISO 17025 IEC

BAVARIA EGYPT (S.A.E.)
Gisr El Suez St. Block 109, Industrial Zone,
Ismailia Desert Road, Cairo-Egypt
PO Box: 2016/11111 Cairo-Egypt

Tel. : + 20 (2) 2182 0604 / 5 / 6
Fax : + 20 (2) 2182 0609
Website : www.bavaria-firefighting.com
Email : international.sales@bavaria.com.eg

BAVARIA Brandschutz Industrie GmbH & Co. KG
Regensburger Str. 16,
93449 Waldmunchen
Germany

Tel. : + 49 (9972) 9401-0
Fax : + 49 (9972) 9401-17
Website : www.bavaria-firefighting.com
Email : info@bavaria-brandschutz.de

BAVARIA® Wall Mounting Steel Fire Cabinet

Type: TAURUS High Hazard ★★★★★★

Cabinet Features:

- Standard design cabinet 800 x 800 x 300 mm (WxHxD) for wall mounting.
- The cabinet door is provided with concealed axial hings enabling it to swing up to 180°.
- The cabinet door is provided with long built in handle and close with two latching points.
- The cabinet has two inlet holes (upper & lower) for water feeding pipes sealed with polymer or rubber seals.
- The fire cabinet carries photo luminescent signs that are crucial during emergency situations and power failure.

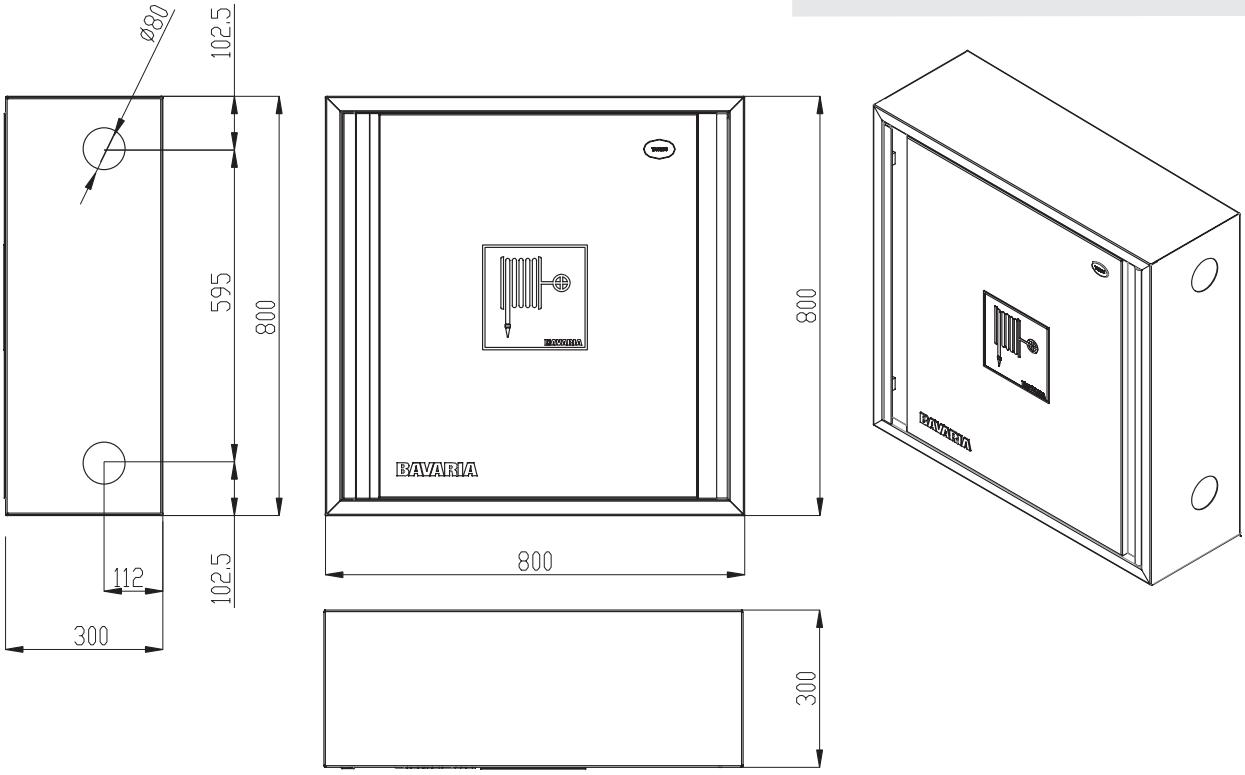

Cabinet Technical Specifications:

Cabinet type	TAURUS
Cabinet Dimensions (wxhxd)	800 x 800 x 300 mm
Cabinet Material	Steel
Opening Door	Right (standard) or left (option)
Cabinet Steel Thickness	1.5 mm
Door Hings	Concealed galvanized steel axial hings
Cabinet Paint Finish	Surface treatment and 100% electrostatic pure polyester red coating

BAVARIA® Wall Mounting Steel Fire Cabinet

Type: TAURUS High Hazard ★★★★★★

Standard Components For Fire Cabinets with 64 mm (2 ½ inch) x 30 m / 38 mm (1½ inch) Diameter **x 30 m** Length

Technical Specifications

DELIVERY HOSES	
Type	Bavaria Standard - Type 1
Country of Origin	German made
Hose Diameter and Length	64 mm (2 ½ inch) x 30 m / 38 mm (1½ inch) x 30 m
Fabrication	Flat nylon hose with internal rubber lining
Optimum Working Pressure Range	17 bar
Hose Bursting Pressure	50 bar
Hose Coupling	Equipped with instantaneous coupling BS 366, 64 mm (2 ½ inch)
Approval	**DIN 50049 / EN 10204**

Landing Valves (fire valves) with 30° Outlet - For hose diameter 64 mm (2 ½ inch) / 38 mm (1½ inch)	
Country of Origin	German made
Inlet thread	G 2½ A
Outlet Inst. female	2½"-Alu
Weight (kg)	2,700
Coupling Type	2.5 inch instantaneous coupling BS 336
Approval	DIN 14461-3



DIN 14461-3

BAVARIA water branchpipe for hose diameter 64 mm (2 ½ inch) / 38 mm (1½ inch)	
Type	BAVARIA
Material	High strength aluminium alloy
Operation Mode	Full jet
Working Pressure Range	Upto 16 bar
Max. Output	215 l/min when the ball valve is completely opened
Max. Throw Range	27 m @ nozzle pressure 6 bar
Coupling Type	2.5 inch instantaneous coupling BS 336