


COMPRESSION SPRING ENGINEERING DRAWING

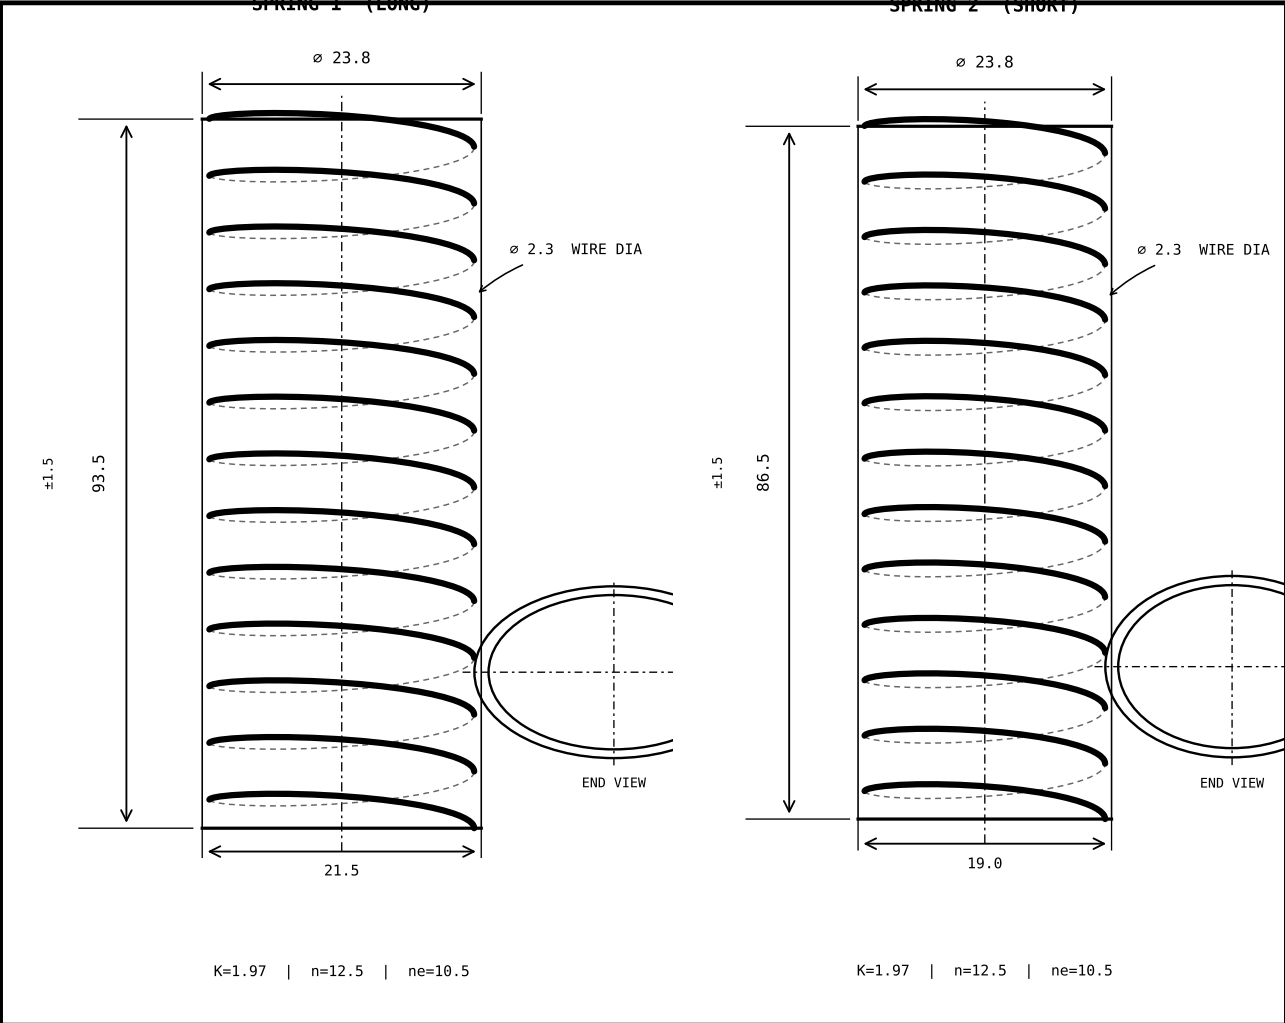

NOTES:

1. END TYPE: CLOSED & NOT GROUND
2. COILING DIRECTION: RIGHT HAND
3. TOTAL COILS = 12.5
ACTIVE COILS = 10.5
4. SPRING CONSTANT:

SP1: ~1.97 N/mm (±10%)

SP2: ~1.97 N/mm (±10%)
5. MATERIAL: SPRING STEEL WIRE Gr.SH

ZINC PLATED, CHROME VI FREE 5-8µm

SMOOTH, CONTINUOUS, FREE FROM

SURFACE IMPERFECTIONS
6. COLOR: WHITE COATING
7. AFTER 24HRS FULL COMPRESSION:

LENGTH CHANGE < 1.5mm
8. TOLERANCE ON FREE LENGTH: ±1.5mm
9. SPRING MACHINING PRECISION: GRADE 2

NO.	CODE	FREE LEN	OD (mm)	WIRE Ø	COILS T/E	QTY
1	QDBJ2020060502-1	93.5±1.5 mm	23.8	Ø2.3	12.5 / 10.5	2
2	QDBJ2020060502-2	86.5±1.5 mm	23.8	Ø2.3	12.5 / 10.5	2

DRAWN	CHECKED	APPROVED	DATE: 24/04/2026 SHEET: 1 / 1
CABE SPRINGS & FASTENERS, GOA			
SCALE: 1.000 PROJ: FIRST ANGLE (IS:696)		STD: BIS SP:46 ANSI/ASME Y14.5M	
TITLE: COMPRESSION SPRINGS QDBJ2020060502-1 & -2			
MATERIAL: SPRING STEEL		DRG NO: QDBJ2020060502 WT: — COLOR: WHITE	