LORENTZ

Liquid Pressure Sensor

Sensor for measuring the pressure of liquid in a pipe or vessel
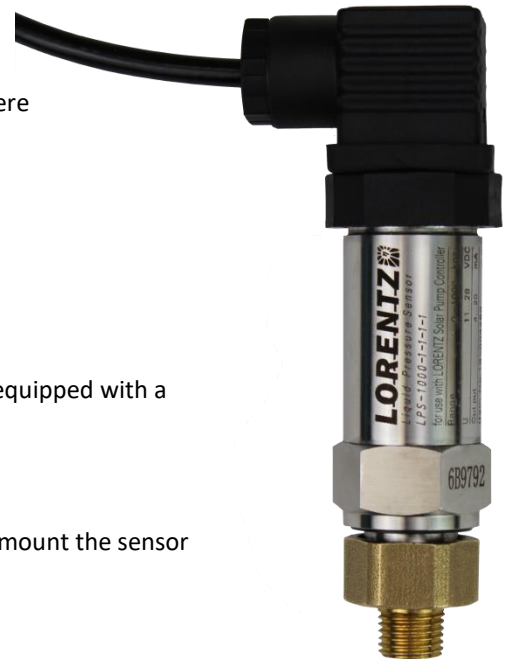
USE / PURPOSE

The sensors are commonly used to measure the pressure in the delivery pipeline or in a vessel. The pressure signal is used with a suitable LORENTZ pump controller to measure pressure and for pressure switching or constant presure applications. The liquid pressure sensor must be used with a compatible LORENTZ Controller (see requirements).

FEATURES

- Gauge pressure sensor, pressure measurement relative to atmosphere
- For measuring pressure in a pipe or vessel
- Accurate, robust sensor
- For use with LORENTZ PumpScanner and pumpMANAGER

REQUIREMENTS

- LORENTZ PS2 controller , LORENTZ PSk2 controller or PS Controller equipped with a licensed PS DataModule
- Care must be taken to position the sensor without turbulent water to ensure accurate measurement
- G1/4" or G1/2" female threaded filling / air vent hole is required to mount the sensor

TECHNICAL DATA

- Sensor type: 2 wire gauge sensor
- Enclosure class: IP65
- Sensor housing : stainless steel
- Connects to LORENTZ PS DataModule
- 1m (3 ft) cable length
- Overpressure: 1.5x full scale
- Output signal : 4-20 mA
- Voltage : 11-28 VDC
- Application temp.: -30 to 80°C
  -22 to 176°F
- Accuracy class : 0.5% full scale
- Thread type: G1/2" male (G1/4" with adapter)
- Meets the requirements for CS

ORDER INFORMATION

Item #	Product	Pressure range
19-004450	Liquid Pressure Sensor, LPS-500	0-500 kPa 0 to 50 m / 0 to 160 ft 0 to 5 bar / 0 to 72.5 psi
19-004460	Liquid Pressure Sensor, LPS-1000	0-1000 kPa 0 to 100 m / 0 to 330 ft 0 to 10 bar / 0 to 145 psi

DIMENSION/WEIGHT

- Packing dimensions: 190 x 180 x 80 mm
  7.5 x 7.1 x 3.2 in
- Weight: 0.6 kg / 1.3 lbs

Sun. Water. Life.