Runtime Assurance for Sampling-Based Optimizers in Flood Re-Planning: Exact Verification and Certified Escalation

Nandhakumar T
Department of Information Technology
Sona College of Technology
Salem, Tamil Nadu, India
nandhakumartm93@gmail.com

Balakarthikeyan B S
Department of Artificial Intelligence and Data Science
Sona College of Technology
Salem, Tamil Nadu, India
balasan2626@gmail.com

Gowthaman J
Department of Artificial Intelligence and Data Science
Sona College of Technology
Salem, Tamil Nadu, India
gowthamanjanadhran@gmail.com

Abhishek S
Department of Artificial Intelligence and Data Science
Sona College of Technology
Salem, Tamil Nadu, India
abisheksengodan18@gmail.com

***Abstract*—Quantum and annealing-based optimizers are proposed for disaster logistics, but their samples carry no guarantee of validity and their penalty encodings are often inexact. We study a re-planning loop that reassigns evacuation groups to shelters as roads close and shelters fail. It verifies every sample exactly, falls back to a greedy rule and, before calling a human, asks a mixed-integer program (MILP) whether any valid plan exists. On 180 events of a flood digital twin, dispatching the most frequent sample unchecked would have sent an invalid plan in 16.6% of draws on solvable events for the Quantum Approximate Optimization Algorithm (QAOA) and 6.5% for simulated annealing; even the best penalty-free QAOA sample was invalid in 5.9%, because the pairwise capacity penalty misses overloads by three or more groups. The verified loop dispatched none. On 360 instances on OpenStreetMap networks of six Indian cities, annealing found a valid plan in 71.3% of calls at 8 groups and 17.0% at 32, neither retuning nor a one-hot annealer lifted the 32-group rate above 18.1%, and an uncertified loop escalated 4.4% of solvable cases. A solver-first loop that waits 1 s for the MILP and keeps the sampler as fallback dispatched an optimal plan in 82.5% of solvable city calls, against 37.0% when the sampler goes first. Solver time-outs must never be read as infeasibility; at these sizes the samplers add no value, and we claim no quantum advantage.**

***Index Terms*—runtime assurance, quantum optimization, simulated annealing, mixed-integer programming, evacuation planning**

I. Introduction

When a flood closes roads and fills shelters, the assignment of evacuation groups to shelters has to be re-made, often many times in one night. The assignment is a small constrained optimization problem, and it is often used as a test problem for quantum and quantum-inspired optimizers, which take it as a quadratic unconstrained binary optimization (QUBO) problem [1]–[4]. Two properties of these tools matter in operations. They return *samples*, so the same call can give a different, possibly invalid answer. And the QUBO they solve encodes capacity limits with penalties, which is exact only in special cases: a sample that satisfies every penalty can still overfill a shelter.

Safety-critical systems run unreliable components inside a *runtime-assurance* architecture, in which a simple verified controller checks or replaces the complex one [5], [6], as shields do for learned policies [7]. For a sampling optimizer we ask how often its output would be unsafe without the check, how the loop should decide between trying harder and calling a human when no sample is valid, and how many samples it should draw. Our contributions, for flood re-planning, are:

1) A runtime-assurance loop for sampling optimizers with an exact plan verifier, a greedy fallback and a *certified escalation* step that uses a mixed-integer program (MILP) to decide whether any valid plan exists (Fig. 1).
2) A measurement on twin episodes with QAOA [8], [9] and simulated annealing [10] of how often unverified dispatch would be unsafe, for the most frequent, the lowest-energy and the best penalty-free sample, with a classification of every unsafe sample by the rule it breaks.
3) A city-scale study on OpenStreetMap road graphs of six Indian cities, beyond the reach of enumeration, showing where samplers and uncertified loops fail and what the certificate costs in time.
4) A comparison with an exact-solver-first loop in time and plan cost, and a shot-budget bound with an adaptive budget.

All QAOA results are classical simulations; we make no claim of quantum speed-up.

II. Related Work

Runtime assurance. The Simplex architecture switches from an unverified high-performance controller to a verified safety controller when the former leaves a safe envelope [5]; SOTER brings the pattern to robotics software [6], shields apply it to reinforcement learning [7], and runtime verification checks executions against a specification as they happen [11]; Hobbs *et al.* survey such safety filters [12]. Levels-of-automation theory argues that automation should fall as the cost of an error rises [13]. Our verifier is the switching logic, and the MILP plays the role of the verified controller of last resort.

Samplers as tools. Variational quantum algorithms are hybrid loops in which a classical optimizer calls a quantum circuit [14]; QAOA with constraint-preserving mixers keeps one-hot structure but still penalizes capacity [9], [15]. Quantum annealing has been applied to disaster resource allocation [3], and reviews stress that practical advantage in optimization is unproven [4]. Inequality constraints enter a QUBO through slack variables or through approximate penalties without slack [2], [16], so a sample that satisfies every penalty is not guaranteed to be valid.

Evacuation planning. Shelter allocation has long been solved with integer programming [17]; modern MILP solvers such as HiGHS [18] make exact solutions cheap at the sizes of a city district. Repairing a plan rather than re-planning from scratch reduces disruption [19].

We are not aware of runtime assurance applied to sampling optimizers; the sampler studies cited here report solution quality per call, not what happens when a loop acts on the answer.

III. Problem and Loop

A. Assignment

Groups $g = 1, \dots, G$ of size n_g are assigned to shelters $s = 1, \dots, S$ with remaining seats R_s. With travel cost c_{gs} on the best open path and a set $\mathcal{F}$ of forbidden pairs (no open path, failed shelter, group larger than the seats left), a plan $\mathbf{x} \in \{0,1\}^{G \times S}$ is valid when

$$V(\mathbf{x}) = \Big[\textstyle\sum_s x_{gs} = 1 \ \forall g\Big] \wedge \Big[x_{gs} = 0 \ \forall (g,s) \in \mathcal{F}\Big] \wedge \Big[\textstyle\sum_g n_g x_{gs} \le R_s \ \forall s\Big], \quad (1)$$

and the planner minimizes $\sum_{g,s} c_{gs} x_{gs}$ over valid plans. Samplers solve the QUBO with a per-group shifted cost, a one-hot penalty and a pairwise penalty $P\, x_{gs} x_{hs}$ for every two groups that together exceed R_s [2]. The pairwise term misses overloads by three or more groups whose pairs all fit, so a sample can satisfy every penalty and still violate (1). Exact encodings exist, with slack variables [2] or one penalty term per minimal overloading set of groups, at the cost of extra qubits or higher-order terms; we keep the pairwise form, which needs neither, and treat its blind spot as one of the failures the loop must catch.

Algorithm 1 Runtime-assurance re-planning at one event

```
draw N shots (adaptive: batches of b until one passes V)
x ← cheapest sample with V(x); if none, x ← greedy
if V(x) then
    dispatch x
else
    solve (2) with a time limit
    if feasible, dispatch its plan; if infeasible, escalate with the certificate
    if timed out, escalate marked as uncertified
end if
```

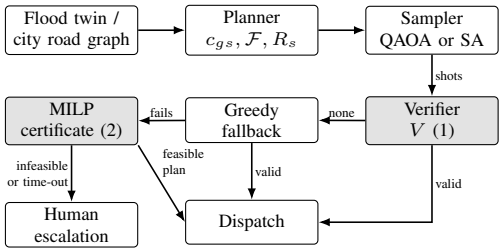


Fig. 1. Runtime-assurance loop. Shaded blocks are exact, and the sampler is never trusted. A human is called when the MILP proves that no valid plan exists, or, flagged as uncertified, when it runs out of time.

B. Runtime-Assurance Loop

Algorithm 1 gives the loop. It verifies every sample with (1) against the state at dispatch time, keeps the cheapest valid one, falls back to a greedy rule (largest group first to its cheapest shelter with seats left), and only then asks the MILP

$$\min_{\mathbf{x}} \sum_{g,s} c_{gs} x_{gs} \quad \text{s.t. (1)}, \ x_{gs} \in \{0,1\}. \quad (2)$$

If (2) is infeasible, escalation to a human is *certified*: the solver has proved that no valid plan exists, within its floating-point feasibility tolerance. This is a solver proof, not an independently checked one; a second solve with presolve off agreed on all 103 infeasible city instances. If it is feasible, the loop dispatches its plan instead of escalating. Section V-D also evaluates a solver-first variant with a deadline. If the solver stops at its time limit, the loop escalates but marks the case *uncertified*, so the officer knows that a plan may exist. A loop that escalates whenever the sampler and greedy rule fail, without asking the MILP, is the natural baseline; we call it the uncertified loop.

C. Shot Budget

If one shot is valid with probability q, the chance that N independent shots contain no valid plan is $(1-q)^N$, so

$$N \ \ge \ \frac{\ln \epsilon}{\ln(1-q)} \quad (3)$$

shots make that chance at most ϵ. Since q is unknown and changes with every event, the loop draws batches of $b = 8$ shots and stops at the first batch with a valid sample, up to $N = 64$. A wrong guess of q then costs shots or plan quality, while the verifier and certificate still stand behind every decision.

IV. Experimental Setup

Twin episodes. We replay 30 seeded episodes of a flood digital twin with four groups and three shelters (12 binary variables): the initial state, closure of road R5, a shelter surge of half its capacity, a further random closure, the failure of shelter A and, as a final stress, the failure of shelter B (180 re-planning events, 27 of them without any valid plan). QAOA uses a ring-XY mixer at depth 3, trained per event by COBYLA with layer-wise interpolation [20]. Simulated annealing runs on the same QUBO as 64 independent chains per call, one shot per chain, with 30 sweeps. Each event is sampled ten times with independent seeds, 64 shots per draw.

City instances. We built 360 instances on the OpenStreetMap road graphs of Delhi, Chennai, Mumbai, Kolkata, Guwahati and Patna, with the mapped zones and ten shelters per city, $G \in \{8, 16, 32\}$ groups (80–320 variables), demand of 60% or 90% of the seats left, and a disruption that closes the three most flood-exposed roads and fails one shelter. Travel times follow the prototype's router (flood- and traffic-weighted length at 25 km/h); capacities are building-type estimates from the city data, and group sizes are synthetic. Simulated annealing runs 64 chains of 40 sweeps per call, ten times per instance; on three instances per city, size and demand we repeated it with 400 sweeps. At this scale the annealer is the only sampler; QAOA is not simulated. All city results come from one run on a frozen copy of the city data, whose SHA-256 sums are released with the scripts. Enumeration of 10^G plans is impossible here, so the MILP is the only exact reference.

Metrics. Unsafe dispatch: the sample a naive loop would act on violates (1). We score three such integrations: the most frequent sample, the lowest-energy sample, and the lowest-energy sample among those with zero penalty, i.e. the samples that pass the encoding's own constraints. False escalation: a case escalated although (2) has a solution. Optimality gap: excess travel cost of the dispatched plan over the MILP optimum. Times are wall-clock on a laptop running three instances in parallel.

V. Results

A. Twin Episodes

Table I gives the twin results over 180 events and ten draws each. Dispatching the most frequent sample unchecked would have been unsafe in 29.1% of event draws for QAOA and 20.6% for simulated annealing. These include the 27 infeasible events, where any answer a sampler gives is wrong. The verified loop dispatched no invalid plan, escalated every infeasible event and no feasible one, and dispatched an optimal plan in 93.1% (QAOA) and 95.4% (annealing) of feasible draws. At this size the uncertified loop also behaved well (0.0% and 0.0% false escalations), because the greedy rule found a plan whenever the sampler did not. The MILP took a median of 6.9 ms against 1.4 ms for full enumeration, while one QAOA training took 13.0 s of simulation. Resampling events gives 95% intervals of 22.7–35.6% for QAOA and 14.3–26.4% for annealing. On the 153 solvable events, the top QAOA sample was unsafe more often than the top annealing sample in 24 events and less often in 7 (Wilcoxon signed-rank $p = 2.4 \times 10^{-4}$), so the difference holds across events.

TABLE I
Twin episodes: 180 events × 10 draws, 12 variables

Sampler, budget	Unsafe if unverified	Valid sample	Optimal dispatched	Shots used	False escal.
QAOA, 64 shots	29.1	97.1	93.1	64.0	0.0
QAOA, adaptive	28.8	97.1	68.8	18.0	0.0
SA, 64 shots	20.6	95.4	95.4	64.0	0.0
SA, adaptive	21.0	95.4	95.4	18.7	0.0

In % except shots. Valid: a valid sample among the shots (solvable events). False escal.: uncertified loop; the certified loop had none.

One episode with QAOA (seed 178, the one in which the greedy rule did the most work) shows the mechanism. In the first two events the trained state put almost all of its probability on valid plans. After the surge it put only 0.02 there, and after the second closure 0.00, so the most frequent sample was invalid in every draw from then on. After the surge the verifier still picked out a rare valid sample in some draws; otherwise the greedy rule supplied the plan, and no dispatched plan cost more than 5.3% above the optimum. When shelter B failed, the MILP proved that no plan existed and the loop escalated with a certificate.

In the initial state and after the first road closure the most frequent sample was almost always valid. The risk appeared once capacity became tight: after the shelter surge, a second closure and the failure of shelter A, the unsafe rate of QAOA rose from 23.7% to 33.0%, and that of annealing from 7.7% to 13.3%. After shelter B also failed, 27 of 30 events had no valid plan at all. Counting solvable events only, unverified dispatch would still have been unsafe in 16.6% (QAOA) and 6.5% (annealing) of draws.

B. City Scale

Table II and Fig. 2 give the city results. As the problem grew from 8 to 32 groups, simulated annealing produced a valid plan in 71.3% and then 17.0% of calls on solvable instances; Section V-C shows that at this scale most samples were not even complete assignments. Dispatching the top sample unchecked would have been unsafe in most calls at every size. With 8 groups at 90% demand each group is about as large as the free seats of an average shelter, and only 9 of 60 instances had a valid plan. The uncertified loop escalated 4.4% of solvable cases overall (11.1% at 90% demand, 0.0% at 60%), because the greedy rule also fails when capacity is tight. Where the greedy rule did find a plan, its median cost was 7.6% above the optimum. The MILP settled 360 of the 360 instances, finding the optimal plan or proving that none exists; the slowest took 40.8 s, well inside the 60 s limit.

The certificate matters most where infeasibility is not obvious: of the 103 city instances without a valid plan, 53 had a group with no allowed shelter, but 50 had neither such a group nor a total shortage of seats, so only the MILP could show

TABLE II
CITY INSTANCES ON OPENSTREETMAP ROAD GRAPHS (6 CITIES)

G	vars	demand	feasible inst.	valid sample %	unsafe %	false esc. uncert. %	MILP s (max)
8	80	60%	53/60	68.3	55.7	0.0	0.73
8	80	90%	9/60	88.9	86.7	11.1	0.64
16	160	60%	51/60	39.4	85.0	0.0	1.33
16	160	90%	44/60	28.9	82.7	23.6	5.39
32	320	60%	50/60	18.0	85.0	0.0	13.88
32	320	90%	50/60	16.0	86.7	0.0	40.76

valid: verified plan in 64 SA shots; unsafe: top sample unchecked.
No run reached the 60 s limit.

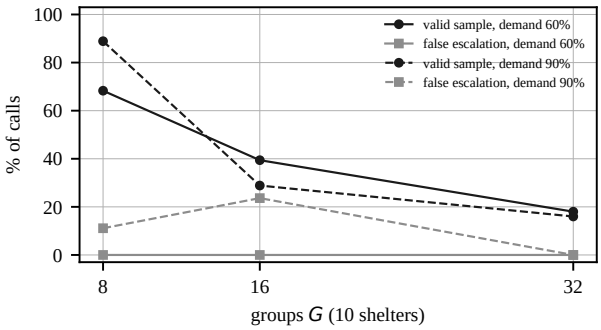


Fig. 2. City scale: share of calls in which the sampler produced a valid plan, and share of solvable cases an uncertified loop would escalate, against the number of groups.

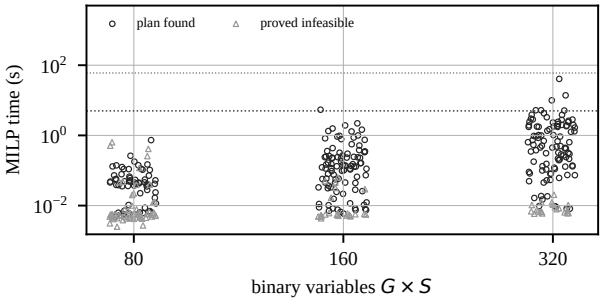


Fig. 3. Cost of the certificate: MILP solve time of every city instance (log scales, sizes jittered). The dotted line marks a 5 s deadline; every instance above it had a valid plan.

TABLE III
CITY INSTANCES BY CITY (60 INSTANCES EACH; % UNLESS NOTED)

City	Solvable	Valid sample	Unsafe	False esc. uncert.	Greedy found	MILP s (median)
Guwahati	58/60	93.1	12.7	0.0	100.0	0.01
Mumbai	50/60	21.6	96.7	3.8	96.0	0.15
Patna	50/60	5.2	100.0	6.0	94.0	0.23
Chennai	50/60	22.6	86.5	8.0	92.0	0.19
Delhi	44/60	30.2	85.8	3.4	95.5	0.06
Kolkata	5/60	40.0	100.0	20.0	80.0	0.01

that no plan exists. Fig. 3 shows what the certificate costs. The median MILP time rose from 0.01 s at 80 variables to 0.32 s at 320, so at district scale a typical certificate takes under a second; the cost lies in the rare slow instances. Resampling the solvable instances puts the false-escalation rate of the uncertified loop at 2.3–6.9% (95% interval). The certified loop never escalated a solvable case, but its plans were often not optimal: over 2,570 calls on solvable instances it dispatched an optimal plan in 37.0%, with a median gap of 4.4% and a 90th percentile of 28.7%, because the greedy rule supplied 1516 plans, the sampler 940 and the MILP 114.

Table III gives the same results per city. Unverified dispatch was unsafe in 12.7 to 100.0% of calls, depending on the city. In Kolkata the three closures cut one of the six zones off from every shelter, so any instance with a group there has no valid plan, and only 5 of 60 were solvable. Among the other five cities, Chennai had the most false escalations (8.0%) and the weakest greedy rule, which found a plan in 92.0% of its solvable instances. The failures of the uncertified loop therefore depend on the city network as well as on the problem size.

C. Why Unverified Samples Fail

Table IV classifies every unsafe top sample by the first rule of (1) it breaks. On the twin, 97.7% of the unsafe QAOA samples and 94.6% of the annealing samples overfilled a shelter although every pair of groups in it fitted, so the QUBO assigned them no penalty at all. Overloads with a penalized pair almost never reached the top, and the XY mixer never broke the one-hot rule. At city scale the bit-flip annealer's most frequent outcome, with every vector that is not one-hot counted as one outcome, was such a broken vector in 34.5% of unsafe draws at 8 groups, 86.6% at 16 and all of them at 32, while penalty-free overloads fell from 62.4% to none. On the twin the failures are encoding misses; at city scale they are mostly broken one-hot rows, which longer annealing did not turn into valid plans (Section V-D). The verifier catches both. The twin re-run that produced these classes reproduced the original flags in every draw; the city classes come from the same run as the city tables. Because this count pools all non-one-hot vectors, we also scored the raw vectors (most frequent vector, ties broken by energy): the top sample was then unsafe in 42.9, 77.9 and 83.0% of calls on solvable instances at 8, 16 and 32 groups, and over all calls at 8 groups 70.5% against 71.2% with pooling, so pooling did not change the picture.

D. Usual Practice and an Exact Solver First

Table V scores the integrations that sampler studies usually rely on. Taking the lowest-energy sample instead of the most frequent one lowered QAOA's unsafe rate on solvable twin events from 16.6% to 5.9%, and keeping only samples with zero penalty gave 5.9%; for annealing the three rates were 6.5, 5.9 and 5.9%. The remaining failures are the penalty-free overloads of Section V-C: they carry no penalty and can cost less than any valid plan, so no choice by energy can exclude them. At city scale the lowest-energy sample was unsafe in 71.2% of calls on solvable instances, and in 14.0% of calls no sample was penalty-free at all.

TABLE IV
FIRST RULE BROKEN BY THE UNSAFE TOP SAMPLES (% OF UNSAFE SAMPLES)

Sampler	Unsafe draws	One-hot broken	Forbidden pair	Overload penalized	Overload penalty-free
Twin, QAOA	524	0.0	1.9	0.4	97.7
Twin, SA	370	5.4	0.0	0.0	94.6
City, SA, $G = 8$	854	34.5	3.0	0.0	62.4
City, SA, $G = 16$	1006	86.6	0.0	0.0	13.4
City, SA, $G = 32$	1030	100.0	0.0	0.0	0.0

TABLE V
UNSAFE IF DISPATCHED UNVERIFIED, BY INTEGRATION (% OF DRAWS; CITY: % OF CALLS)

Dispatched sample	Twin, QAOA all	Twin, QAOA solvable	Twin, SA all	Twin, SA solvable	City, SA solvable
most frequent sample	29.1	16.6	20.6	6.5	72.4
lowest-energy sample	20.1	5.9	20.0	5.9	71.2
lowest-energy penalty-free sample	19.5	5.9	19.4	5.9	57.2
verified loop (this work)	0.0	0.0	0.0	0.0	0.0

We next compare sampler-first and solver-first loops. On the twin the MILP took a median 6.9 ms per event and one QAOA training 13.0 s (Section V-A); one annealing call of 64 chains, timed separately, took 32 ms. At city scale one annealing call took a median 0.32, 0.84 and 1.94 s at 8, 16 and 32 groups, against 0.01, 0.08 and 0.32 s for the MILP. The MILP was slower than one annealing call on 39 of the solved instances, including 20% of the solved 32-group instances, and the annealer found a valid plan on 1 of these 39. An exact-solver-first loop would therefore have been faster in median time and optimal, whereas the verified loop fell back to the greedy plan whenever the sampler failed, at a median 7.6% above the optimum at city scale. On 108 city instances (three per city, size and demand) an annealer with 400 instead of 40 sweeps found a valid plan in 70.2, 35.6 and 13.3% of calls on solvable instances at 8, 16 and 32 groups, against 74.2, 38.6 and 13.3% with 40 sweeps on the same instances; per instance it did better on 1 and worse on 5, at 3.8, 9.1 and 21.2 s per call. Longer annealing did not raise the valid rate.

A one-hot annealer. Most unsafe city samples broke the one-hot rule (Table IV), so we replaced the bit flips with moves that reassign one group, on the same energy, chains, sweeps and seeds, which keeps every sample one-hot. On solvable instances it found a valid plan in 85.2, 40.5 and 18.1% of calls at 8, 16 and 32 groups, against 71.3, 34.5 and 17.0% for bit flips (better on 41 instances, worse on 4, $p = 9.0 \times 10^{-7}$). Its top sample was still unsafe in 70.8 to 85.9% of all calls, and the uncertified loop's false escalations changed by less than one point. Of its unsafe top samples, 77% overloaded a shelter without any penalty and 23% used a forbidden pair, so the encoding's blind spot causes most of its failures and the search the rest. Retuning the bit-flip annealer on 108 instances helped only at small sizes: with the penalty weight scaled by 0.25 to 4, or a temperature schedule scaled to the costs, its valid rate ranged over 71.1–78.9, 33.1–39.3 and 13.3–13.3% at 8, 16 and 32 groups; at 32 groups every setting succeeded on the same 4 instances.

Solver first, with a deadline. We replayed the city calls with the MILP started first and the sampler and greedy rule run alongside: the loop waits at most d for the MILP and otherwise dispatches the cheapest verified fallback plan, or escalates marked uncertified. It dispatched an optimal plan in 74.3, 82.5, 91.4 and 97.3% of calls on solvable instances for $d = 0.5$, 1, 2 and 5 s, against 37.0% for the sampler-first loop, and escalated at most 0.78% of solvable cases uncertified. This is an offline replay from the measured solve times, and it ignores the incumbent a stopped solver returns. Re-solved with real time limits on a second, faster computer, HiGHS returned a valid plan on every solvable instance within 0.5 s, the optimum on 96.1% (98.4% within 1 s), and proved all 103 infeasible instances infeasible.

E. Shot Budget

With the adaptive budget the twin loop used on average 18.0 (QAOA) and 18.7 (annealing) shots per event instead of 64 and took the same escalation decision in every draw. Plan quality did change for QAOA: it dispatched an optimal plan in 68.8% of feasible draws against 93.1% with the full budget, because the loop keeps the cheapest valid sample of the first successful batch rather than of all 64 shots. Annealing dispatched an optimal plan whenever it found a valid one, with either budget, so its rate stayed at 95.4%. At city scale the adaptive rule used 50.0 shots per call, more than on the twin, because valid samples are rarer there. By (3), a sampler with $q = 0.05$ needs 90 shots for $\epsilon = 0.01$, more than the 64 used here.

VI. DISCUSSION AND LIMITATIONS

We measure sampler quality and loop safety separately. Safety holds by construction whenever every sample is verified, a classical plan is always available and the certificate finishes in time, and it holds for any sampler plugged in. The sampler decides how often the exact components have to step in. At city scale the pairwise capacity QUBO broke down and the sampler's valid-plan rate fell to 17.0% at 32 groups, so an uncertified loop would have woken an officer for cases that a MILP solved in seconds. At every size we tested, calling the MILP first would have been faster in median time and optimal whenever it finished; the samplers served only as stand-ins for future hardware, and the loop applies unchanged to any sampler.

The MILP can also time out. No run reached our 60 s limit, but deadlines of 1, 2, 5, 10 and 30 s would have stopped 45, 22, 7, 2 and 1 city instances with neither plan nor proof, and all of them had plans. An implementation that reads a time-out as "no plan" would have escalated them with a false certificate.

We draw four rules from these results:

1) Verify every sample against the state at dispatch time. Even on solvable twin events the top sample was unsafe

in 6.5–16.6% of draws, and the best penalty-free sample in 5.9%; at city scale most calls were unsafe.
2) Ask an exact solver before calling a human, and call it first whenever it fits the deadline. Without it, 4.4% of solvable city cases reached an officer, and the greedy fallback cost a median 7.6% more than the optimum.
3) Set the solver limit from the decision deadline and report a time-out as unknown, never as infeasible.
4) Keep the full shot budget when plan quality matters. The adaptive budget never changed an escalation, but it lowered QAOA's rate of optimal plans from 93.1% to 68.8%.

Threats to validity. The penalty weight P follows the usual QUBO recipe [2]; rescaling it changed little, and the overloads that the pairwise term misses stay invisible at any weight. QAOA was trained per event with a fixed budget and simulated without noise at 12 variables, and the city study uses simulated annealing as its only sampler, so we expect a noisy hardware sampler to produce valid samples less often. Intervals resample events and instances, not draws.

City demand is synthetic, capacities are estimates by building type, and every city instance uses the same kind of disruption: three closed roads and one failed shelter. The MILP is exact, but the slowest 320-variable instance needed 40.8 s, and regional problems will hit any fixed limit more often. Escalation was tested for infeasibility caused by failures and closures, and no officer took part in the evaluation, so the cost of a false escalation to a real operations room is not measured here.

VII. Conclusion

Sampling optimizers can join a flood re-planning loop safely if the loop never trusts them. An exact verifier checks every sample, a greedy rule and a MILP stand behind the sampler, and a human is called when the MILP proves that no plan exists or runs out of time, the second case flagged as uncertified. Without verification, the most frequent sample would have been unsafe in 16.6% of draws on solvable twin events for QAOA and 6.5% for annealing, and choosing the lowest-energy or the best penalty-free sample did not remove the risk, because the encoding cannot see some overloads. Without certification, the loop escalated 4.4% of solvable city cases. With both, no invalid plan was dispatched, and the MILP settled 360 of 360 city instances within 40.8 s. At these sizes an exact solver alone was faster and optimal, so the samplers add no value yet; we claim no quantum advantage.

Acknowledgment

The authors thank the OpenStreetMap contributors for openly available map data. In line with the IEEE policy on AI-generated content, the authors disclose that Claude (Anthropic) was used to help edit and restructure the text of all sections and to draft the simulation, experiment and plotting scripts. All experiments use the authors' own software and fixed seeds. The authors checked every number, claim and reference and take full responsibility for the content.

References

[1] A. Lucas, "Ising formulations of many NP problems," *Front. Phys.*, vol. 2, Art. no. 5, 2014, doi: 10.3389/fphy.2014.00005.
[2] F. Glover, G. Kochenberger, and Y. Du, "Quantum bridge analytics I: A tutorial on formulating and using QUBO models," *4OR*, vol. 17, no. 4, pp. 335–371, 2019, doi: 10.1007/s10288-019-00424-y.
[3] A. R. Cadeliña *et al.*, "D-Wave implementation of quantum annealing for optimal resource allocation in disaster response operation of Marikina City," *ECTI Trans. Comput. Inf. Technol.*, vol. 18, no. 1, pp. 24–33, 2024, doi: 10.37936/ecti-cit.2024181.253577.
[4] A. Abbas *et al.*, "Challenges and opportunities in quantum optimization," *Nat. Rev. Phys.*, vol. 6, pp. 718–735, 2024, doi: 10.1038/s42254-024-00770-9.
[5] L. Sha, "Using simplicity to control complexity," *IEEE Softw.*, vol. 18, no. 4, pp. 20–28, 2001, doi: 10.1109/MS.2001.936213.
[6] A. Desai, S. Ghosh, S. A. Seshia, N. Shankar, and A. Tiwari, "SOTER: A runtime assurance framework for programming safe robotics systems," in *Proc. 49th Annu. IEEE/IFIP Int. Conf. Dependable Syst. Netw. (DSN)*, 2019, pp. 138–150, doi: 10.1109/DSN.2019.00027.
[7] M. Alshiekh, R. Bloem, R. Ehlers, B. Könighofer, S. Niekum, and U. Topcu, "Safe reinforcement learning via shielding," in *Proc. AAAI Conf. Artif. Intell.*, vol. 32, no. 1, 2018, pp. 2669–2678, doi: 10.1609/aaai.v32i1.11797.
[8] E. Farhi, J. Goldstone, and S. Gutmann, "A quantum approximate optimization algorithm," arXiv:1411.4028, 2014.
[9] S. Hadfield, Z. Wang, B. O'Gorman, E. G. Rieffel, D. Venturelli, and R. Biswas, "From the quantum approximate optimization algorithm to a quantum alternating operator ansatz," *Algorithms*, vol. 12, no. 2, Art. no. 34, 2019, doi: 10.3390/a12020034.
[10] S. Kirkpatrick, C. D. Gelatt, and M. P. Vecchi, "Optimization by simulated annealing," *Science*, vol. 220, no. 4598, pp. 671–680, 1983, doi: 10.1126/science.220.4598.671.
[11] M. Leucker and C. Schallhart, "A brief account of runtime verification," *J. Log. Algebr. Program.*, vol. 78, no. 5, pp. 293–303, 2009, doi: 10.1016/j.jlap.2008.08.004.
[12] K. L. Hobbs, M. L. Mote, M. C. L. Abate, S. D. Coogan, and E. M. Feron, "Runtime assurance for safety-critical systems: An introduction to safety filtering approaches for complex control systems," *IEEE Control Syst. Mag.*, 2023; preprint arXiv:2110.03506.
[13] R. Parasuraman, T. B. Sheridan, and C. D. Wickens, "A model for types and levels of human interaction with automation," *IEEE Trans. Syst., Man, Cybern. A, Syst. Humans*, vol. 30, no. 3, pp. 286–297, 2000, doi: 10.1109/3468.844354.
[14] J. R. McClean, J. Romero, R. Babbush, and A. Aspuru-Guzik, "The theory of variational hybrid quantum-classical algorithms," *New J. Phys.*, vol. 18, no. 2, Art. no. 023023, 2016, doi: 10.1088/1367-2630/18/2/023023.
[15] Z. Wang, N. C. Rubin, J. M. Dominy, and E. G. Rieffel, "XY mixers: Analytical and numerical results for the quantum alternating operator ansatz," *Phys. Rev. A*, vol. 101, no. 1, Art. no. 012320, 2020, doi: 10.1103/PhysRevA.101.012320.
[16] J. A. Montañez-Barrera, D. Willsch, A. Maldonado-Romo, and K. Michielsen, "Unbalanced penalization: A new approach to encode inequality constraints of combinatorial problems for quantum optimization algorithms," *Quantum Sci. Technol.*, vol. 9, no. 2, 2024, doi: 10.1088/2058-9565/ad35e4.
[17] H. D. Sherali, T. B. Carter, and A. G. Hobeika, "A location-allocation model and algorithm for evacuation planning under hurricane/flood conditions," *Transp. Res. B, Methodol.*, vol. 25, no. 6, pp. 439–452, 1991, doi: 10.1016/0191-2615(91)90037-J.
[18] Q. Huangfu and J. A. J. Hall, "Parallelizing the dual revised simplex method," *Math. Program. Comput.*, vol. 10, no. 1, pp. 119–142, 2018, doi: 10.1007/s12532-017-0130-5.
[19] M. Fox, A. Gerevini, D. Long, and I. Serina, "Plan stability: Replanning versus plan repair," in *Proc. 16th Int. Conf. Automated Planning Scheduling (ICAPS)*, 2006, pp. 212–221.
[20] L. Zhou, S.-T. Wang, S. Choi, H. Pichler, and M. D. Lukin, "Quantum approximate optimization algorithm: Performance, mechanism, and implementation on near-term devices," *Phys. Rev. X*, vol. 10, no. 2, Art. no. 021067, 2020, doi: 10.1103/PhysRevX.10.021067.