



# ARDOR PROFESSIONAL AUDIO + CONTROL I/O FOR RASPBERRY PI / CODEC ZERO



Rev B — fail-safe mute, bipolar audio ESD, protected guitar/line/amp, isolated MIDI, expression ADC

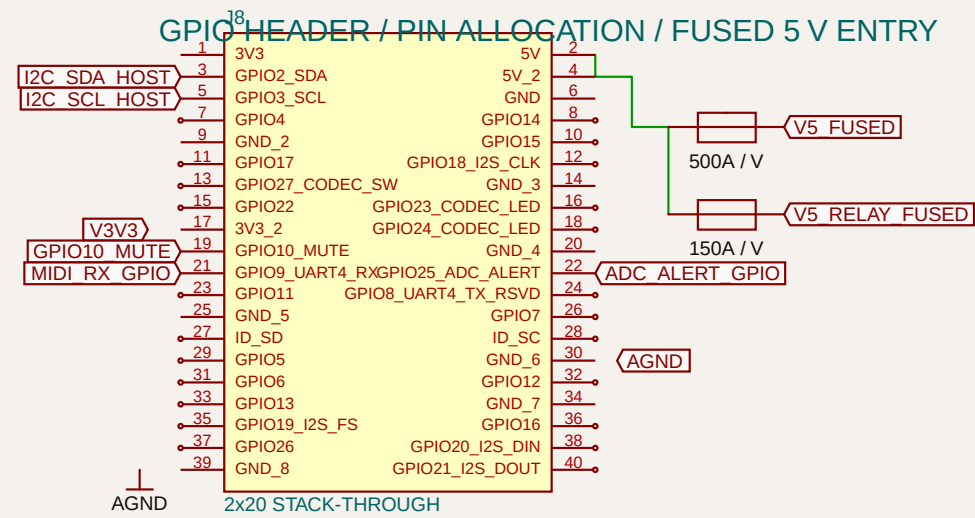


## 1. POWER / REFERENCE / CHASSIS

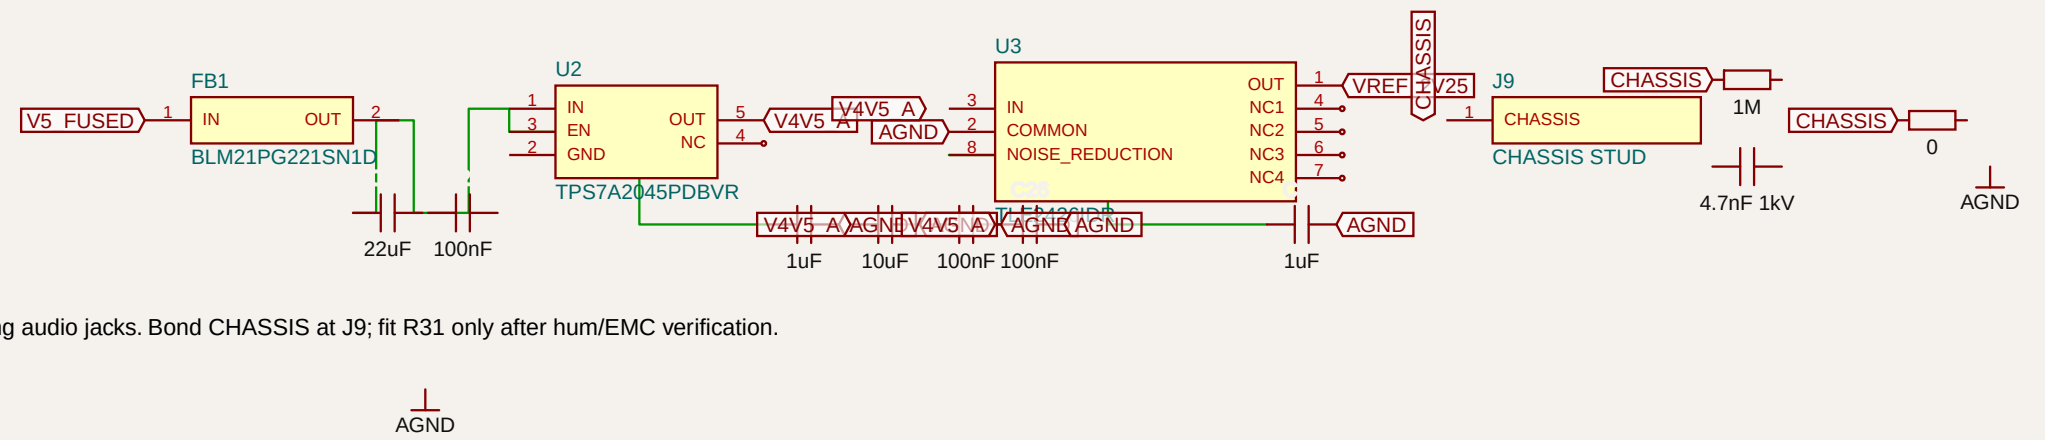

## 2. HIGH-Z GUITAR INPUT CODEC ZERO AUX IN

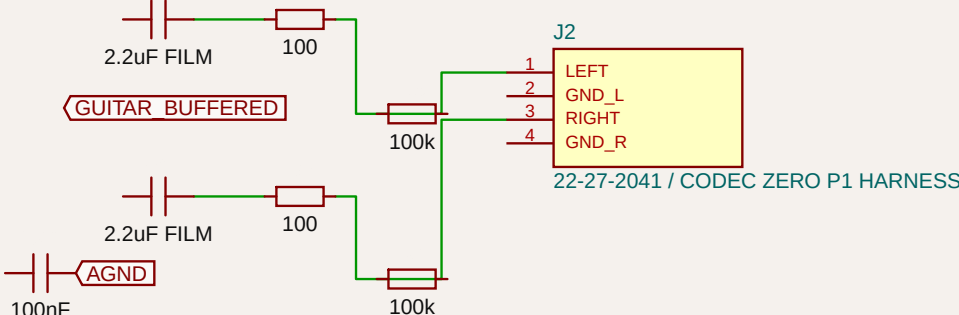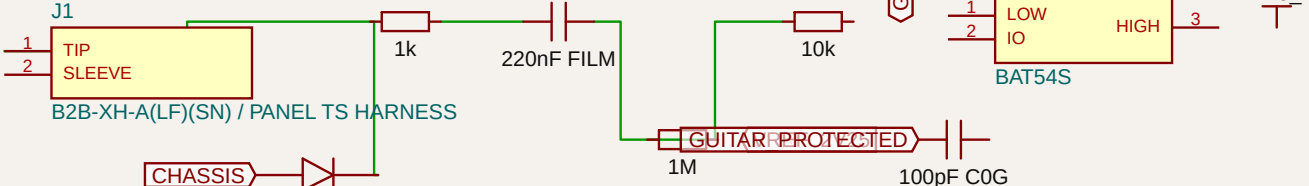


### 3A. CODEC ZERO AUX OUT STEREO LINE + MONO GUITAR AMP

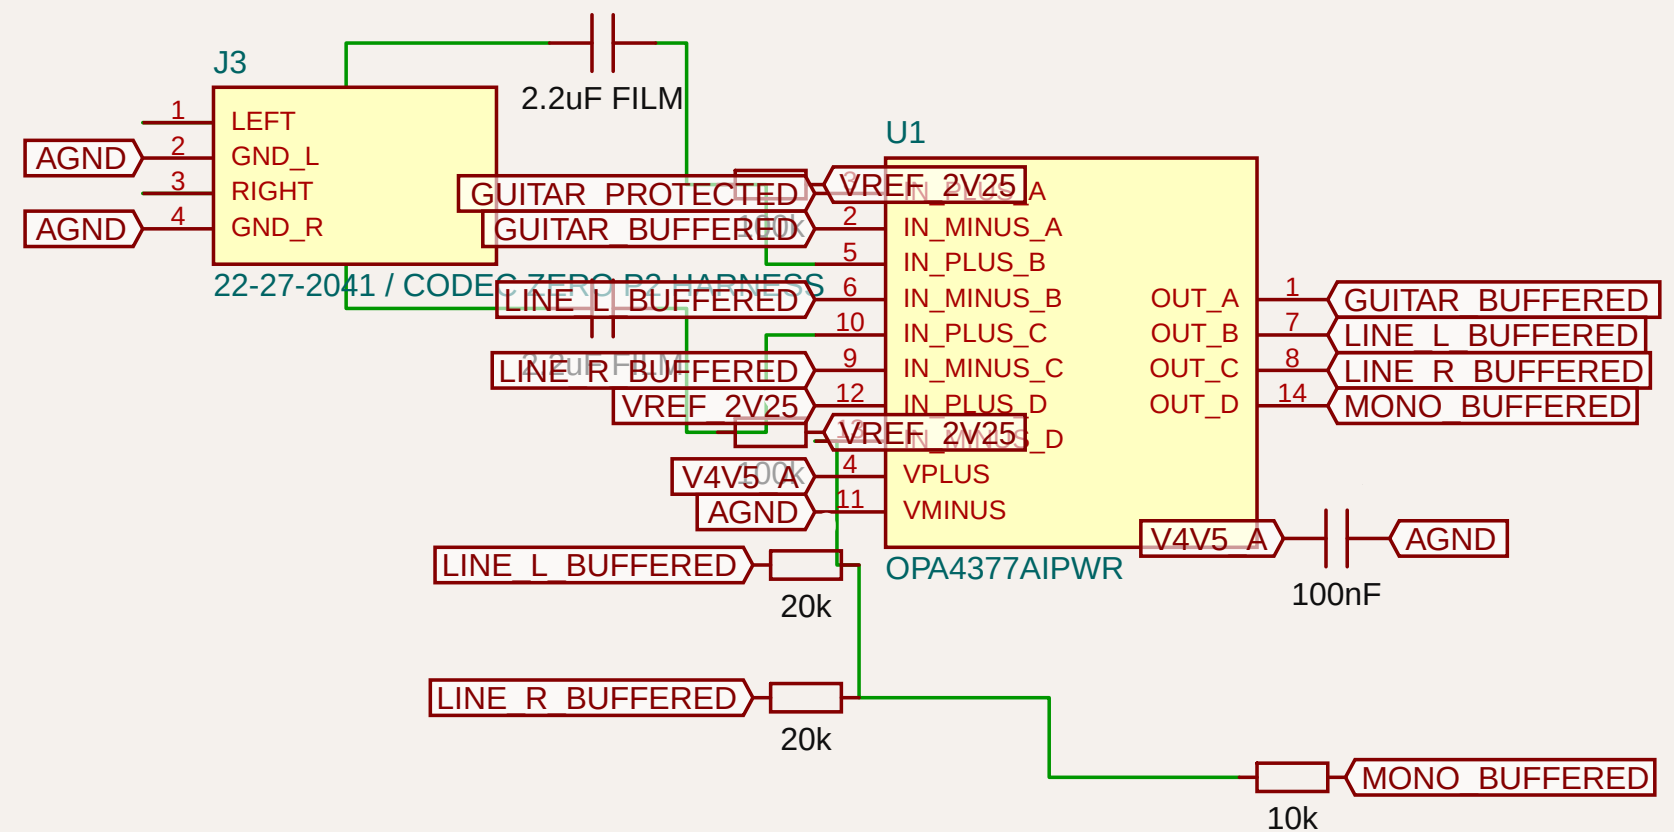


U1 is one OPA4377AIPWR in TSSOP-14; place 100nF directly at pins 4 and 11.

Codec P1/P2 pin order (square pin 1): LEFT, GND, RIGHT, GND. AUX maximum: 1 V RMS.

3B. FAIL-SAFE STEREO LINE + MONO GUITAR AMP OUTPUTS

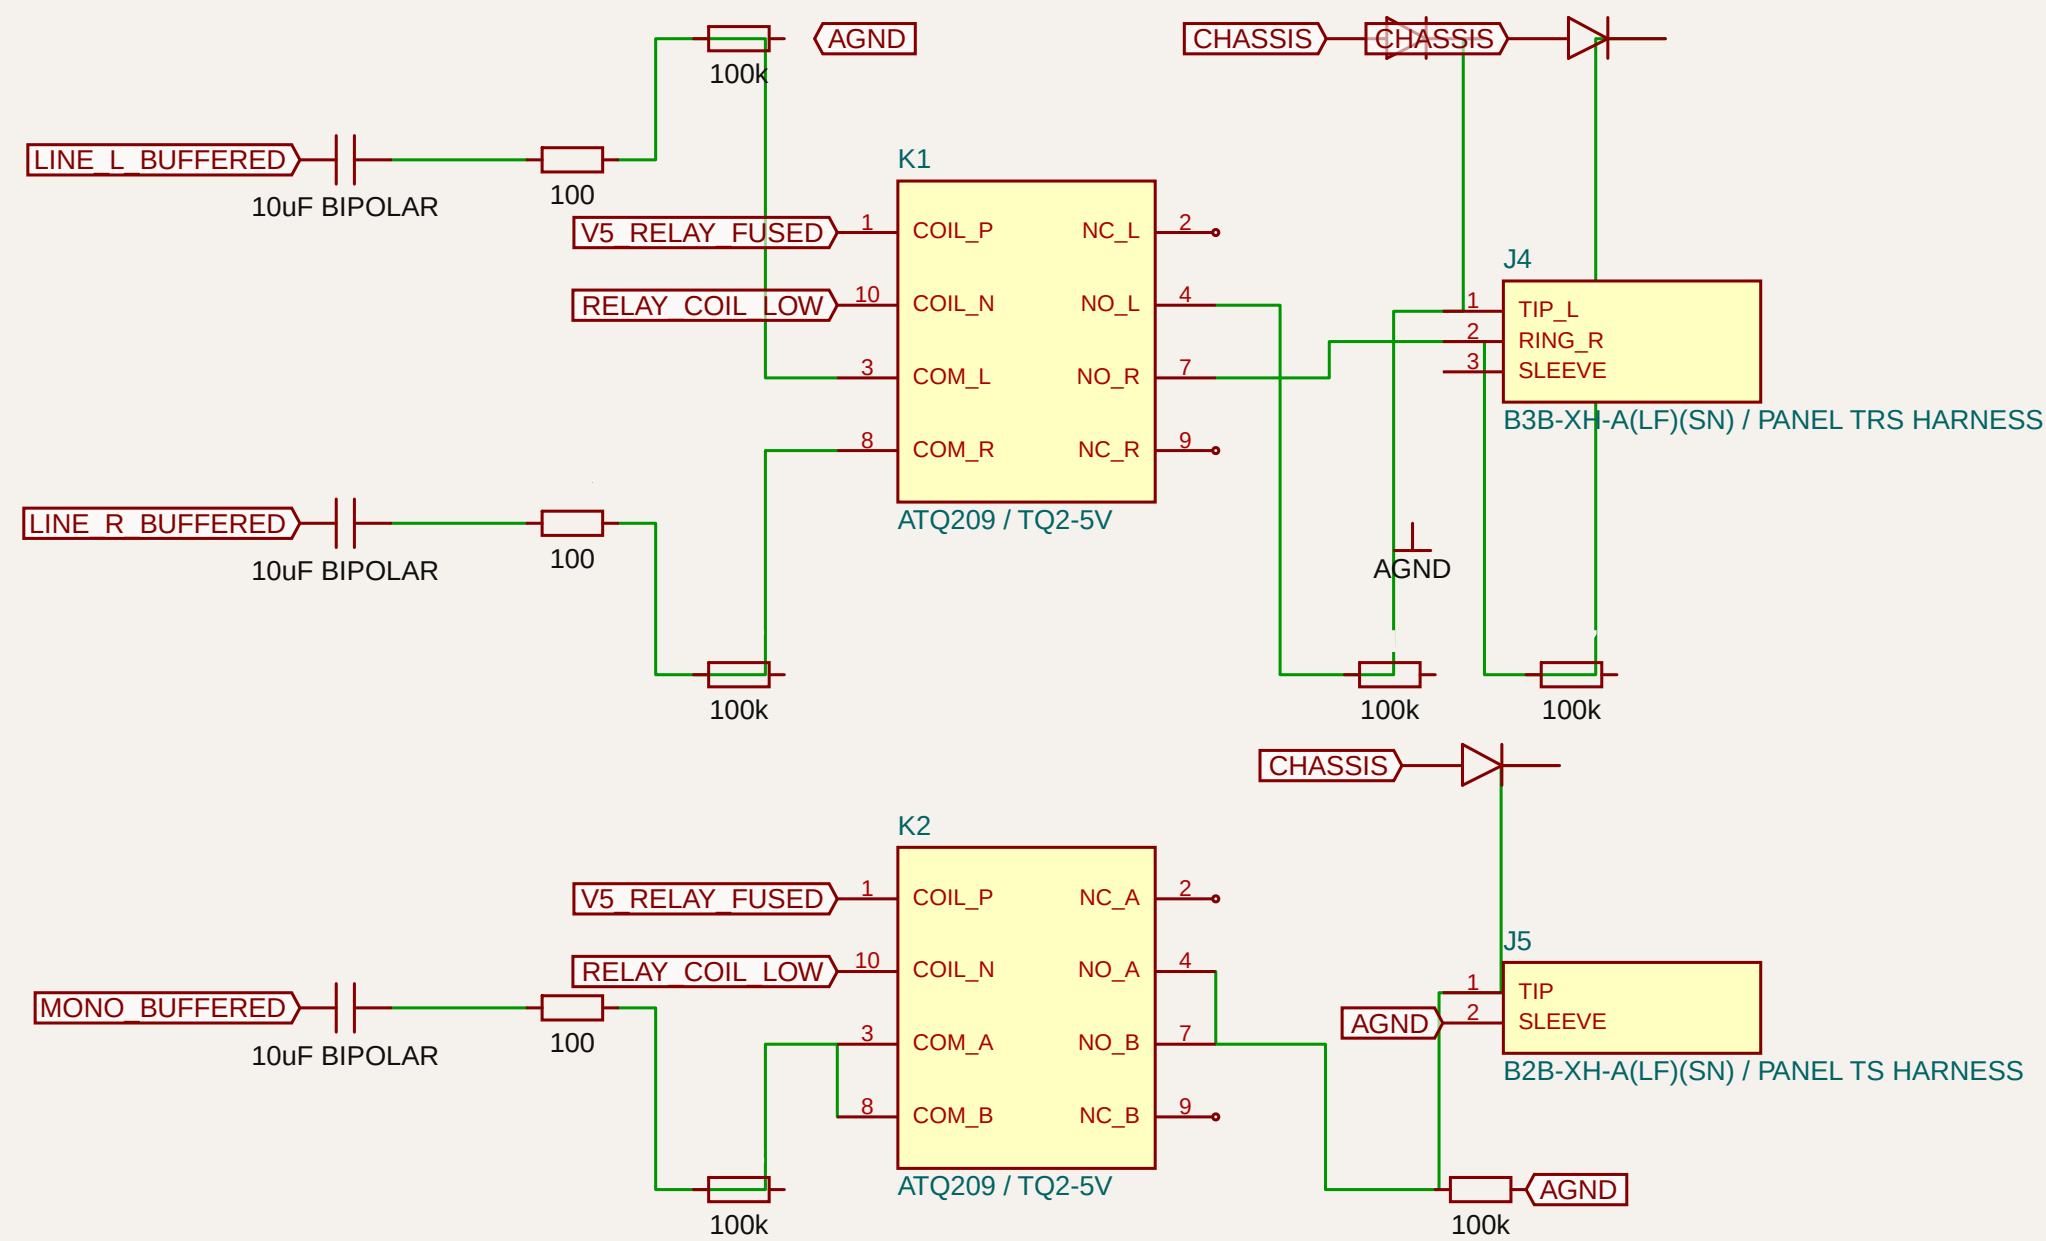


4. GALVANICALLY ISOLATED TRS MIDI INPUT

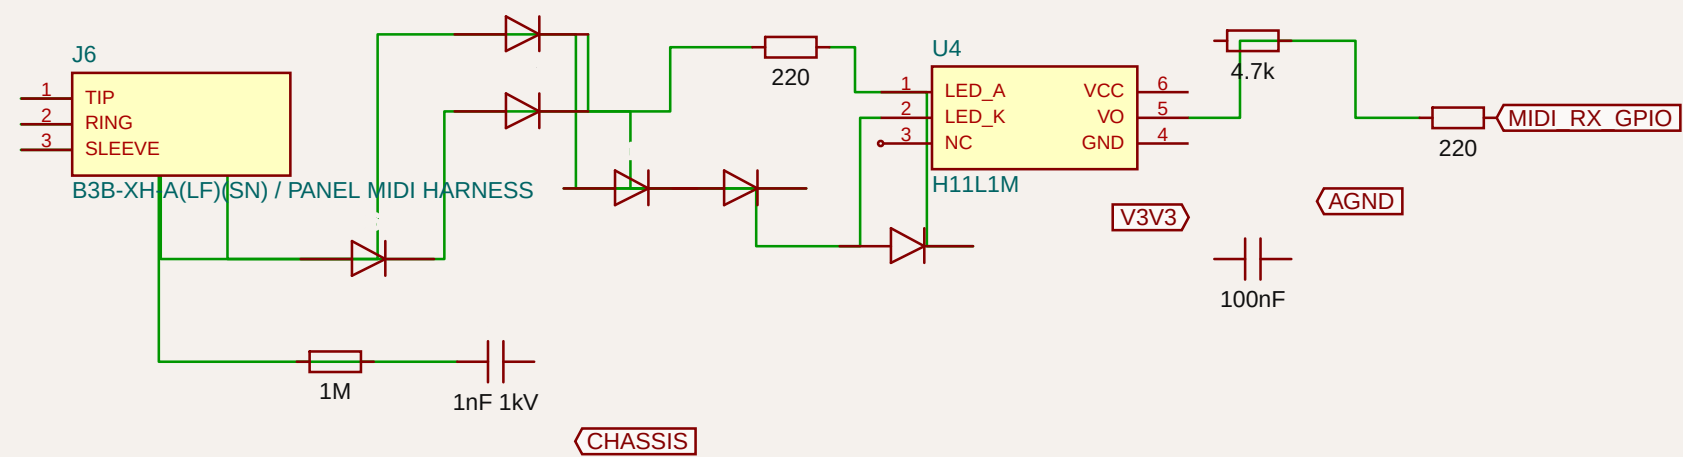


MIDI cable side is isolated: never join MIDI\_TIP/RING/SHIELD to AGND/DGND. No extra I2C pull-ups fitted.



## 5. PROTECTED PASSIVE EXPRESSION PEDAL INPUT

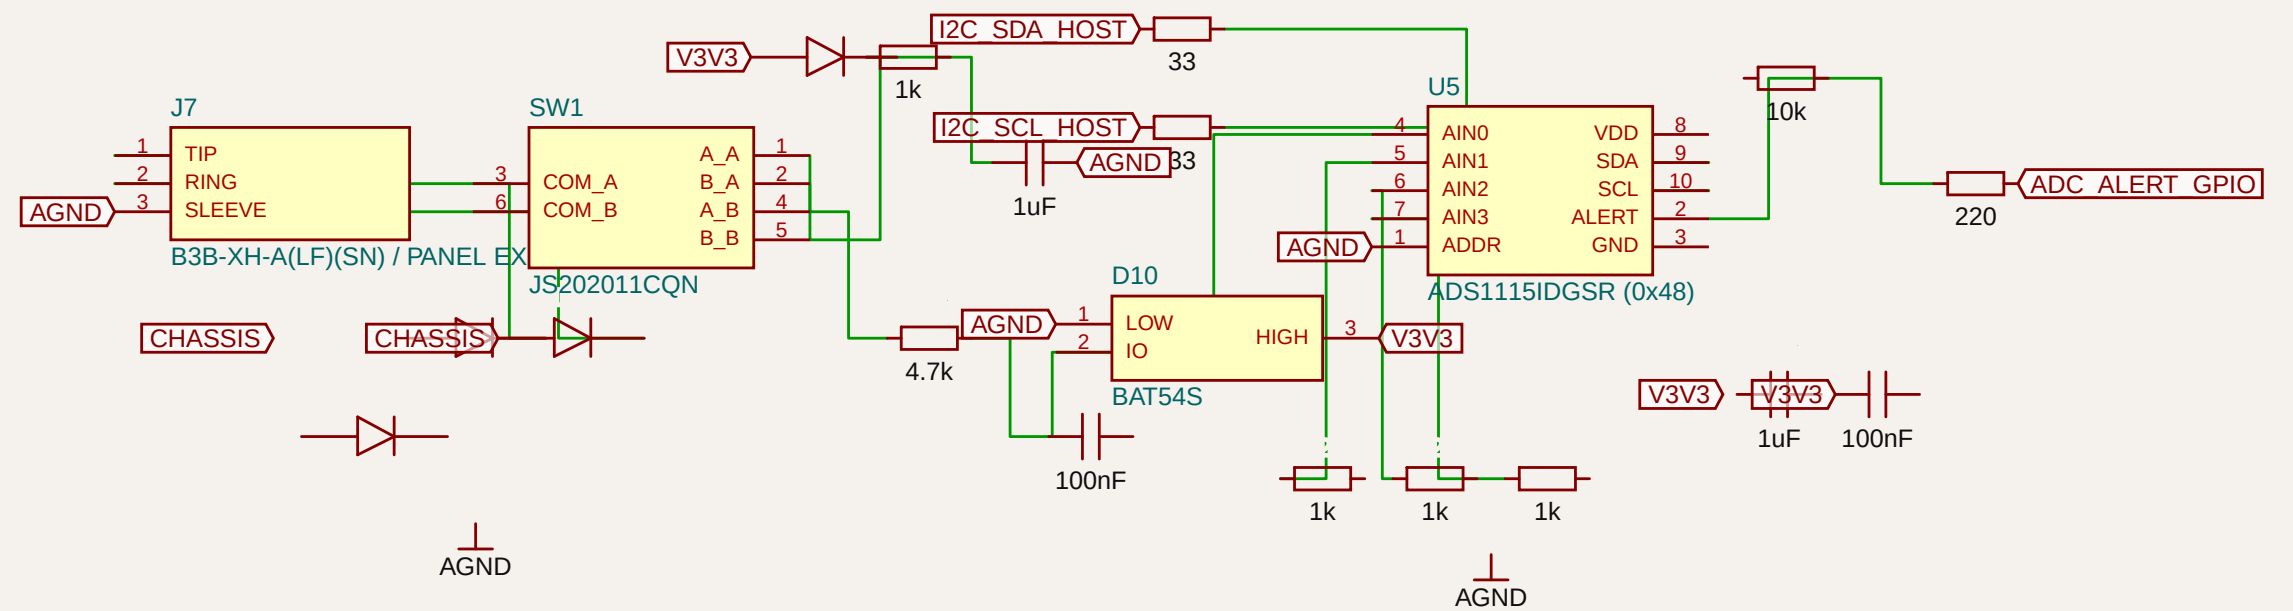

6. FAIL-SAFE OUTPUT MUTE

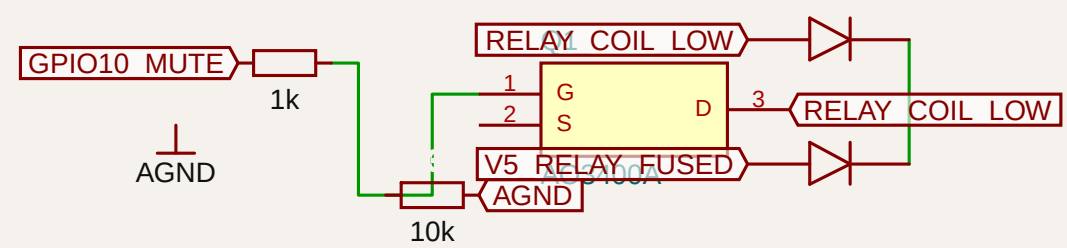

GPIO10 HIGH closes K1/K2 only after codec clocks and bias are stable; GPIO10 defaults LOW at reset.