ARDOR / INDEPENDENT FUNCTION MODULE

# Isolated MIDI input / 3.3 V UART / HAND ASSEMBLY

T1 | HAND ASSEMBLY | SEE PIN GUIDE AT RIGHT


PIN GUIDE: IN = into this board / OUT = out / I/O = both / GND = 0 V

J202 / MIDI IN
1: DIN4 IN  2: DIN5 IN

J203 / CASE BOND
1: CASE  2: GND 0V

J101 / PWR IN / UART OUT
1: 5V IN  2: 3V3 IN
3: GND 0V  4: UART OUT

U201.3: NC — LEAVE OPEN

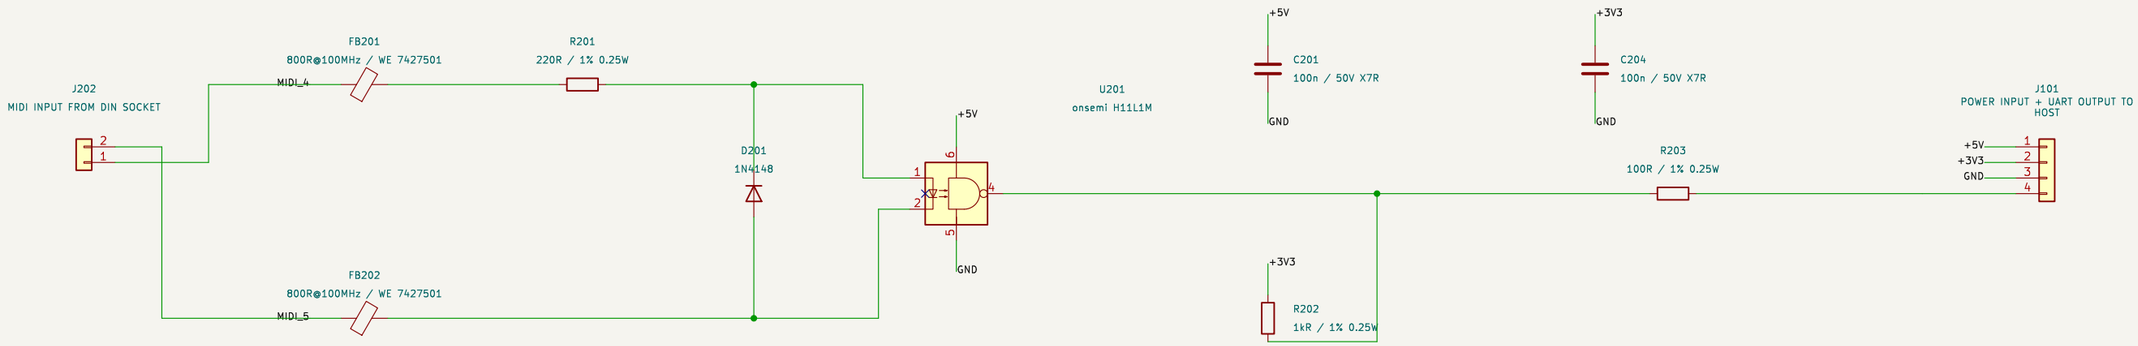





DIN panel socket: contact 4 -> J202.1; contact 5 -> J202.2. Pins 1/2/3 and shell unconnected.
Insulate DIN shell. J203.1 bonds the enclosure; R101 returns ESD to local GND.
Optocoupler LED current -> UART low. The output pull-up is 3.3 V, never 5 V.
Functional ground-loop isolation; transient clamps limit common-mode range. Not a safety isolator.

+3V3 +5V CHASSIS GND

Engineering prototype — bench validation required

**Ardor**

Sheet: /
File: Ardor_MIDI_THT.kicad_sch

***Title: Isolated MIDI input / 3.3 V UART / HAND ASSEMBLY***

| Size: A3 | Date: 2026-10-12 | **Rev: T1.1** |
|---|---|---|
| KiCad E.D.A. 9.0.2 | | Id: 1/1 |