


ARDOR PROFESSIONAL AUDIO + CONTROL I/O FOR RASPBERRY PI / CODEC ZERO

Rev B — fail-safe mute, bipolar audio ESD, protected guitar/line/amp, isolated MIDI, expression ADC

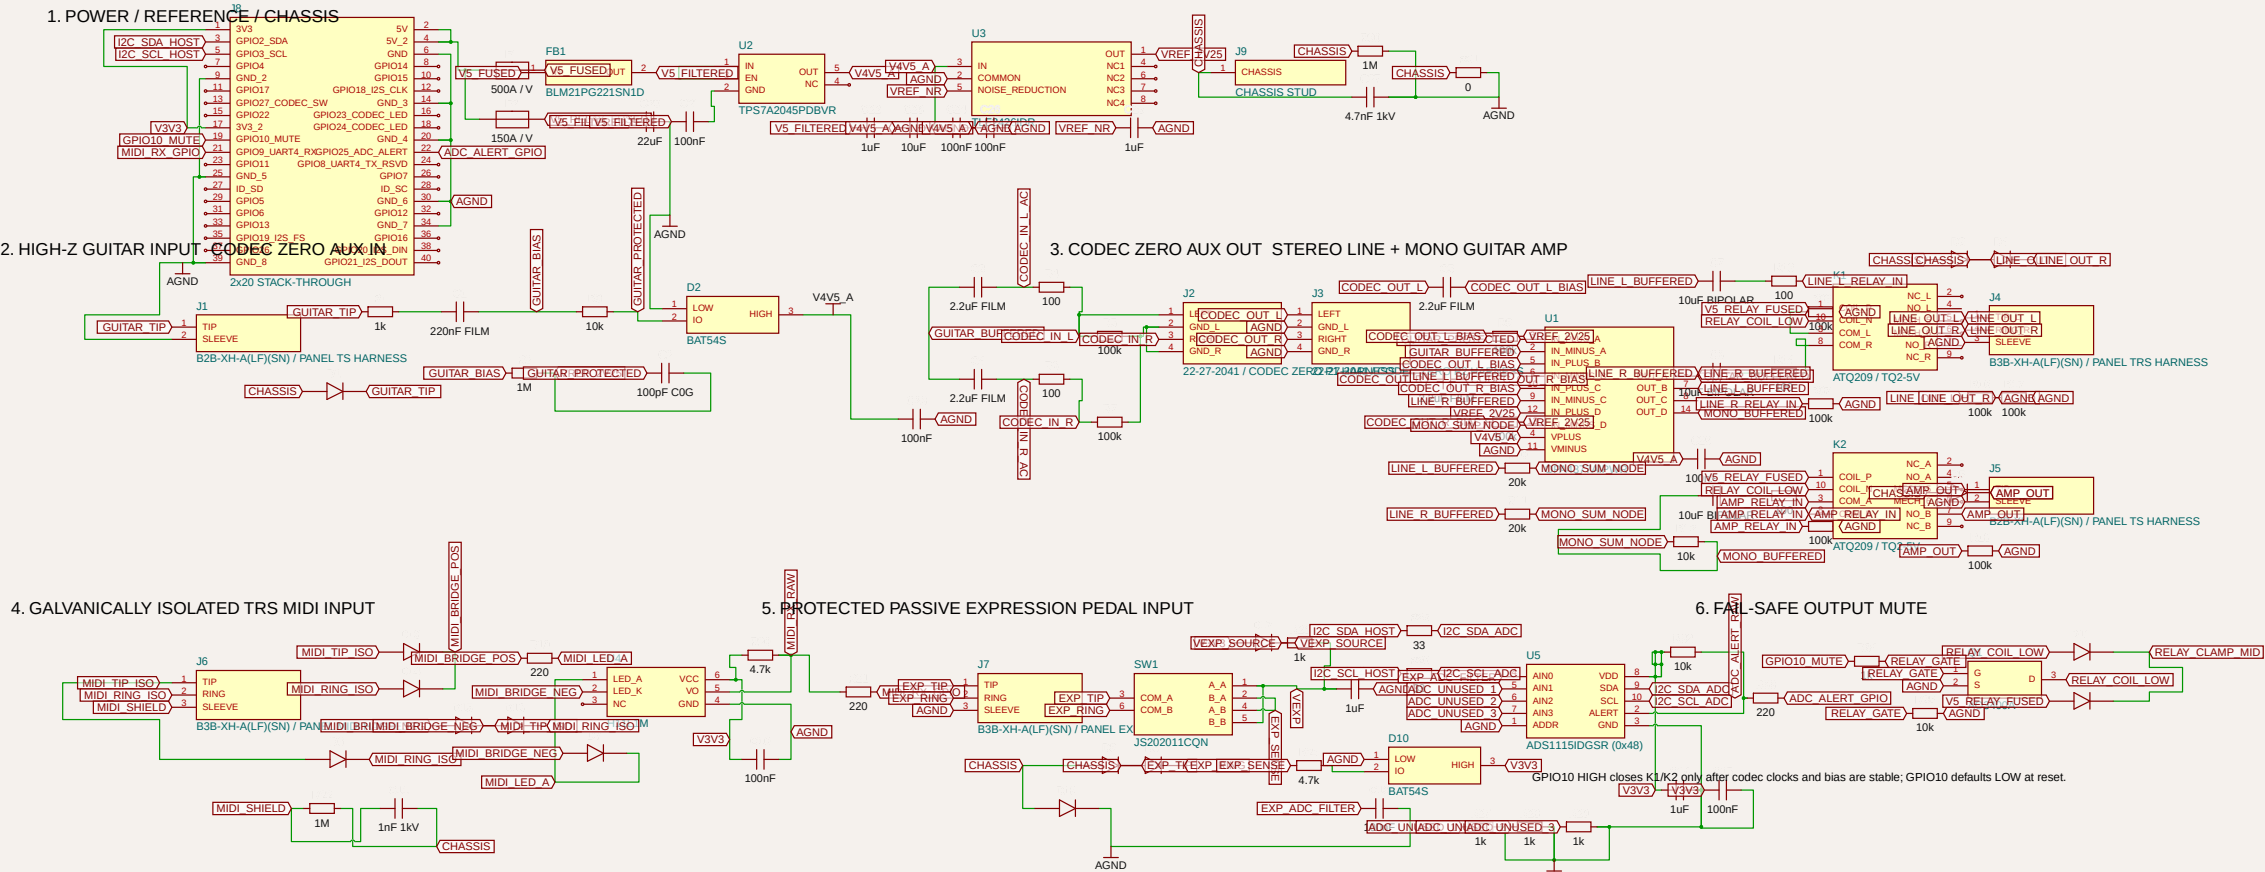

Use isolated-bushing audio jacks. Bond CHASSIS at J9; fit R31 only after hum/EMC verification.

U1 is one OPA4377AIPWR in TSSOP-14; place 100nF directly at pins 4 and 11.

MIDI cable side is isolated: never join MIDI_TIP/RING/SHIELD to AGND/DGND. No extra I2C pull-ups fitted.

Codec P1/P2 pin order (square pin 1): LEFT, GND, RIGHT, GND, AUX maximum: 1 V RMS.