

Stereo buffer / mono average / AC outputs / HAND ASSEMBLY


T1 | HAND ASSEMBLY | SEE PIN GUIDE AT RIGHT

PIN GUIDE: IN = Into this board / OUT = out / I/O = both / GND = 0 V

J101 / POWER IN
1: 5V IN 2: GND 0V

J102 / AUDIO IN
1: LEFT IN 2: GND 0V
3: RIGHT IN

J103 / AUDIO OUT
1: LEFT OUT 2: GND 0V
3: RIGHT OUT 4: MONO OUT

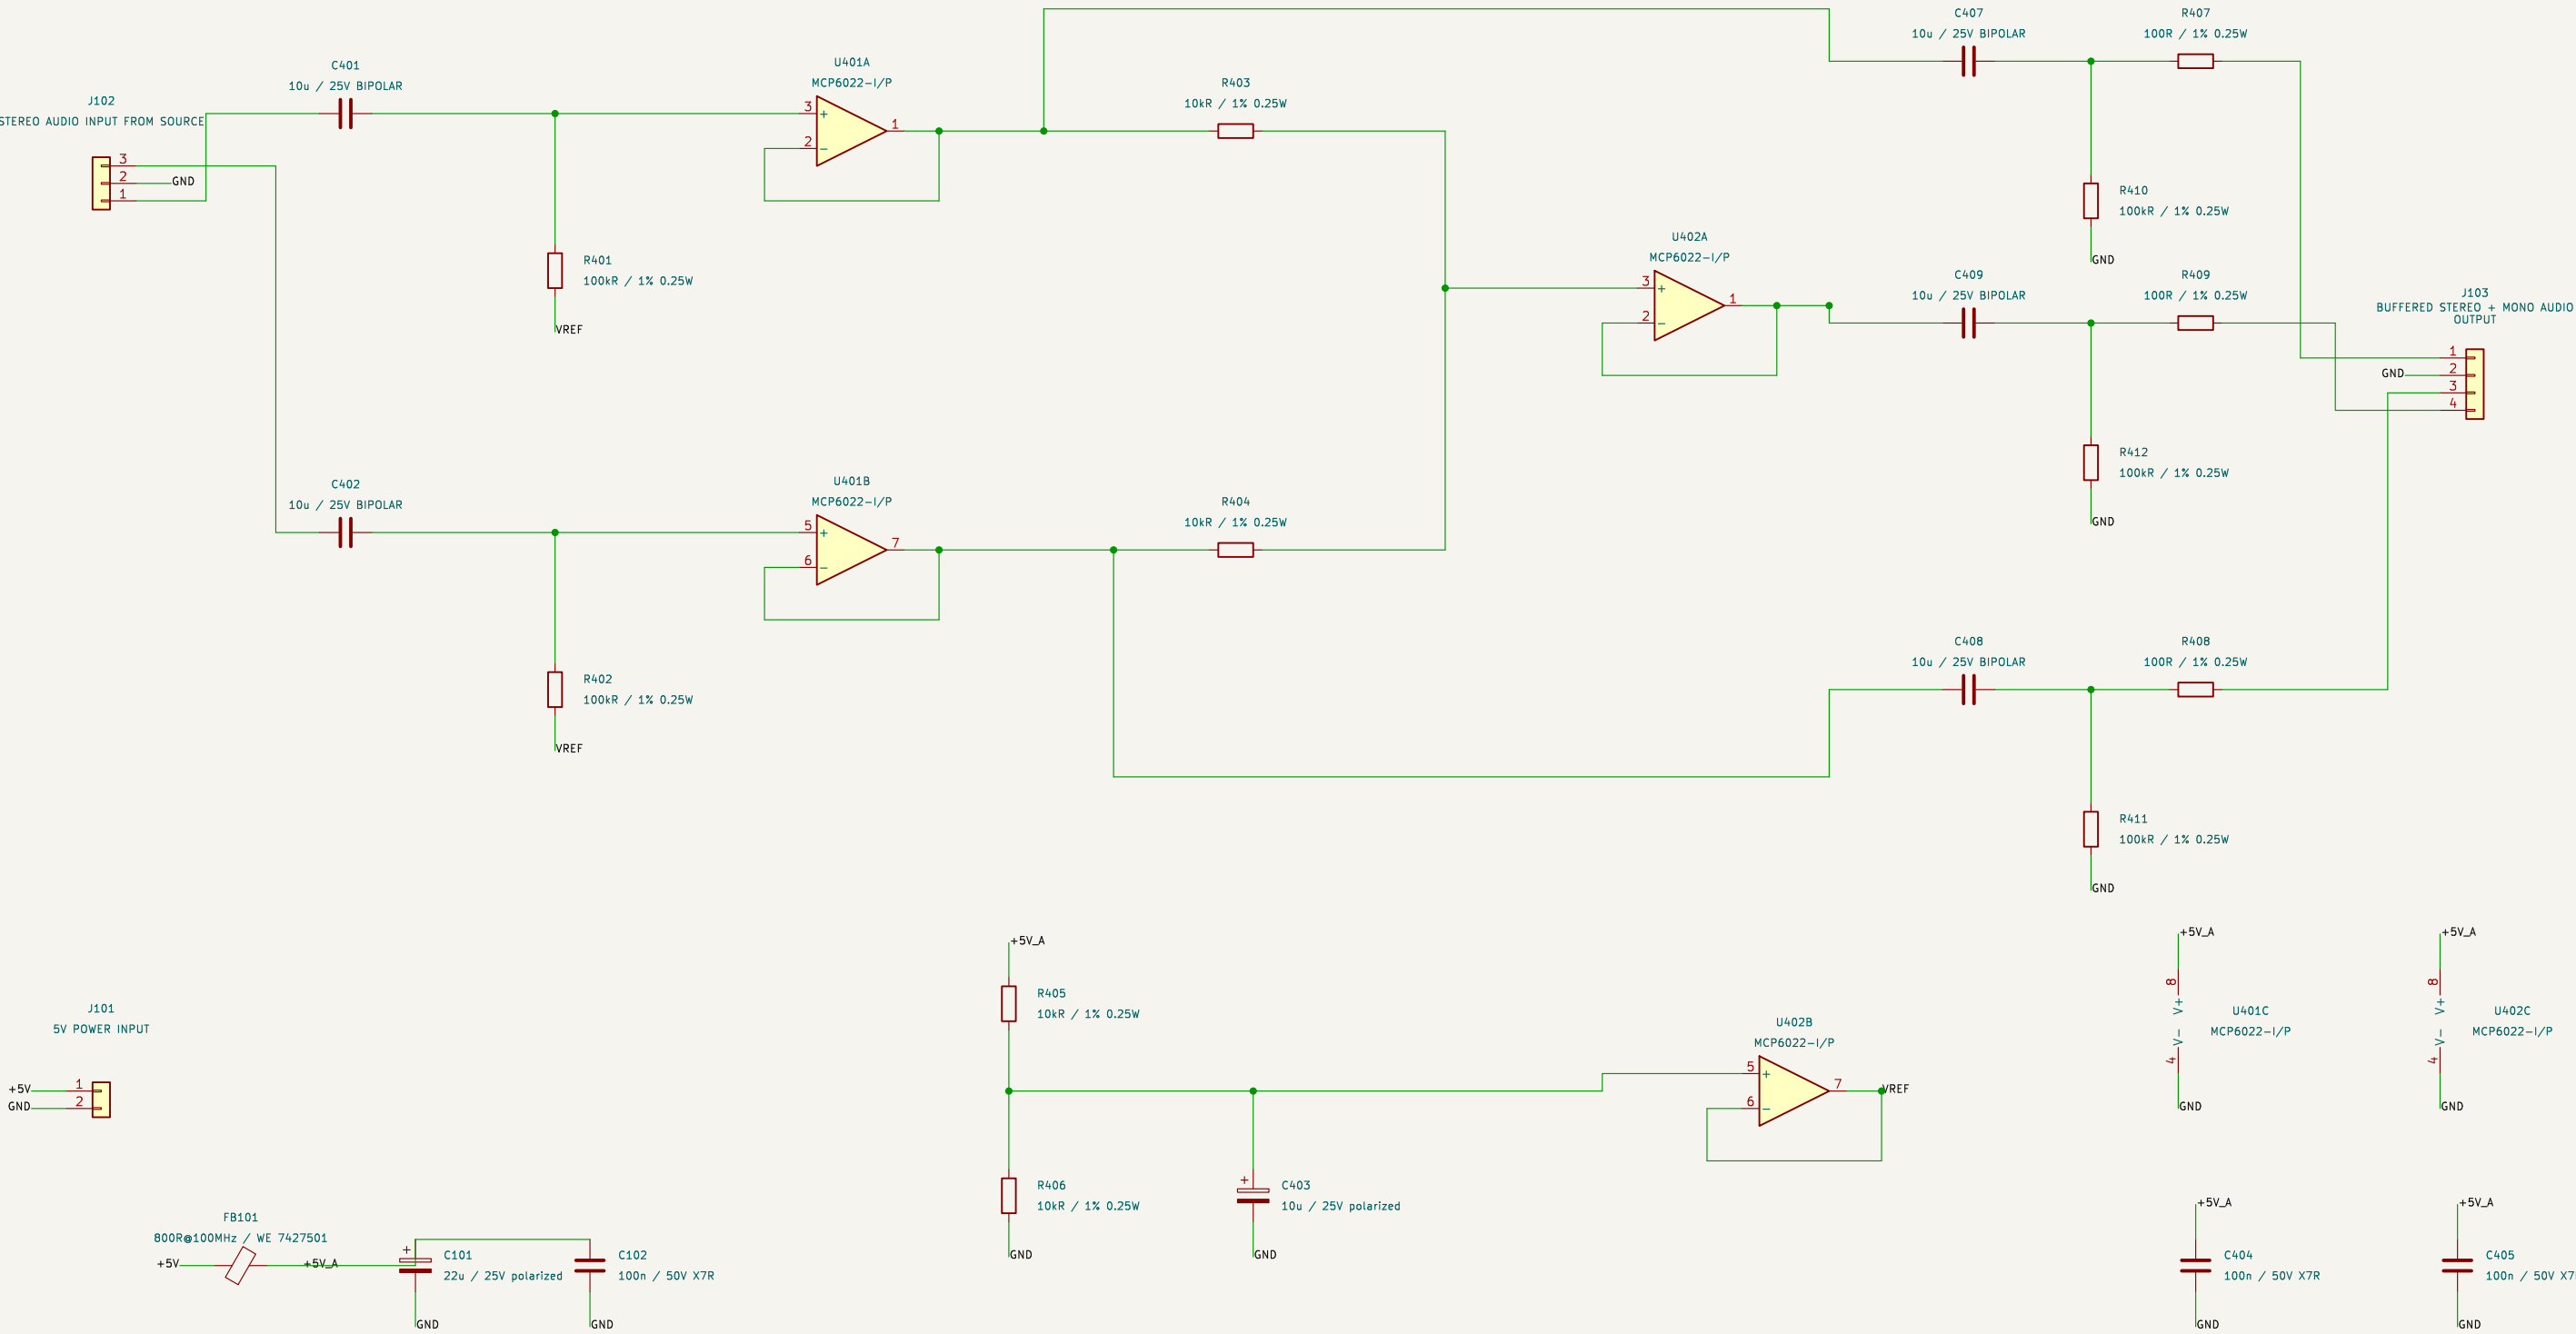

Line-level input ≤ 1 Vrms/channel. Output loads $\geq 10k$. Mono = $(L + R)/2$, unity buffers.
All three outputs AC coupled; no 2.5 V bias leaves this board. For mono input, feed both channels
or accept -6 dB when using one channel. Harness connectors are internal; add jack-entry ESD protection
for exposed ports. This board is neither an instrument preamp nor an ADC, headphone or power amplifier.

Engineering prototype – bench validation required

Ardor

Sheet: /
File: Ardor_Mixer_THT.kicad_sch

Title: Stereo buffer / mono average / AC outputs / HAND ASSEMBLY

Size: A3 Date: 2026-10-08

Rev: T1

KiCad E.D.A. 9.0.2

Id: 1/1