



01 Audio signal flow

Follow left to right. All six op-amp sections use +5V_A and GND; power pins are drawn at lower right.

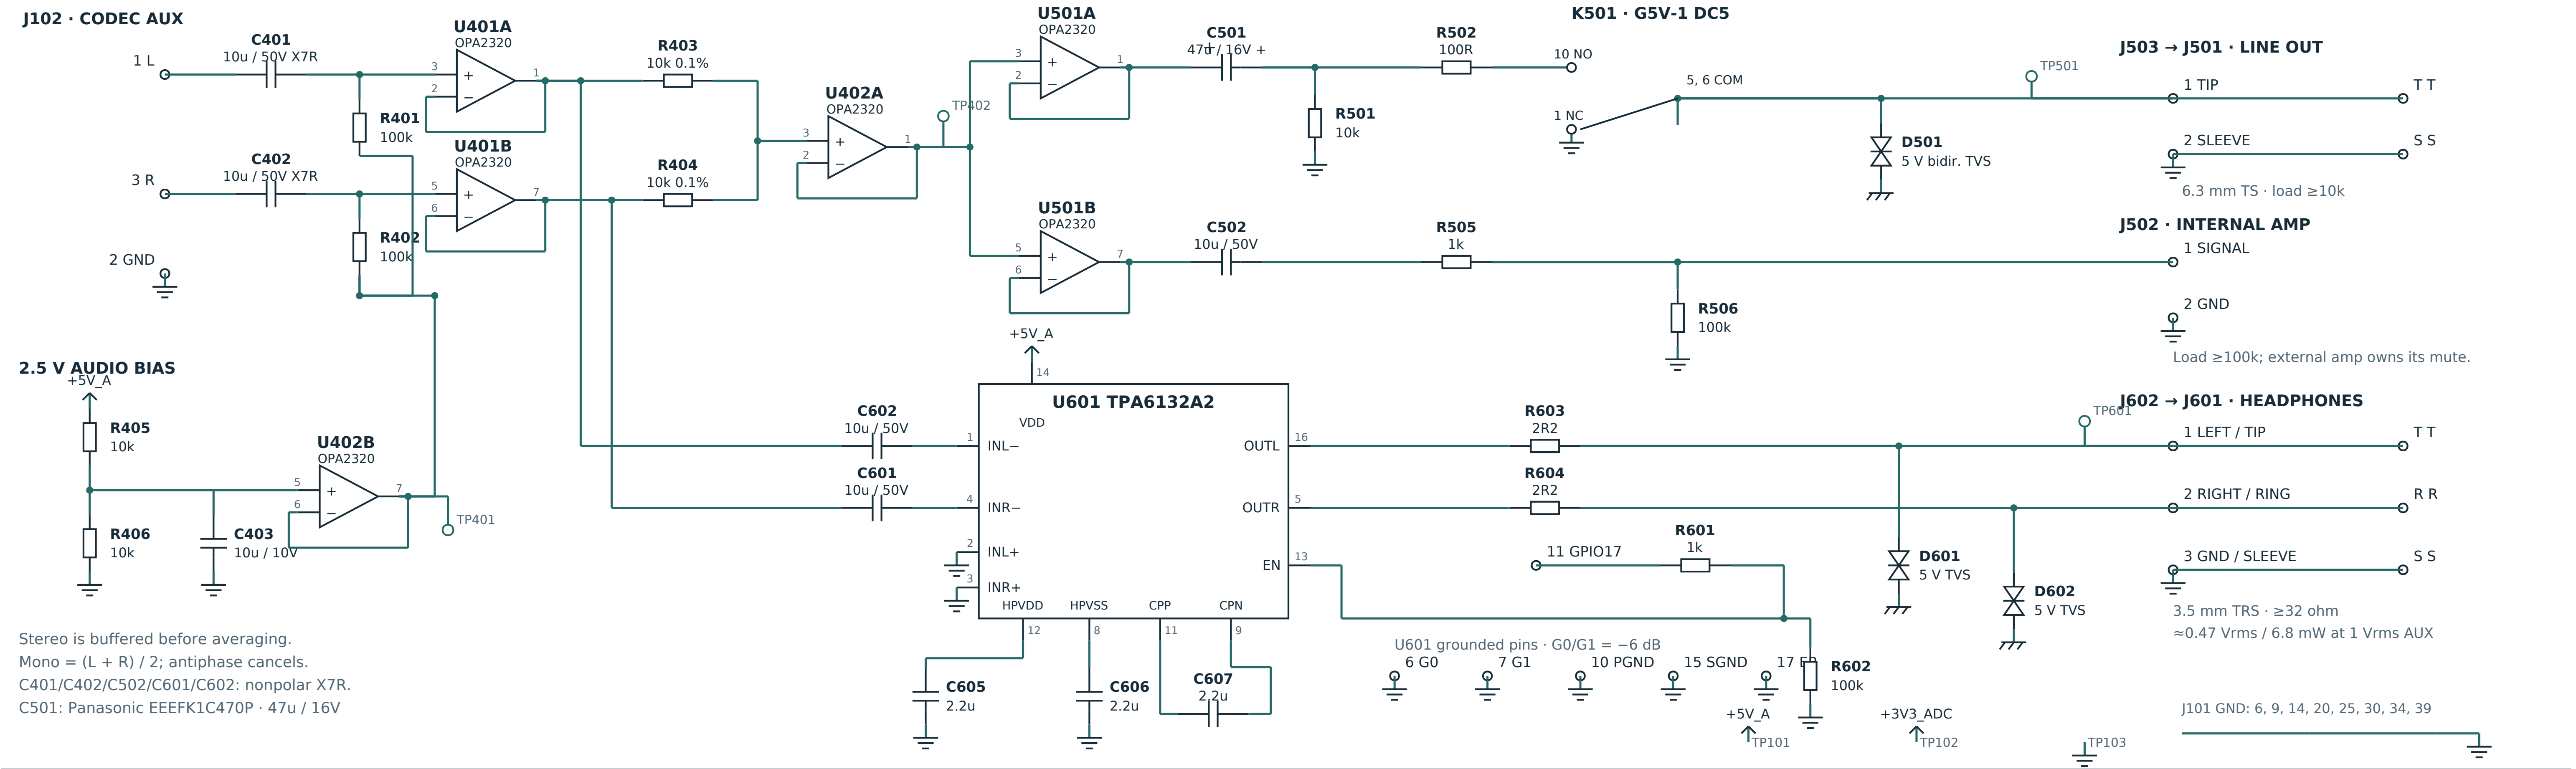


02 MIDI input

Floating current loop; optocoupler output is pulled up only to Pi 3.3 V.

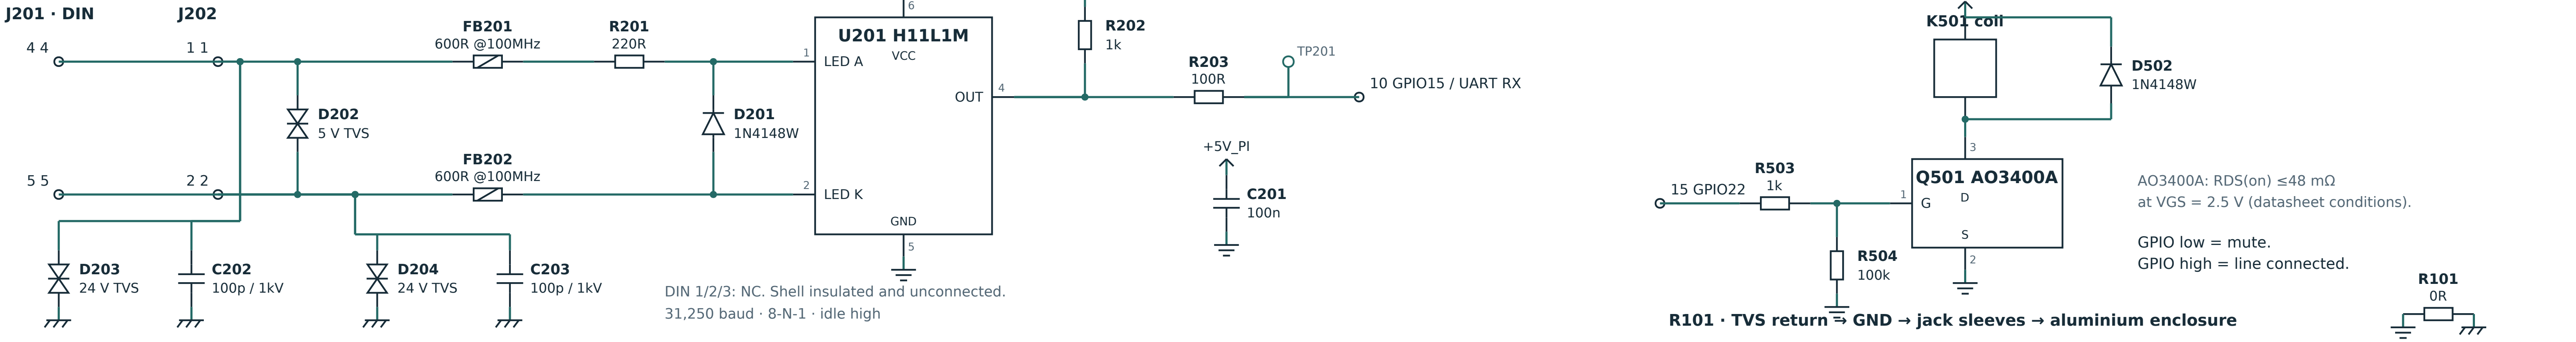

04 Passive expression pedal


JP301 normal: 1-3 + 2-4. Reversed: 3-5 + 4-6. Both shunts move together.

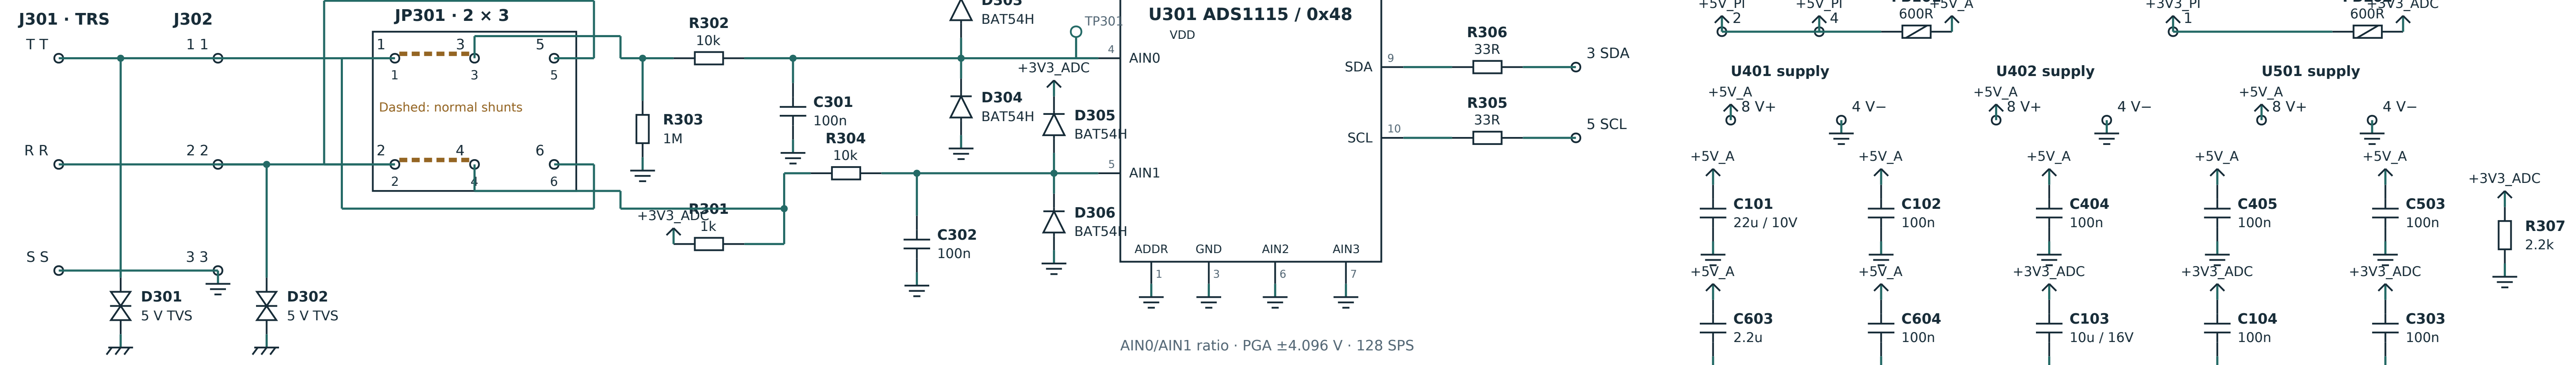

J101 is ONE 40-pin header shown in functional groups. Unused J101 pins, U201.3, U301.2 and DIN 1/2/3 are NC on this expansion.

05 Power & bypass

Rail symbols connect repeated supplies. Ground ≠ chassis until R101.

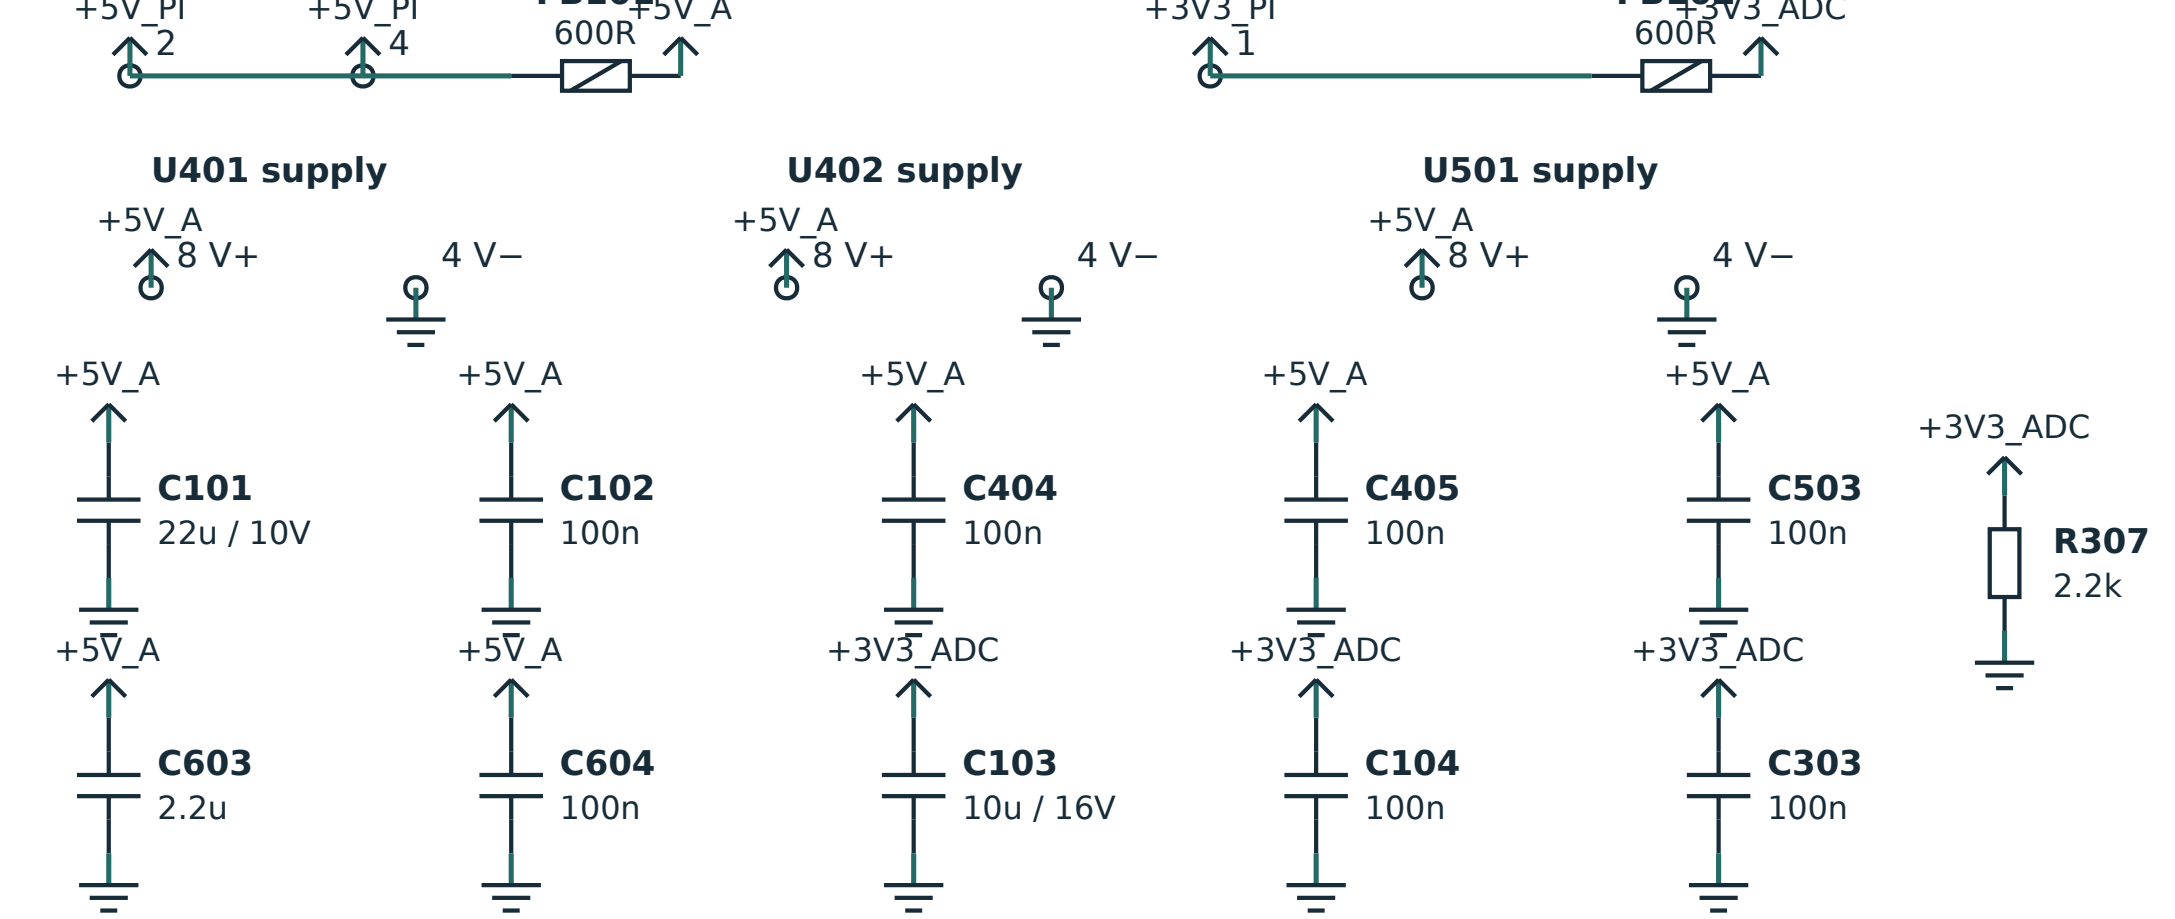

All 95 PCB components + 4 panel sockets retained. KiCad source is authoritative.