



Passive expression pedal / I2C ADC / M1

44 x 34 mm | Top SMT only | Square header pad = pin 1 | Separate independent project


FRONT / COPPER

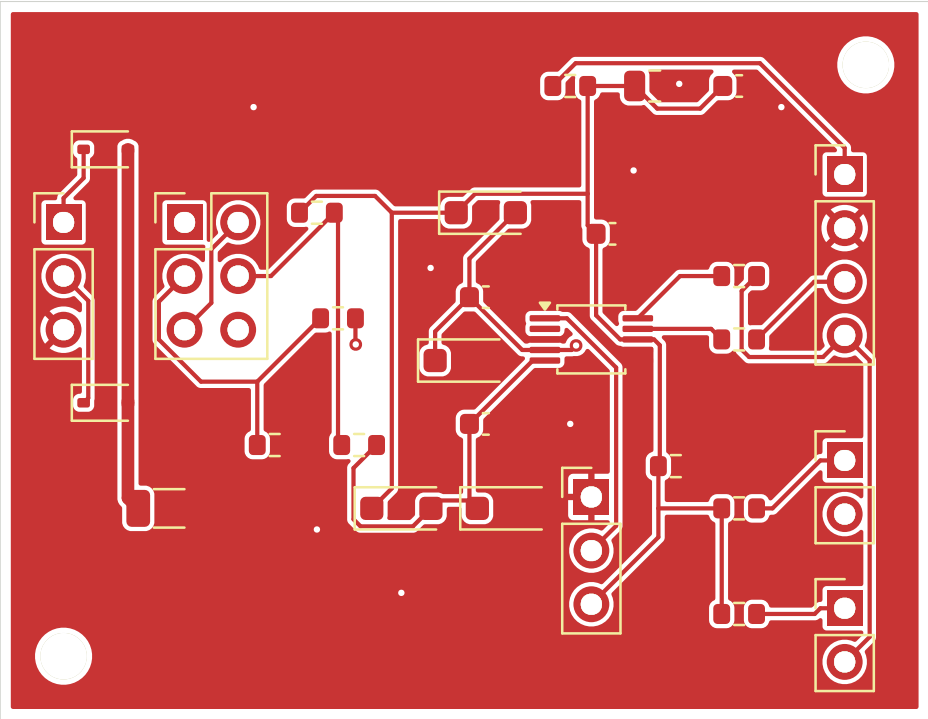

BACK / VIEWED FROM BACK

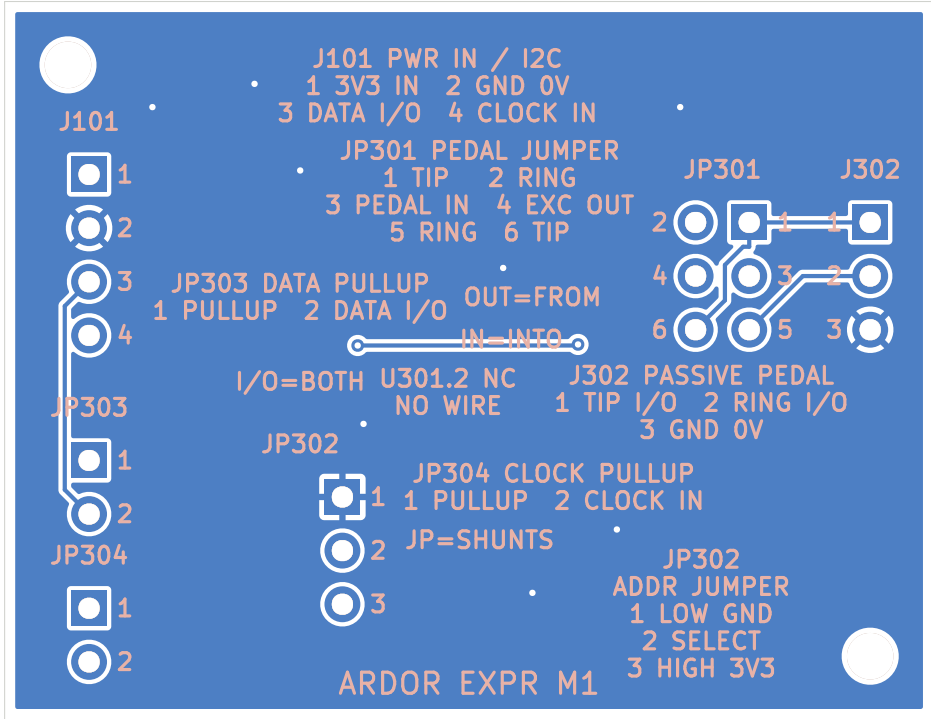

TOP / COMPONENT REFERENCES

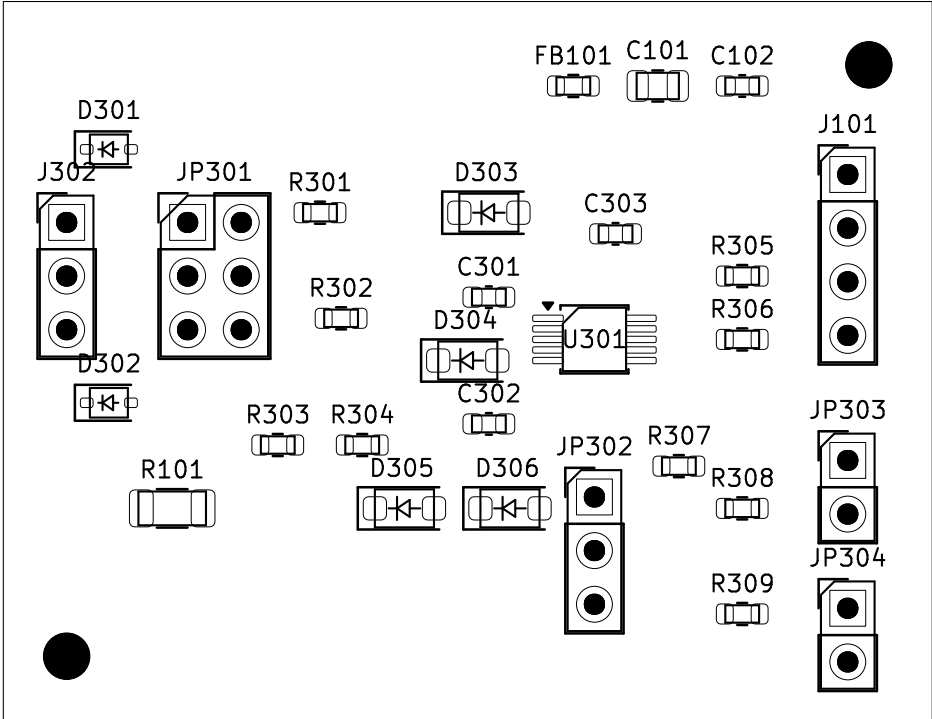

CONNECTOR PIN MAP — USE NUMBERED PADS, NOT SCREEN LEFT/RIGHT

J302 / PASSIVE PEDAL

1=TIP I/O 2=RING I/O
3=GND 0V

JP302 / ADDR JUMPER

1=LOW GND 2=SELECT
3=HIGH 3V3

J101 / PWR IN / I2C

1=3V3 IN 2=GND 0V
3=DATA I/O 4=CLOCK IN

JP303 / DATA PULLUP

1=PULLUP 2=DATA I/O

JP301 / PEDAL JUMPER

1=TIP 2=RING
3=PEDAL IN 4=EXC OUT
5=RING 6=TIP

JP304 / CLOCK PULLUP

1=PULLUP 2=CLOCK IN

SMT: 23 placements; manual fit: J101, J302, JP301, JP302, JP303, JP304

Check IC pin 1 / diode / electrolytic polarity in JLCPCB preview. See module README for jumpers, power and commissioning.