


Mono line output / relay mute / internal amp feed

REV M1 | EXTERNAL HOST + REGULATED POWER | NO OTHER MODULE REQUIRED

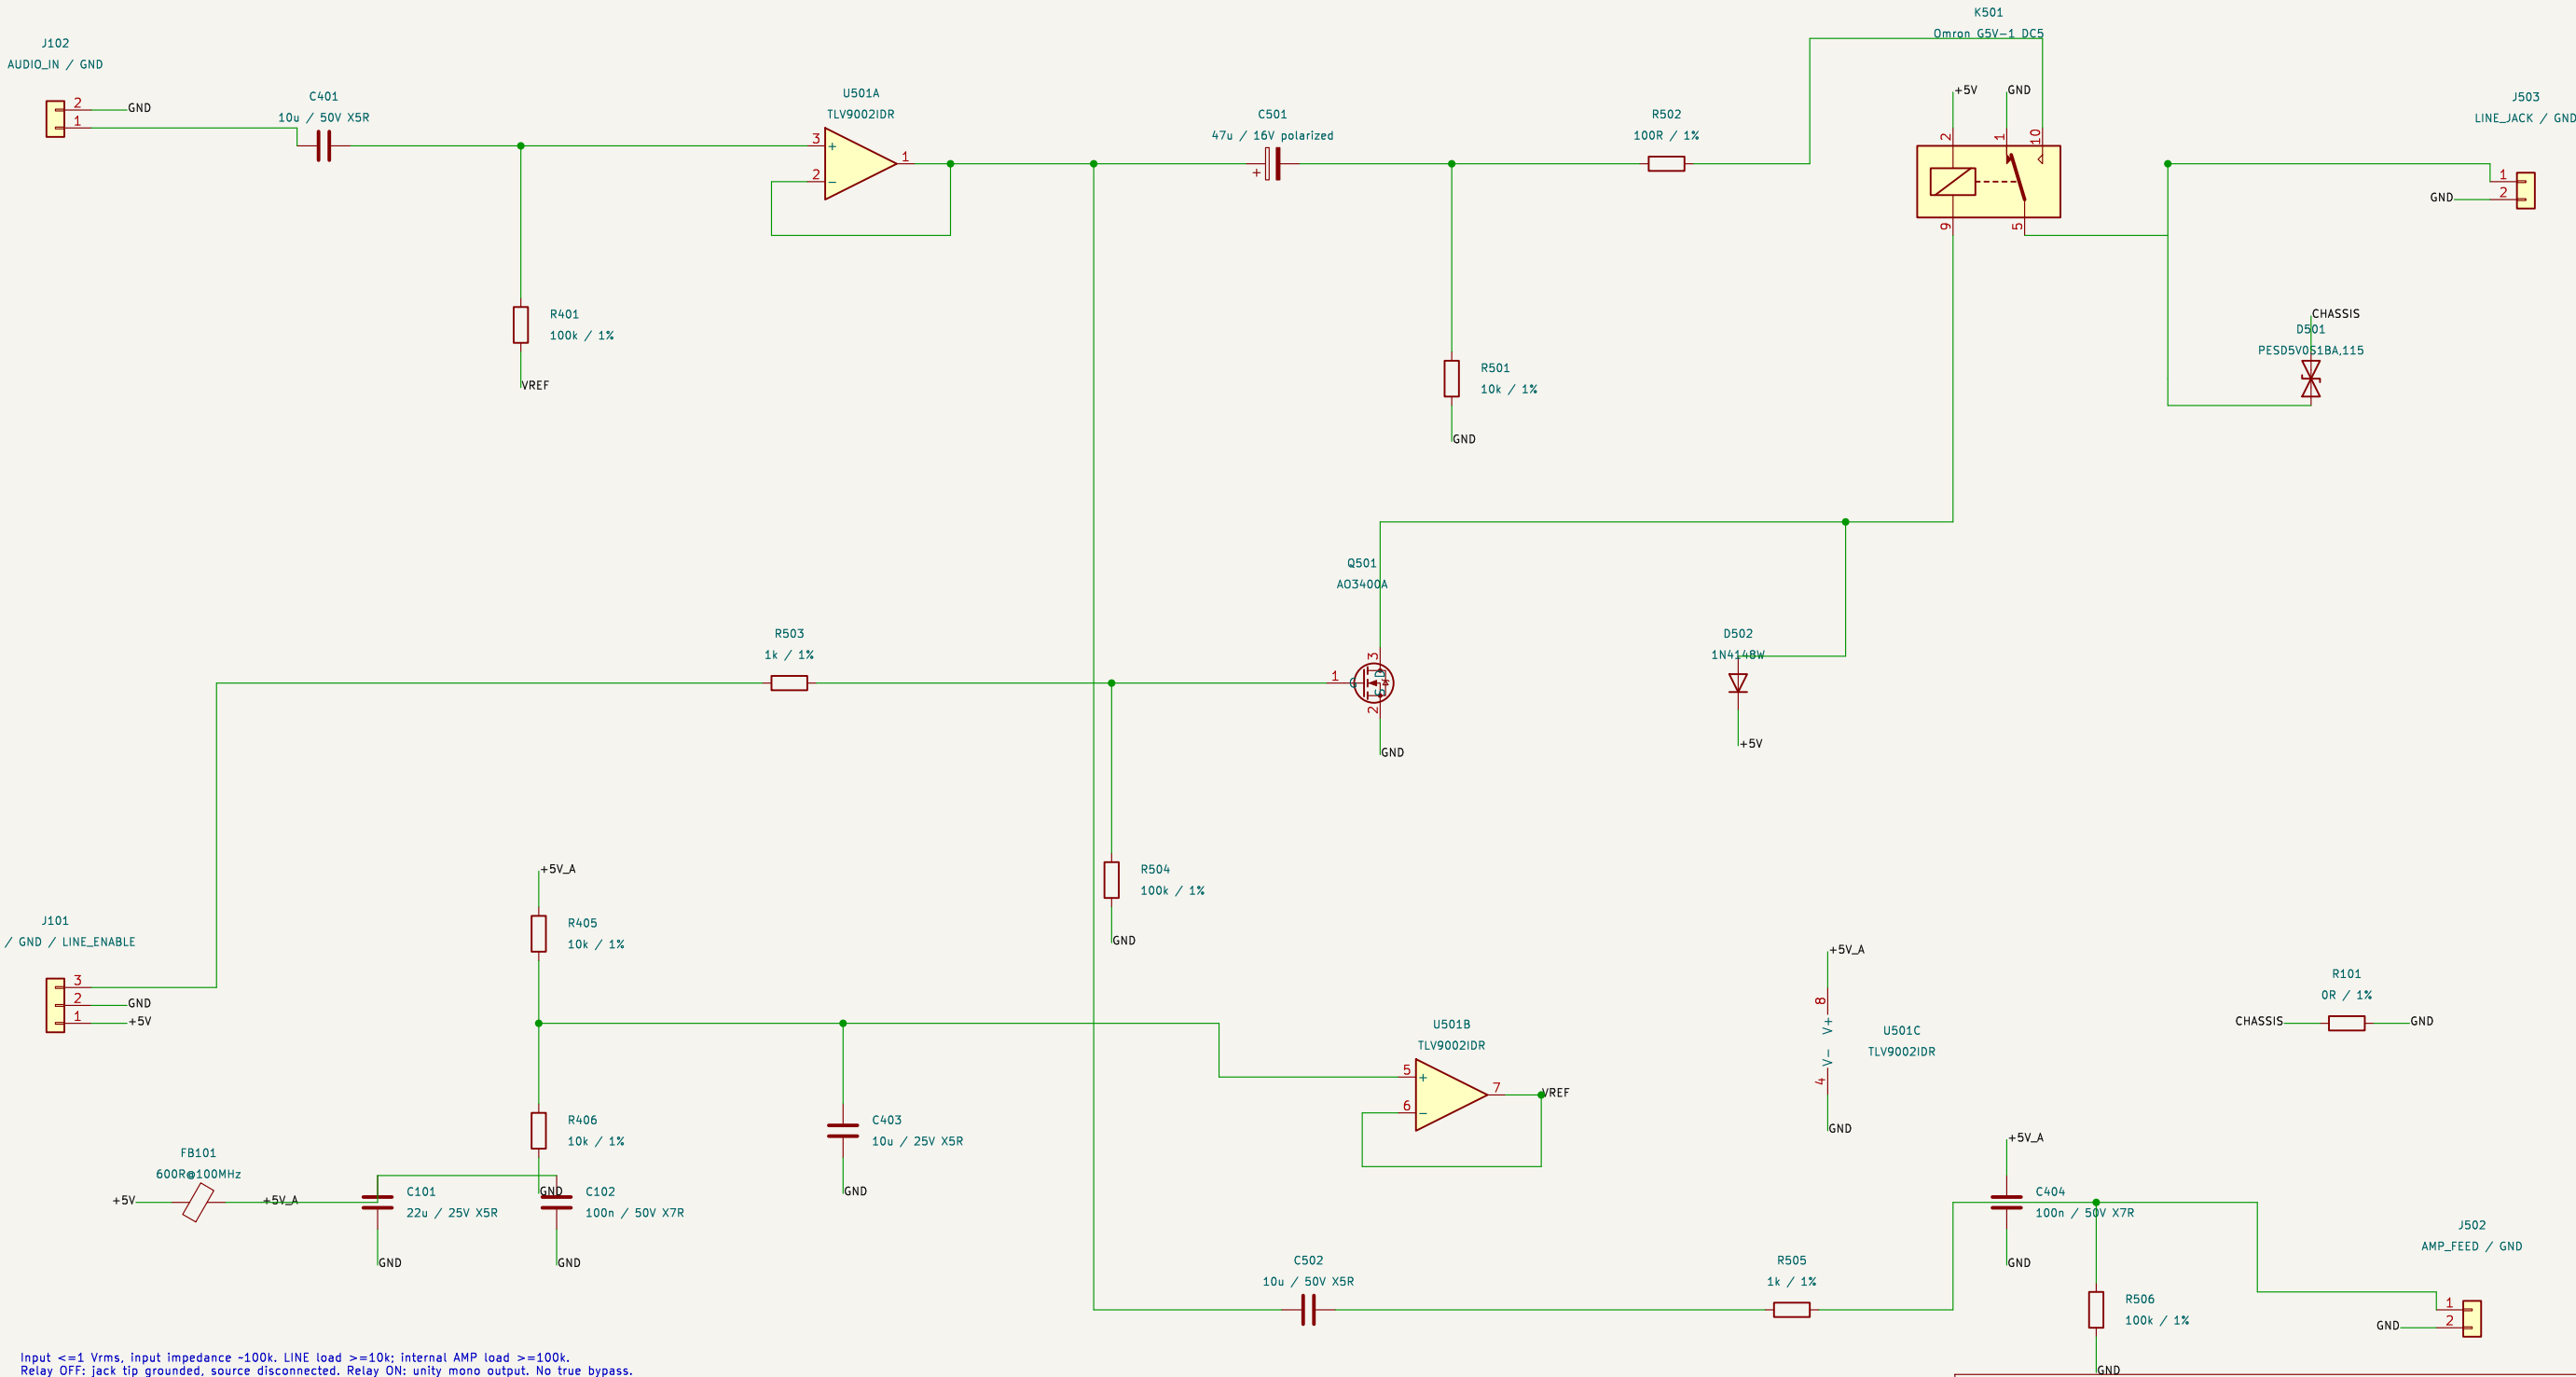

Input ≤ 1 Vrms, input impedance $\sim 100k$. LINE load $\geq 10k$; internal AMP load $\geq 100k$.
Relay OFF: jack tip grounded; source disconnected. Relay ON: unity mono output. No true bypass.
3.3 V active-high enable: leave LOW until audio is stable. 5 V supply budget ≥ 50 mA.
C501 + toward buffer. J502 is a signal feed, not a speaker driver; jack sleeves bond the enclosure.

Engineering prototype – bench validation required

Arдор

Sheet: /

File: Arдор_Line_Out.kicad_sch

Title: Mono line output / relay mute / internal amp feed

Size: A3

Date: 2026-10-02

Rev: M1

KiCad E.D.A. 9.0.2

Id: 1/1