


Isolated MIDI input / 3.3 V UART

REV M1 | EXTERNAL HOST + REGULATED POWER | NO OTHER MODULE REQUIRED

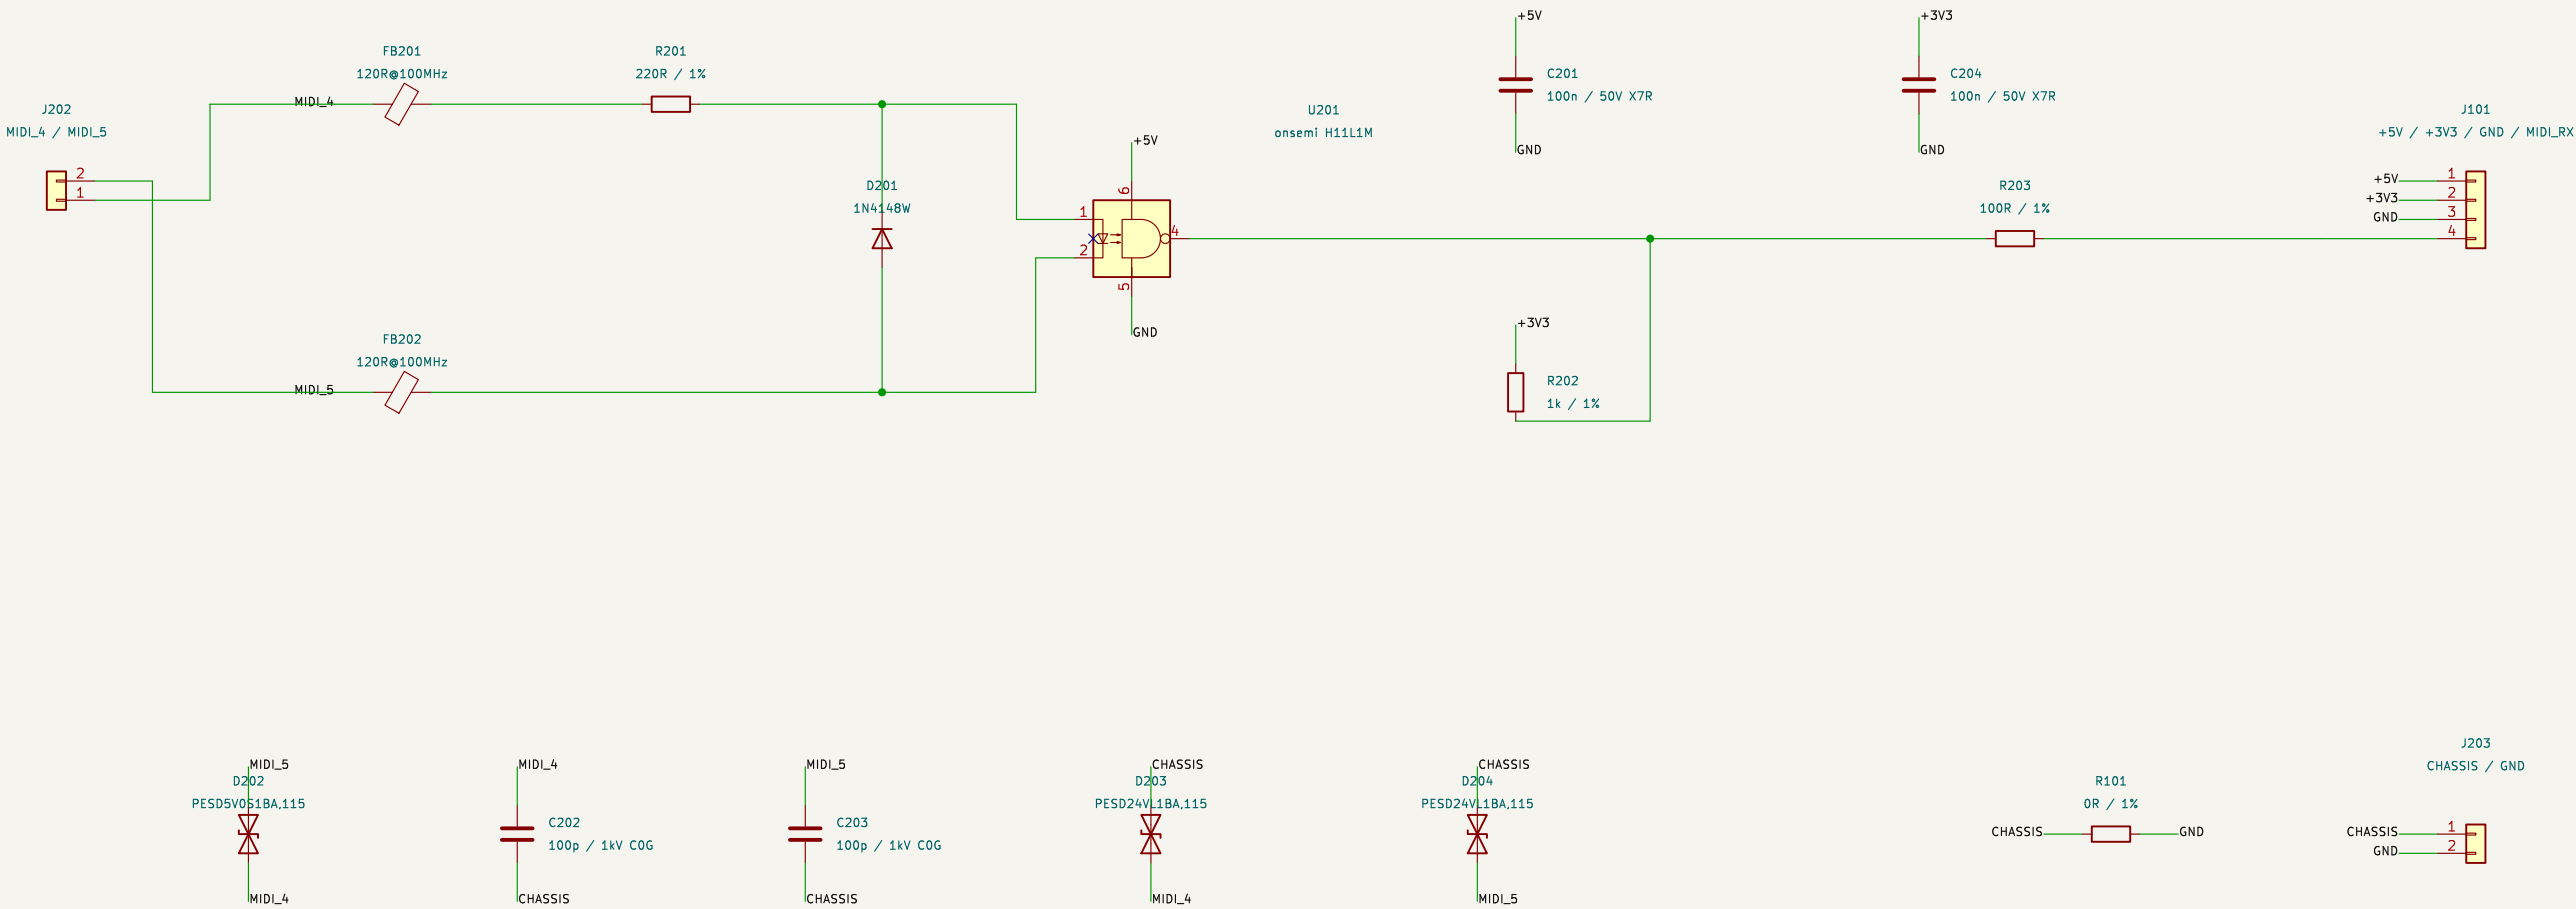

DIN panel socket: contact 4 -> J202.1; contact 5 -> J202.2. Pins 1/2/3 and shell unconnected.
Insulate DIN shell. J203.1 bonds the enclosure; R101 returns ESD to local GND.
Optocoupler LED current -> UART low. The output pull-up is 3.3 V, never 5 V.
Functional ground-loop isolation; transient clamps limit common-mode range. Not a safety isolator.

+3V3 +5V CHASSIS GND

Engineering prototype – bench validation required

Ardor

Sheet: /
File: Ardor_MIDI.kicad_sch

Title: Isolated MIDI input / 3.3 V UART

Size: A3 Date: 2026-10-02

KiCad E.D.A. 9.0.2

Rev: M1

Id: 1/1