


Stereo buffer / mono average / AC outputs

REV M1 | EXTERNAL HOST + REGULATED POWER | NO OTHER MODULE REQUIRED

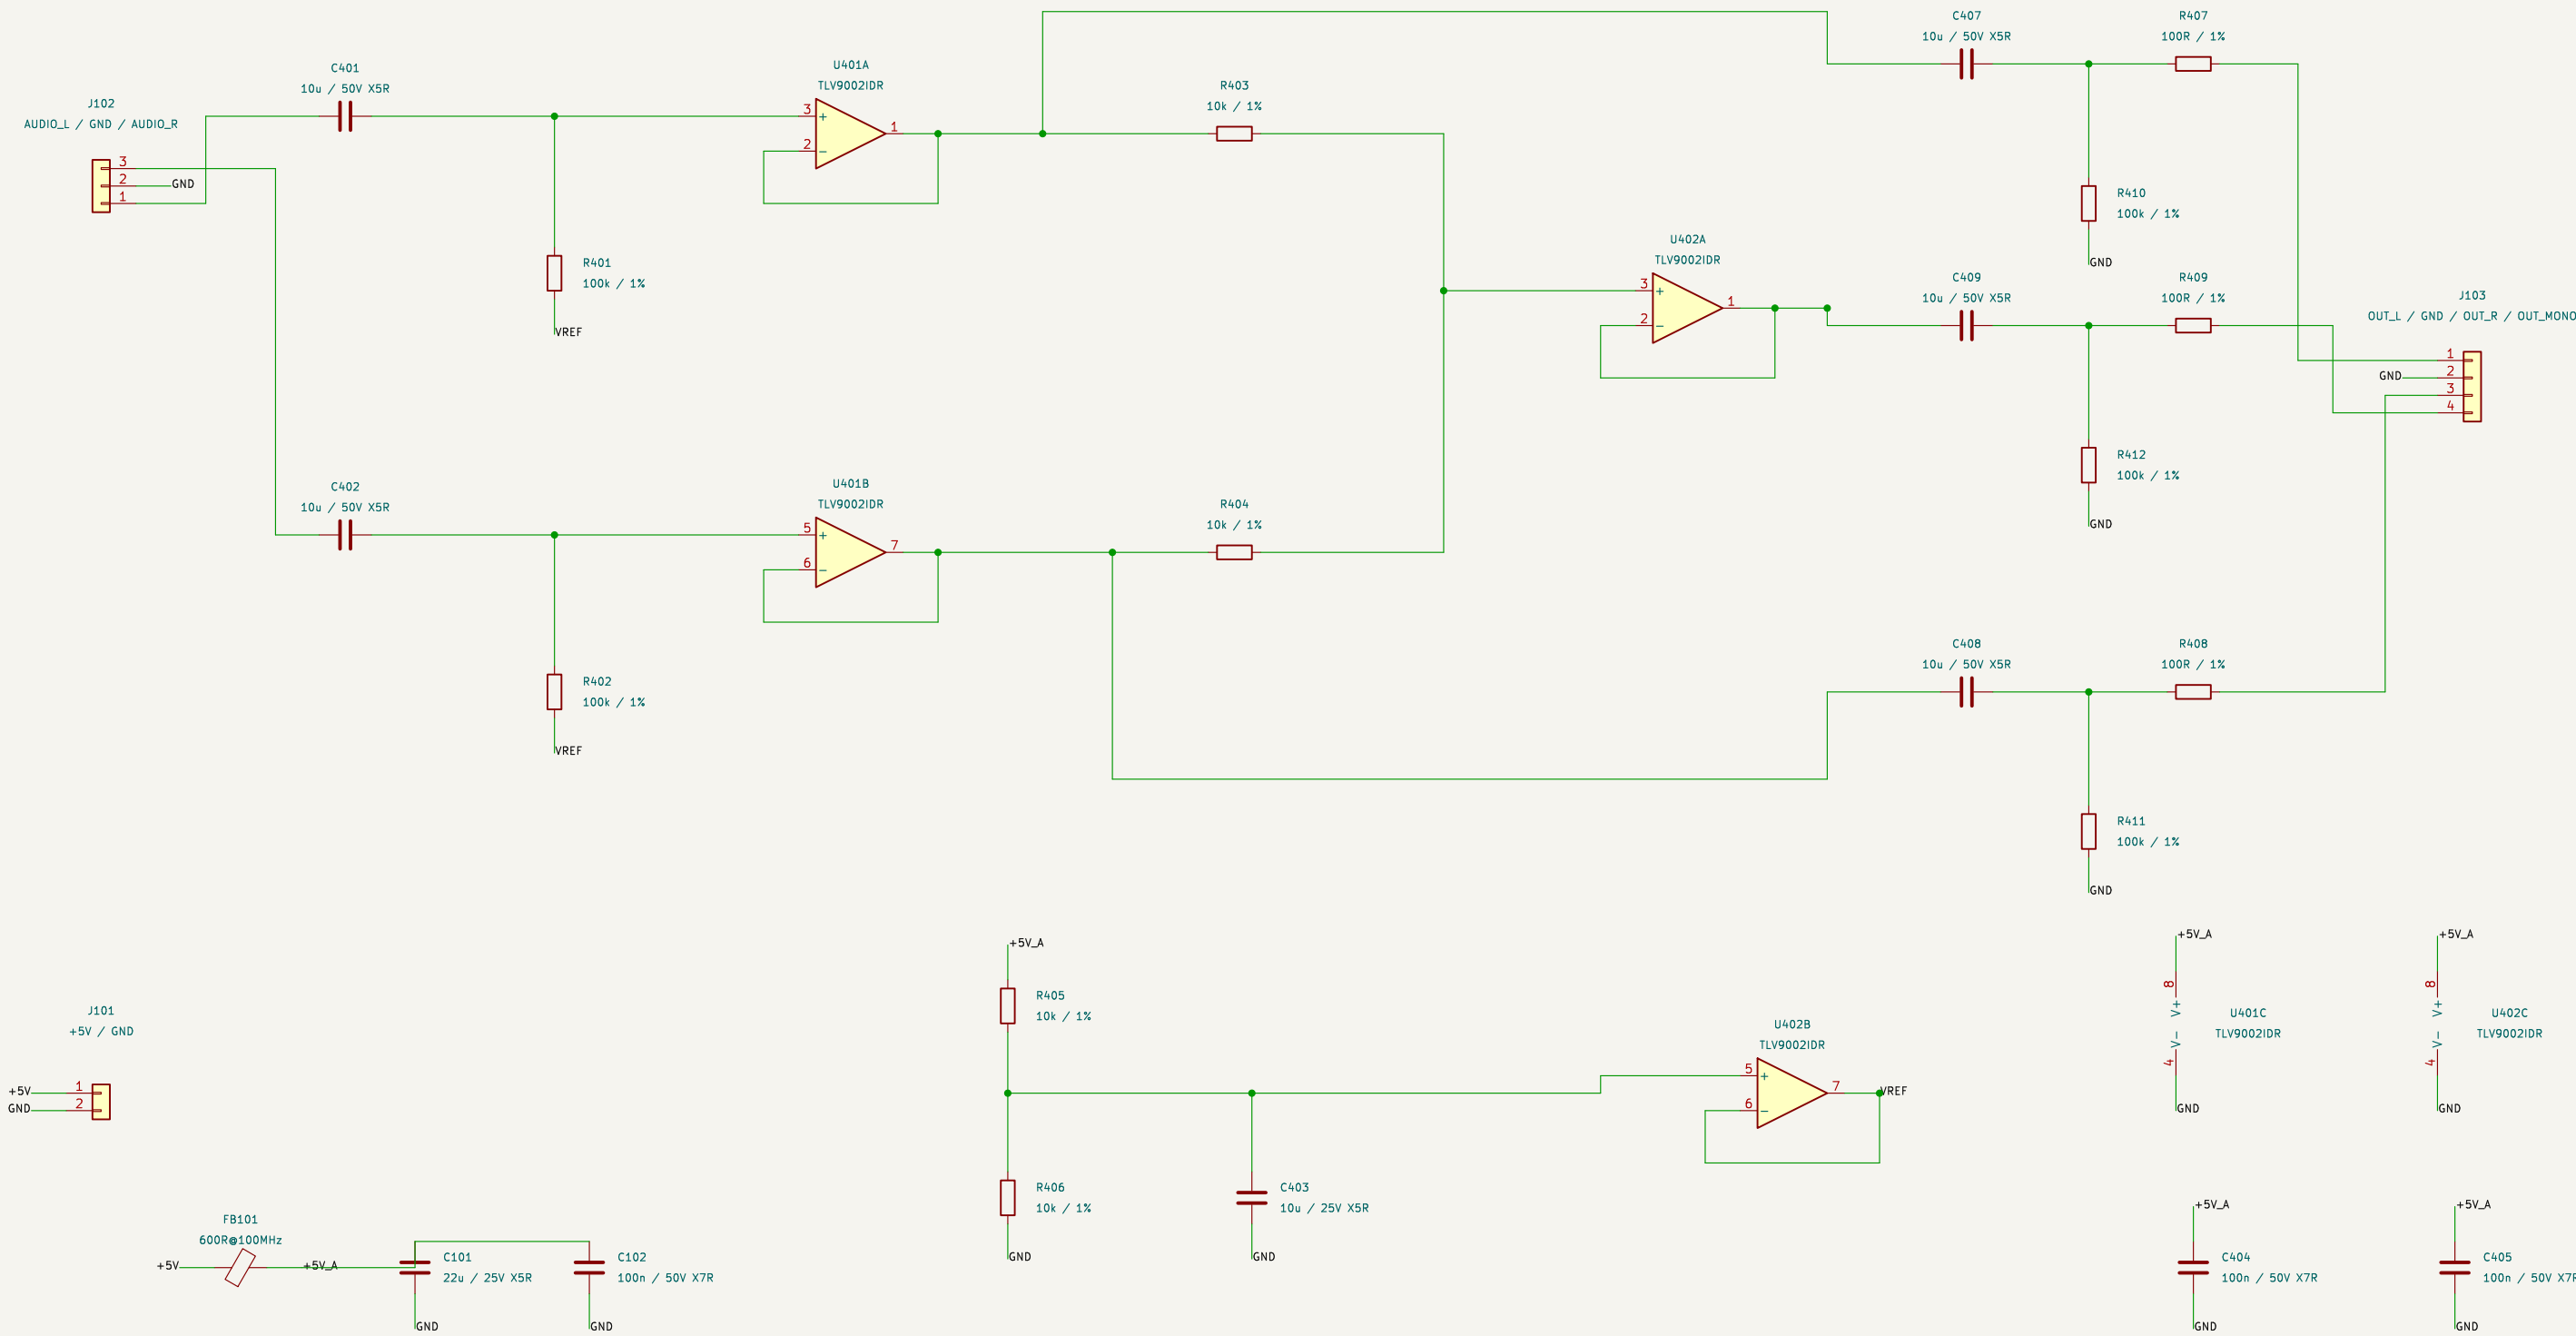

Line-level input ≤ 1 Vrms/channel. Output loads $\geq 10k$. Mono = (L + R)/2, unity buffers.
All three outputs AC coupled; no 2.5 V bias leaves this board. For mono input, feed both channels
or accept -6 dB when using one channel. Harness connectors are internal; add jack-entry ESD protection
for exposed ports. This board is neither an instrument preamp nor an ADC, headphone or power amplifier.

Engineering prototype – bench validation required

Ardor

Sheet: /

File: Ardor_Mixer.kicad_sch

Title: Stereo buffer / mono average / AC outputs

Size: A3

Date: 2026-10-02

Rev: M1

KiCad E.D.A. 9.0.2

Id: 1/1