



NMRA Technical Note	
Layout Command Control™ (LCC)	
Event Identifiers	
Apr 25, 2021	TN-9.7.0.4

Adopted as a NMRA Technical Note

The OpenLCB Standard document appended to this cover sheet has been formally adopted as a NMRA Standard by the NMRA Board of Directors on the date shown in the *Adopted* column in the *Version History* table below.

Version History

Date	Adopted	Summary of Changes
Feb 17, 2015		Initial version submitted for public comment
Feb 6, 2016	Feb 20, 2016	Minor grammatical corrections and readability improvements as well as the following specific changes: <ul style="list-style-type: none"> Moved 2.5.1.1 MERG CBUS section down to section 2.5.3.2 MERG CBUS Significantly expanded the explanations for all the subsections of 2.5 Allocation section
Apr 25, 2021		Changed LCC logo to include the ® symbol Changed “Layout Command Control” to have the ™ symbol Added the NMRA Legal Disclaimer fine-print Changed the OpenLCB license to “Creative Commons Attribution-ShareAlike 4.0 International”

Important Notices and Disclaimers Concerning NMRA Standards Documents

The Standards (S), Recommended Practices (RP), Technical Note (TN) and Technical Information (TI) documents of the National Model Railroad Association ("NMRA Standards documents") are made available for use subject to important notices and legal disclaimers. These notices and disclaimers, or a reference to this page, appear in all standards and may be found under the heading "Important Notices and Disclaimers Concerning NMRA Standards Documents."

Notice and Disclaimer of Liability Concerning the Use of NMRA Standards Documents

NMRA Standards documents are developed within the Standards and Conformance Department of the NMRA in association with certain Working Groups, members, and representatives of manufacturers and sellers. NMRA develops its standards through a consensus development process, which brings together volunteers representing varied viewpoints and interests to achieve the final product. NMRA Standards documents are developed by volunteers with modeling, railroading, engineering, and industry-based expertise. Volunteers are not necessarily members of NMRA, and participate without compensation from NMRA.

NMRA does not warrant or represent the accuracy or completeness of the material contained in NMRA Standards documents, and expressly disclaims all warranties (express, implied and statutory) not included in this or any other document relating to the standard or recommended practice, including, but not limited to, the warranties of: merchantability; fitness for a particular purpose; non-infringement; and quality, accuracy, effectiveness, currency, or completeness of material. In addition, NMRA disclaims any and all conditions relating to results and workmanlike effort. In addition, NMRA does not warrant or represent that the use of the material contained in NMRA Standards documents is free from patent infringement. NMRA Standards documents are supplied "AS IS" and "WITH ALL FAULTS."

Use of NMRA Standards documents is wholly voluntary. The existence of an NMRA Standard or Recommended Practice does not imply that there are no other ways to produce, test, measure, purchase, market, or provide other goods and services related to the scope of the NMRA Standards documents. Furthermore, the viewpoint expressed at the time that NMRA approves or issues a Standard or Recommended Practice is subject to change brought about through developments in the state of the art and comments received from users of NMRA Standards documents.

In publishing and making its standards available, NMRA is not suggesting or rendering professional or other services for, or on behalf of, any person or entity, nor is NMRA undertaking to perform any duty owed by any other person or entity to another. Any person utilizing any NMRA Standards document, should rely upon their own independent judgment in the exercise of reasonable care in any given circumstances or, as appropriate, seek the advice of a competent professional in determining the appropriateness of a given NMRA Standards documents.

IN NO EVENT SHALL NMRA BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO: THE NEED TO PROCURE SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE PUBLICATION, USE OF, OR RELIANCE UPON ANY STANDARD OR RECOMMENDED PRACTICE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE AND REGARDLESS OF WHETHER SUCH DAMAGE WAS FORESEEABLE.

Translations

NMRA's development of NMRA Standards documents involves the review of documents in English only. In the event that an NMRA Standards document is translated, only the English version published by NMRA is the approved NMRA Standards document.

Official Statements

A statement, written or oral, that is not processed in accordance with NMRA policies for distribution of NMRA communications, or approved by the Board of Directors, an officer or committee chairperson, shall not be considered or inferred to be the official position of NMRA or any of its committees and shall not be considered to be, nor be relied upon as, a formal position of NMRA.

Comments on Standards

Comments for revision of NMRA Standards documents are welcome from any interested party, regardless of membership. However, **NMRA does not provide interpretations, consulting information, or advice pertaining to NMRA Standards documents.**

Suggestions for changes in documents should be in the form of a proposed change of text, together with appropriate supporting comments. Since NMRA standards represent a consensus of concerned interests, it is important that any responses to comments and questions also receive the concurrence of a balance of interests. For this reason, NMRA, its departments, Working Groups or committees cannot provide an instant response to comments, or questions except in those cases where the matter has previously been addressed. For the same reason, NMRA does not respond to interpretation requests. Any person who would like to participate in evaluating comments or in revisions to NMRA Standards documents may request participation in the relevant NMRA working group.

Laws & Regulations


Users of NMRA Standards documents should consult all applicable laws and regulations. Compliance with the provisions of any NMRA Standards document does not constitute compliance to any applicable regulatory requirements. Implementers of the standard are responsible for observing or referring to the applicable regulatory requirements. NMRA does not, by the publication of NMRA Standards documents, intend to urge action that is not in compliance with applicable laws, and NMRA Standards documents may not be construed as doing so.

Copyrights

NMRA Standards documents are copyrighted by NMRA under US and international copyright laws. They are made available by NMRA and are adopted for a wide variety of both public and private uses. These include both use, by reference, in laws and regulations, and use in private self-regulation, standardization, and the promotion of modeling, structural and engineering practices and methods. By making NMRA Standards documents available for use and adoption by public authorities and private users, NMRA does not waive any rights in copyright to the NMRA Standards documents.

IMPORTANT NOTICE

NMRA Standards documents do not guarantee or ensure safety, security, health, or environmental protection, or ensure against interference with or from other systems, devices or networks. NMRA Standards documents development activities consider research and information presented to the standards development group in developing any safety recommendations. Other information about safety practices, changes in technology or technology implementation, or impact by peripheral systems also may be pertinent to safety considerations during implementation of the standard. Implementers and users of NMRA Standards documents are responsible for determining and complying with all appropriate safety, security, environmental, health, and interference protection practices and all applicable laws and regulations.

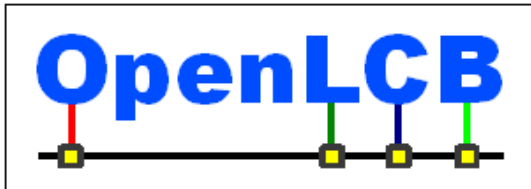

OpenLCB Technical Note

Event Identifiers

Apr 25, 2021

Adopted

1 Introduction

This technical note contains informative discussion and background for the corresponding “OpenLCB Event Identifiers Standard”. This explanation is not normative in any way.

2 Annotations to the Standard

- 5 This section provides background information on corresponding sections of the Standard document. It's expected that two documents will be read together.

2.1 Introduction

- 10 Although event identifiers generally take the format of a Unique Node Identifier plus a 16-bit extension, there are some exceptions to this noted in the Event Identifiers Standard which will be detailed in this document.

2.2 Intended Use

- 15 An Event Identifier is intended to be globally unique and for a specific purpose defined either by user configuration or enforced by the Event Identifiers Standard. Any node may be configured to produce or consume any event, regardless of its assigned Node ID. However, logically, a unique Event Identifier is defined to have a unique purpose, whether assigned by user configuration or explicitly defined in the Event Identifier Standard.

- 20 The "globally unique" requirement only refers to the universe of connected nodes; nodes that never need to communicate with each other don't need to have separate Event Identifiers. In general, however, nodes can move: they can be sold or loaned for use on another layout, nodes on modular layouts can be connected to other arbitrary modules, and few assumptions can be made. Therefore, we require global uniqueness for all Event Identifiers.

To ensure uniqueness, the top six bytes of an Event Identifier that the manufacturer or user defines are required to be within a Node ID space that the manufacturer or user controls. The low two bytes can be any number, so long as each value is used for only one event.

- 25 This requirement applies equally to events defined by a hardware node, like a push button, a software node in a computer, or Event Identifiers that are defined by a human writing them on a piece of paper. In each case, the thing doing the definition must ensure it has control over the Node ID corresponding to the top six bytes, so it can ensure that the Event Identifier not be reused.

Byte 1	Byte 2	Byte 3	Byte 4	Byte 5	Byte 6	Byte 7	Byte 8
Node ID assigned to you						Unique 16 bit extension	

30

The Node ID part can be from real nodes which a user owns.

A software configuration tool might define events and assign Event Identifiers to them. A board manufacturer may prefer a pushbutton configuration process. A modular club may decide that certain events form the “boundaries” of modules, and need to be assigned Well-Known Event Identifiers to make it easier to create large modular layouts. Whatever the method, the Event Identifiers need to be globally unique, which is ensured by requiring Event Identifiers to be created using Node ID numbers assigned to them (and therefore not assigned to anybody else), plus an additional 16 bits that they are responsible for using only once. This is worth repeating, each Event Identifier can only be used once for a specific state or meaning. It doesn't mean that multiple nodes cannot use it, but rather it should not be used for a different purpose or meaning. This is because the meaning and its use is shared across all of the nodes using it, and unless it can be guaranteed that they all have been changed there will be conflict between them. It is much safer to use a new Event Identifier, and nodes will usually have a mechanism to supply new, “virgin” Event Identifiers.

Note that the Node ID part of an Event Identifier does not have to correspond to any physical node. So long as it is assigned out of a Node ID address space that the assigning body owns, and, by extension, has control of over, it can be used. For example, a fast-clock manufacturer might want to define a range of Event Identifiers so that a different event is emitted every fast minute. For the sake of argument, let's say 24 bits worth of specific events are needed (it's actually smaller, but let's use this as an example). The manufacturer has a large range of Node IDs assigned already, so can use 8-bits worth of that space, plus the extra 16 bits in the Event Identifiers below the Node ID portion, to do this. If a manufacturer had a range of Node IDs that included at least 12.34.56.78.9A.00 through 12.34.56.78.9A.FF (in other words, all possible values of the low byte), they could create a set of Event Identifiers with the low 24 bits used to carry a time value:

Table 2: Example of defining a Set of Events

Byte 1	Byte 2	Byte 3	Byte 4	Byte 5	Byte 6	Byte 7	Byte 8
Assigned Node ID						Unique 16 bit extension	
0x12	0x34	0x56	0x78	0x9A	Time Value		

55

This is guaranteed to be unique, no matter where one of these devices is used, because the node ID range is guaranteed to belong to the manufacturer, and they will use it only once for this purpose.

2.3 References and Context

This Standard is in the context of the following OpenLCB Standards:

- The Message Network Standard, which defines the basic messages and how they interact. Higher-level protocols are based on this message network, but are defined elsewhere.
- The Event Transport Standard, which defines the protocol for transporting events.

- The Unique Identifiers Standard which defines the format and allocation of unique 48-bit identifiers.

65 **2.4 Format**

Event Identifiers are intended to be globally unique 64-bit values.

2.5 Allocation

2.5.1 Node ID Based

70 The majority of Event Identifiers fall into this category. The six most significant bytes are derived from a globally unique six byte Node ID followed by the two least significant bytes which are typically chosen through user configuration.

2.5.1.1

2.5.2 Well-Known Automatically-Routed

75 Unlike Node ID Based Event Identifiers, the Well-Known Automatically Routed Event Identifiers are explicitly defined by the Event Identifiers Standard for a specific purpose. Additionally, gateways are required to route these events to all segments.

Note a change that it is not specified whether or not the Well-Known Automatically Routed events participate in producer/consumer identify. The primary purpose of the producer/consumer identify is to pair consumers with produces, especially for the purpose of routing between OpenLCB segments.
80 Since these Well-Known Automatically-Routed events must always be routed, it could be argued that the identify events for these Well-Known Event Identifiers are redundant, but are retained for symmetry.

Though not explicitly required, it would be prudent for a manufacture to identify in a product's documentation as to which Well-Known Automatically Routed events it produces and consumes, and
85 what are the resulting actions it takes when these events occur.

2.5.2.1 Emergency Off

The Emergency Off Event Identifier (01.00.00.00.00.00.FF.FF) is a request for a node to de-energize all of its outputs. A node receiving this event may continue to remain a powered participant of the
90 OpenLCB bus, but may de-energize any outputs unrelated to maintaining OpenLCB communications. The meaning of de-energize is not prescribed for any given node, it is up to the node manufacturer and/or user to prescribe what, if anything, should happen in the node if it receives this event. For example:

- If the node is a DCC Power Station, it might disable its amplified DCC output.
- 95 • If the node is an accessory controlling turnout motors, it might remove power from the motors

A node may revert to its previous energized state following the reception of a Clear Emergency Off event (01.00.00.00.00.00.FF.FE).

100 A node that has recently joined the OpenLCB network is not expected to know about or react in any specifically prescribed way to the current Emergency Off status defined prior to the node joining the network until the next Emergency Off or Clear Emergency Off event is produced.

2.5.2.2 Emergency Stop

105 The Emergency Stop Event Identifier (01.00.00.00.00.00.FF.FD) is a request for a node to command all of its outputs to a safe state. A node receiving this event is not required to de-energize any of its outputs. The meaning of “safe state” is not prescribed for any given node, it is up to the node manufacturer and/or user to prescribe what, if anything, should happen in the node if it receives this event. For example:

- If the node is acting on behalf of one or more DCC trains, it might send the global emergency stop command onto the DCC signal bus.
- 110 • If the node is an accessory controlling turnout motors, it might do nothing, route its outputs to a manufacture default state, route its outputs to a user defined state, or something else altogether.

A node may revert to its previous non-Emergency Stop state following the reception of a Clear Emergency Stop event (01.00.00.00.00.00.FF.FC). A node that has recently joined the OpenLCB network is not expected to know about or react in any specifically prescribed way to the current Emergency Stop status defined prior to the node joining the network until the next Emergency Stop or Clear Emergency Stop event is produced.

115

2.5.2.3 Other Well-Known Automatically Routed

Other Well-Known Automatically Routed Event Identifiers not discussed here have their uses prescribed and/or discussed elsewhere. No assumptions should be made about the use of these Well-Known Automatically Routed Event Identifiers as prescribed by this document.

120

2.5.3 Well-Known

Unlike Node ID Based Event Identifiers, the Well-Known Event Identifiers are explicitly defined by the Event Identifiers Standard for a specific purpose. Gateways are not required to actively route these events to all segments, and may maintain a static or learned routing table for these events to prevent unnecessary propagation.

125

Though not explicitly required, it would be prudent for a manufacture to identify in a product's documentation as to which Well-Known events it produces and consumes and what are the resulting actions it takes when these events occur.

2.5.3.1 Duplicate Node ID

130 The Duplicate Node ID Detected event would typically be sent by a node that receives a packet from another node containing its own unique Node ID. The production of this event by a node is not explicitly required.

2.5.3.2 MERG CBUS

135 OpenLCB allocates a Node ID address space specifically for mapping MERG CBUS events into OpenLCB. CBUS events come in two types: long and short. A long event is uniquely identified by the CBUS Node ID and Event ID. A CBUS short event is translated into an OpenLCB event by using 0x0000 as the Node ID in the “CBUS Node ID” field of the OpenLCB event identifier. This is allowed because in the CBUS standard, node-id 0x0000 is not permitted.

140 CBUS events can also come in the form of a request. These requests should be translated into an Identify Producer on OpenLCB in order to solicit the response that the CBUS request is asking for. Two Identify Producer messages will have to be sent, one for the ON state range and another for an OFF state range, the response of which will need to be translated back for CBUS.

2.5.3.3 Other Well-Known

145 Other Well-Known Event Identifiers not discussed here have their uses prescribed and/or discussed elsewhere. No assumptions should be made about the use of these Well-Known Event Identifiers as prescribed by this document.

Table of Contents

1 Introduction.....	1
2 Annotations to the Standard.....	1
2.1 Introduction.....	1
2.2 Intended Use.....	1
2.3 References and Context.....	2
2.4 Format.....	3
2.5 Allocation.....	3
2.5.1 Node ID Based.....	3
2.5.2 Well-Known Automatically-Routed.....	3
2.5.2.1 Emergency Off.....	3
2.5.2.2 Emergency Stop.....	4
2.5.2.3 Other Well-Known Automatically Routed.....	4
2.5.3 Well-Known.....	4
2.5.3.1 Duplicate Node ID.....	4
2.5.3.2 MERG CBUS.....	5
2.5.3.3 Other Well-Known.....	5