

PROTORK

Your final valve solution



A 300 & M 300 series

3 piece #150 & #300 Ball valves



Specifications:

Size range : 1/4" – 4" valves (Regular bore)
1/4" – 3" Valves (Full bore)
Materials : WCB, CF8, CF8M and other Alloys on request
Temperature : -30°C to 300°C
Operation : A - Actuated, M - Manual
Specials : Diverter type, V-port, Cryogenic,
Cavity filler, Fire safe, High cycle valves
& others on request.
Application : Water, oil, Steam, Pharmaceuticals,
Chemicals & Others

End Connections:


Threaded (BSP, NPT, BSPT)
Butt weld (SCH 10, SCH 40)
Socket weld, BWO,
Extended Butt weld,
Extended Socket weld
Extended ISO tube
ANSI (#150, #300),
Flanged DIN (PN 16, PN 40)
DIN 3852,
Tri clamp, KF flanges
SAE flanges & others on request.

Design Standard:


ANSI B16.34
BS 5351
ISO 5211
BS 5159
Pressure Testing:
API 598, BS 6755
ISO 5208
Fire Testing:
API 607 6th edition

Engineered for maximum
Durability, Performance & Quality

"PROTORK" We would like to introduce ourselves as one of the finest industrial valve manufacturer in India. Our valves are engineered for heavy duty, reduced maintenance, excellent performance and manufactured in a variety of body and seal materials.

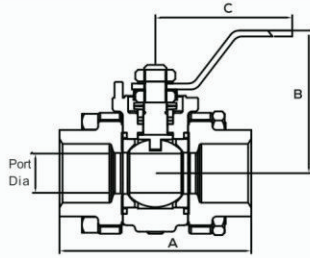

3pc Screwed End | Socket weld | Butt weld

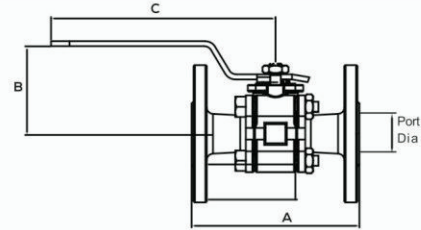


3pc Flanged End Class 150 & Class 300

Valve Dimensions of A & M 300 series Screwed end / Socket weld/ Flanged End #150, #300 :


Valve Size				Threaded end/ Welded			Port Dia	Flanged End #150			Flanged end #300		
(in inches)		(in mm)		A	B	C		A	B	C	A	B	C
1/4"	3/8"	10.8	15.1	67	60	151	11	108	59	156	140	59	156
1/2"	3/4"	15	20	69	62	151	15	117	59	156	152	59	156
3/4"	1"	20	25	85	73	170	21	127	61	172	165	61	172
1"	1 1/4"	25	32	102	74	170	26	127	65	172	168	65	172
1 1/4"	1 1/2"	32	40	106	100	205	32	165	70	222	190	70	222
1 1/2"	2"	40	50	120	103	205	38	178	70	222	216	70	222
2"	2 1/2"	50	65	136	112	205	51	190	70	222	241	70	222
2 1/2"	3"	65	80	169	185	400	64	203	185	400	284	185	400
3"	4"	80	100	195	200	600	83	229	201	610	305	201	610

• 1/4" , 3/8" & 1 1/4" (32 mm) are not available in Flanged end

Antistatic Device available in A Series

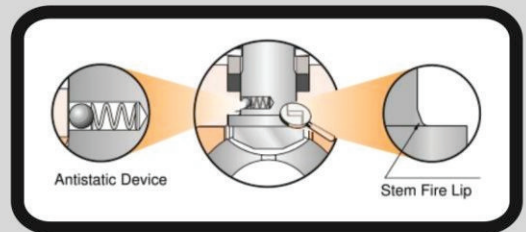


Fire safe available in A Series

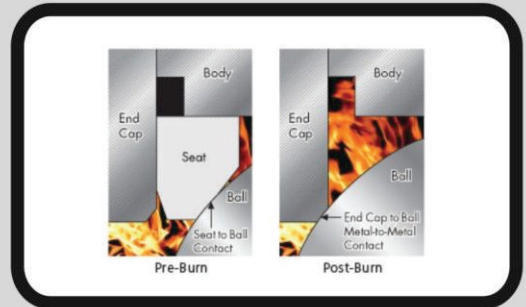

Material of Construction:

Item	Name	Materials
1A	BODY	CF8M/CF8/WCB
1B	BODY	CF8M/CF8/WCB
2A	END CAP	CF8M/CF8/WCB
2B	END CAP	CF8M/CF8/WCB
2C	END CAP diverter SE	CF8M/CF8/WCB
2D	END CAP diverter FE	CF8M/CF8/WCB
3	BALL(3 pc SE & FE)	CF8/CF8M/SS 304/SS 316
3A	BALL(D-L-PORT)	CF8/CF8M/SS 304/SS 316
3B	BALL(D-T-PORT)	CF8/CF8M/SS 304/SS 316
4	STEM	SS 304/SS 316
5	SEAT RING	PTFE
6	BODY SEAL	TFM/ GRAPHITE
7	STEM SEAL	CARBON FILLED PTFE
8	GLAND PACKING	CARBON FILLED PTFE
9	GLAND	SS 304/SS 316
10	DISK SPRING	SS 304/SS 316
11	LOCKING CLIP	SS 304/SS 316
12	GLAND NUT	STEEL PLATED/ SS 304/SS 316
13	SERRATED WASHER	STEEL PLATED/ SS 304/SS 316
14	HANDLE(D-90Y/SE/FE)	STEEL PLATED/ SS 304/SS 316
14A	HANDLE (D-180 Y)	STEEL PLATED/ SS 304/SS 316
15	BODY CONNECTOR BOLT	STEEL PLATED/ SS 304/SS 316
16	BODY CONNECTOR NUT	STEEL PLATED/ SS 304/SS 316
17	STOP PIN	STEEL PLATED/ SS 304/SS 316
18	STOPPER 180 Y	STEEL PLATED/ SS 304/SS 316



• Other materials are on request

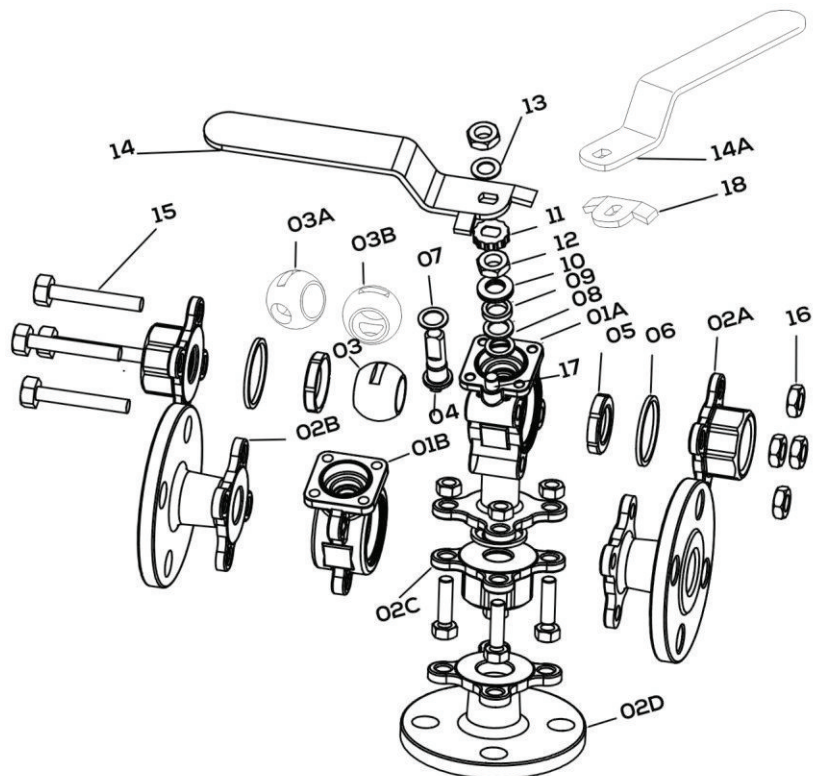

Diverter Valves :

Size : ½" – 2" (Regular bore)
Service : Diversion, Mixing, Blending

Port : 'L' Port & 'T' Port
Material : CS & SS (CF8, CF8M)

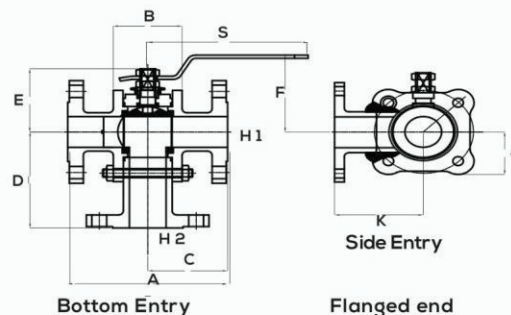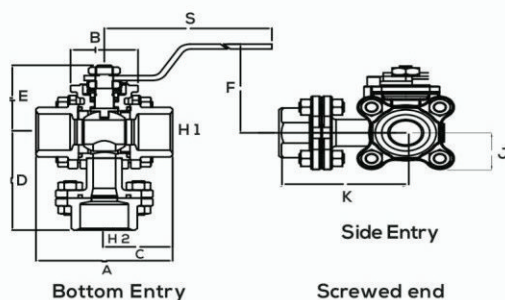

Valve Dimensions for screwed end/ sw/ bw

Valve Size	Port		Port H1	Port H2	A	B	C	D	E	F	J	K	S
	Inch	mm											
½"	15	11	9	67	13	33.5	64	35	60	14	67	151	
¾"	20	15	12	69	22.5	34.5	71	38.8	62	23.6	68	151	
1"	25	21	16	85	32	42.5	88	55.2	73	30.2	86.5	170	
1 ½"	40	32	27	106	43	53	105	71	100	38.9	100	205	
2"	50	38	35	120	54.5	60	113	77.5	103	44	107	205	

• 65, 80, 100 mm dimensions are on request

A 300 Series Special Service Valves:

Cavity Filler

Size Range : 1/2" – 4" (DN15 – DN100)
 Material : CF8, CF8M & other Alloys on request
 Service Applications : Food, Pharmaceutical, & others
 End Connections : Screwed, Butt-weld, Socket-weld, Flanged ANSI 150#, 300# or DIN PN16, PN40
 Operation : Manual or Actuated

Cavity filler Ball valves are ideal for sanitary service, by enveloping the valve & stem with a combined seat & seal thus eliminating dead space in the ball cavity

Cryogenic 3 piece Valves

Size Range : 1/4"-4" (DN8 -DN100)
 Series in range : Regular Bore, Full Bore
 Applications : Food, Pharma, Automotive, Gas, Chemicals & Others
 Service : Nitrogen, Oxygen, Air, Hydrogen, Helium, Argon and others
 Pressure Range : Vacuum up to 300 bar (4350 psi) – Higher Pressure on Request
 Temperatures : -268.9°C to 230°C (-452.1°F to 446°F)
 Materials : CF 8, CF8M & other materials on request
 End Connection : Butt weld, Extended Butt weld, Screwed, Socket weld, Flanged ends, & others on request.
 Operation : Hand or Gear operated Pneumatic, Electric, automatic operation

Locking Device

PROTORK'S locking device ball valves to prevent accidental movement of ball position. Valves feature a safety trigger that locks the handle in the on/off position. This is benefitted to secure the handle in position, preventing unwanted movement of the Ball.

Valve Dimensions for flanged end #150 & #300 :

Valve Size	Port		Port H1	Port H2	A		B	C		D	E	F	J	K	S
	Inch	mm			#150	#300		#150	#300						
½"	15	11	9	108	140	13	54	70	71	35	59	14	67	156	
¾"	20	15	12	117	152	22.5	58.5	76	78	38.8	59	23.6	68	156	
1"	25	21	16	127	165	32	63.5	82.5	84	55.2	61	30.2	86.5	172	
1 ½"	40	32	27	165	190	43	82.5	95	102	71	70	38.9	100	222	
2"	50	38	35	178	216	54.5	89	108	128	77.5	70	44	107	222	

• 65, 80, 100 mm dimensions are on request

Vacuum Service

PROTORK's Vacuum Service ball valves offer reliable and economical solutions for applications that require Vacuum Service valve operation. Standard PROTORK ball valves can easily be converted for effective use in Vacuum Service applications down to 20 microns, and with specific preparation, can also perform in higher Vacuum Service applications, down to 10⁻⁶ mm of mercury (torr).

Steam & Thermal Fluid

Size Range : 1/2"-4" (DN15 -DN 100)
 Service : Steam & Thermal Fluid,
 Materials : Cf8, CF8M, WCB, Hastelloy, Monel, Alloy 20, Duplex & others on request
 End Connection : Screwed, Socket-weld, Butt-weld, Flanged ANSI #150, # 300, DIN PN16, DIN PN40
 Temperatures : Steam up to 240°, Thermal Fluid up to 320°
 Operation : Manual or Actuated

Antistatic Devices & Fire safe valves

Antistatic devices are built in the valve stem to ensure electrical continuity between ball, stem & body, thus providing greater safety while handling volatile media.

Fire safe valves are designed & tested to the requirements of the market. It's special best design prevents leakage in the event of fire.


Fugitive Emission

Oil & gas processing facilities have been challenged with increasingly stringent regulatory & legislative requirements impacting environmental health & safety. This is particularly allowable fugitive emissions from process valves.

Comparisons of PROTORK'S A & M Series:

Features	A Series	M Series
1 Manual Operates	Optional	Only Manual
2 ISO PAD	Available	Not available
3 Bolting	Enclosed	Not enclosed
4 Actuator mounting	Possible	Not recommended
5 Pressure Rating	Confirms to ANSI # 150 # 300	Confirms to ANSI # 150 # 300
6 Special services (Ref page no 3)	Available	Not available
7 Spares	Interchangeable	Interchangeable

Pressure & Temperature Graph of seat variants and its application

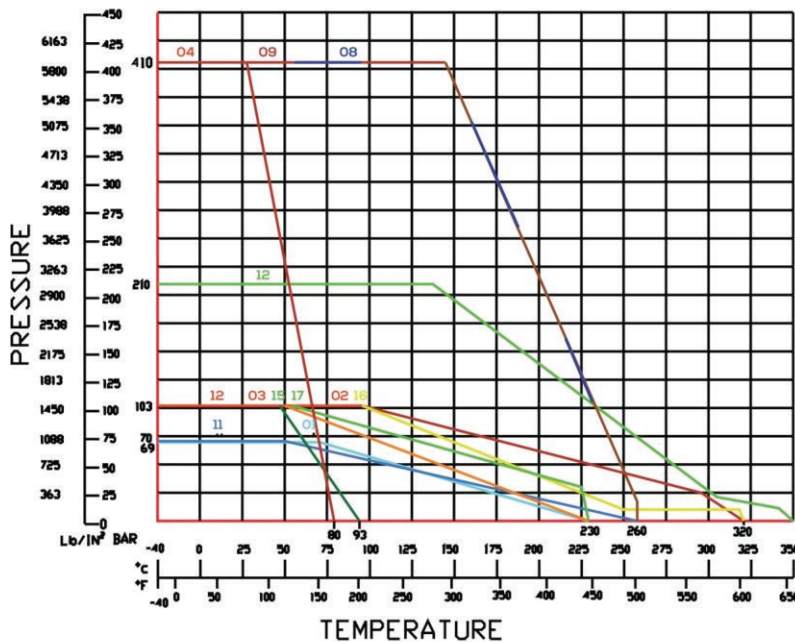

CODE

01

02

03

04

08

09

10

11

12

15

16

17

SEAT

PTFE

Carbon filled PTFE

15% Glass filled PTFE

DELTRIN

PEEK Virgin

PEEK

UHMWP

PCTFE

VESPEL

25% Glass filled PTFE

33% Carbon filled PTFE

TFM

PROTORK ORDER CODING SYSTEM

Identification Code

EX: 2"CS Screwed End SS 316 Ball PTFE Seat Manual Ball Valve Regular Bore

Order code : M 300RB- 50- 16- 03- 01-01- 00

SERIES	SIZE	Body Material	Ball & Stem	End Connection	Seat Material	Special Features	Operation Type
M 300 (RB)	08	01 SS 317 / CG8	01 SS 317 / CG8	01 BSP FEMALE	01 PTFE	01 'L' PORT 3 WAY	00 MANUAL (LEVER OPERATE)
M 300 (FB)	10	02 SS 304 / CF8	02 SS 304 / CF8	02 BSP MALE	02 Carbon filled PTFE	02 'T' PORT 3 WAY	
A 300 (RB)	15	03 SS 316 / CF8M	03 SS 316 / CF8M	03 BSPT FEMALE	03 15% GLASS FILLED PTFE	03 JACKETED HALF	01 PNEUMATIC DA
A 300 (FB)	20	04 SS 316L / CF3M	04 SS 316L / CF3M	04 BSPT MALE	04 DELTRIN	04 JACKETED FULL	02 PNEUMATIC SR
	25	05 SS 304L / CF3	05 SS 304L / CF3	05 NPT FEMALE	05 REINFORCED NYLON	05 Double Block & Bleed	03 GEAR OPERATED
	32	06 ALLOY 20	06 ALLOY 20	06 NPT MALE	06 HARD GRAPHITE	06 LOCKABLE	04 PNEUMATIC DA GEAR OPERATED
	40	07 DUPLEX SS	21 SS 410	07 ANSI 150#	07 METAL SEAT	07 CAVITY FILLER	05 PNEUMATIC SR WITH GEAR OPERATED
	50	08 HASTELLOY 'B'	22 SS 403	08 ANSI 300#	08 PEEK VIRGIN	08 FUGITIVE EMISSION	06 'T' TYPE HANDLE
	65	09 HASTELLOY 'C'	23 SS 329	09 ANSI 600#	09 PEEK	09 FIRE SAFE	07 SPRING RETURN HANDLE
	80	10 MONEL	08 HASTELLOY 'B'	10 DIN 3852	10 UHMW Polythelene	10 ANTISTATIC	08 ELECTRICAL ACTUATOR DA
	100	11 LC B	09 HASTELLOY 'C'	11 BW SCH 10	11 PTFE-PFA Copolymer	11 UNIDIRECTION	09 ELECTRICAL ACTUATOR SR
	125	12 LC 1	10 MONEL	12 BW SCH 40	12 VESPEL	12 HIGH CYCLE	
	150	13 LC 2	11 LCB	13 BW SCH 80	13 MOLY/GLASS/TFE	13 VACUUM SERVICE	
	200	14 LC C	12 LC 1	14 EXTENDED B/W	14 PVDF	14 AMONIA SERVICE	
	250	15 LC 3	13 LC 2	15 SOCKET WELD	15 25% Glass filled PTFE	15 CRYOGENIC	
	300	16 WCB	14 LCC	16 EXTENDED S/W	16 33% carbon filled PTFE	16 HIGH PRESSURE	
	350	17 A105	15 LC 3	17 TRI CLAMP	17 TFM (white)	17 CONTROL VALVE	
	400	18 WCC	16 WCB	18 EXTENDED OD TUBE	18 Graphite filled PTFE	18 V PORT	
	450	19 WC 1 Fl	17 A105	19 EXTENDED DIV TUBE			
	500	20 LF 2	24 CR MOSTED	20 EXTENDED ISO TUBE			
	550	21 SS 410	20 LF 2	21 Sanitary Clamp 150#			
	600	22 SS 403	25 AISI 4137	22 Sanitary Clamp DIN			
		23 SS 329	26 AISI 4135	23 BUTT WELD DIN			
				24 BUT WELD ISO			
				25 FLANGED DIN PN 16			
				26 FLANGED DIN PN 40			
				27 S/W OD BASED			
				28 KF FLANGES			
				29 SAE Flanges			



Canares Automation Pvt. Ltd.

Plot No.85/0-A, Industrial Suburb,
Yeshwanthpur, Bengaluru - 560 022.



080 2357 8010 / 2357 8012

2357 8014 / 2357 8016

Toll Free : 1800 4258014



sales@canares.com

www.quickair.in



www.canares.com