

- 3"x1.5" rounded

lpe slats

truck wheel bearing

welded onto s.s. shaft

∕—s.s. screws

· 4" ss shaft

—1/2" ss plate



free turning seat


s.s. fascia

surround

s.s. bolts 6"

min. embeded

/ Scale : 1/2"= 1'

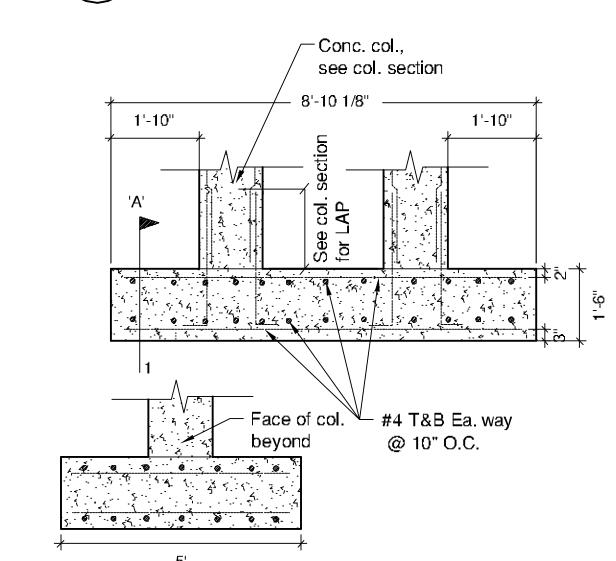



Typical Steel Mesh Weld


Scale : 1"= 1"


Footing section (A)






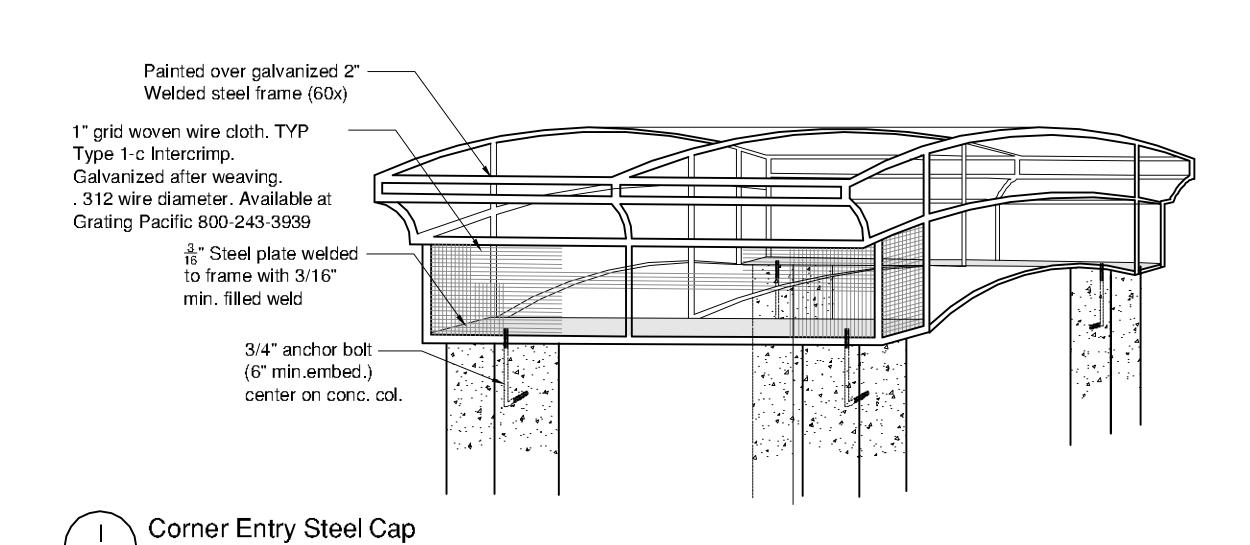


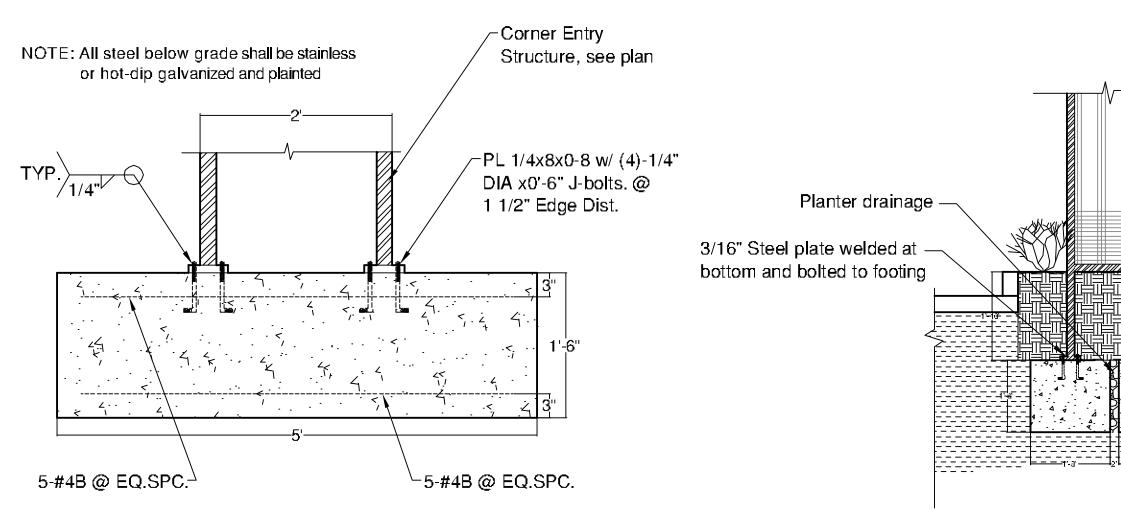




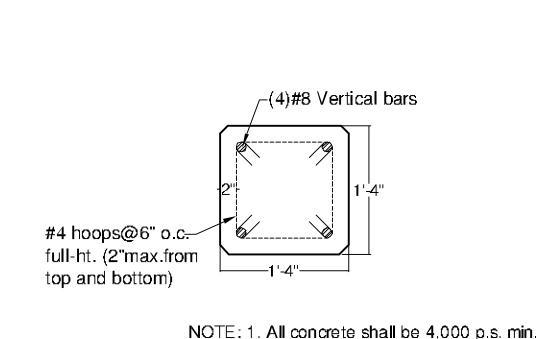

2. Provide standard 90 hook at top of verts. 3. Lap bars 3'-0" as requ'd.



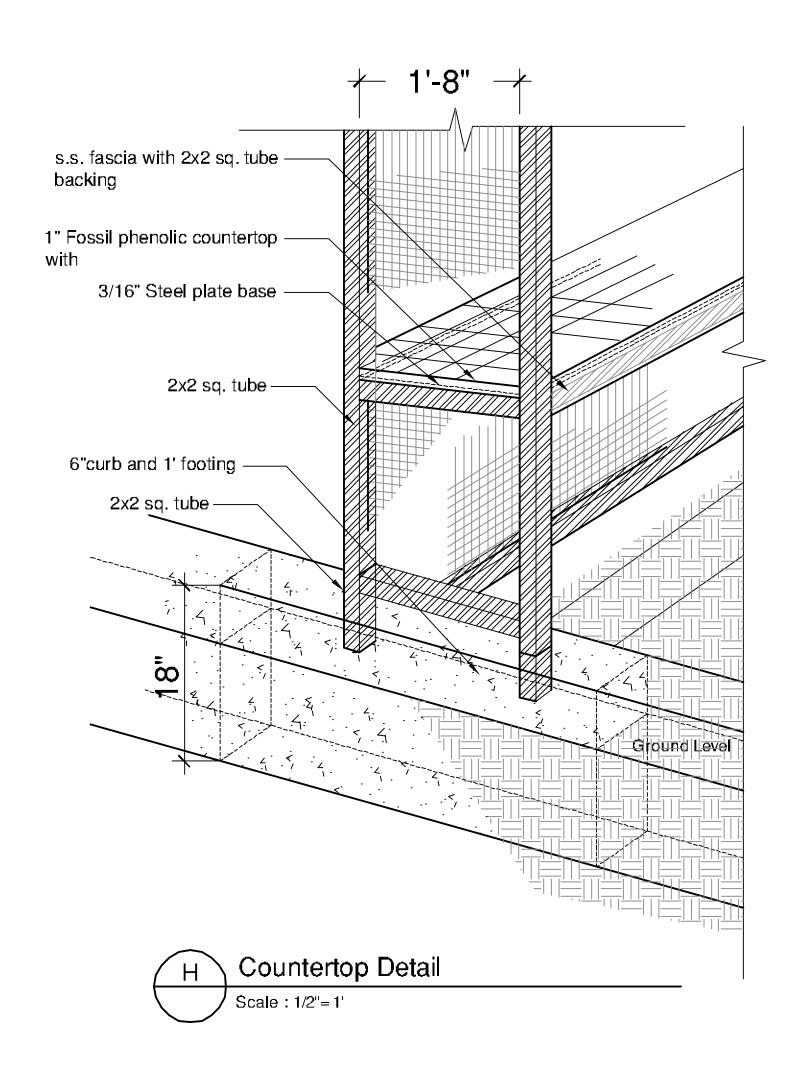

Planter w/ Footings Detail

## >>>CAUTION< **CALL BEFORE YOU DIG!**

NOT LESS THAN TWO OR MORE THAN TEN BUSINESS DAYS PRIOR TO COMMENCING EXCAVATION OR DEMOLITION. SECURE THE SERVICES OF A COMMERCIAL UNDERGROUND UTILITIES LOCATOR SERVICE TO IDENTIFY BELOW-GROUND IMPROVEMENTS THAT MAY NOT BE INDICATED ON THE DRAWINGS. FOR IRRIGATION SYSTEMS, CALL SEATTLE PARKS PLUMBING SHOP (206 684 7070)

>>800 424 5555<<

Parks Department Inspection Hotline
Allow 24 Hours Notice
206-684-7034

## **BID DOCUMENTS**

2		
<u>-</u> 1		
NO.	REVISION - AS BUILT	DAT



BARKER LANDSCAPE ARCHITECTS

1514 NW 52nd St. Seattle, WA 98107 tel 206.783.2870 fax 206.783.3212



## BALLARD CORNERS **PARK**

## Corner Entry Structure Details

Details						
DESIGNED	DATE 1-10-08					
DRAWN CHECKED		SHEET 1 2	_ OF _	13		
ORDINANCE NO		L12	L12.0			
SCALE						