




USB-C SUPPORTS POWER AND PROGRAMMING

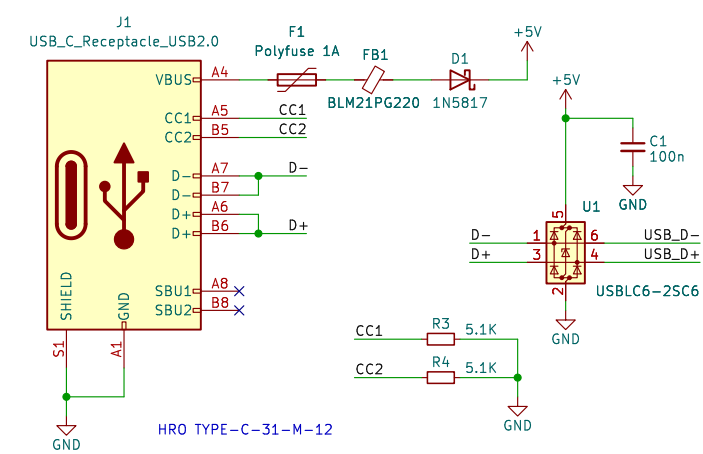


LDO WITH INDICATOR

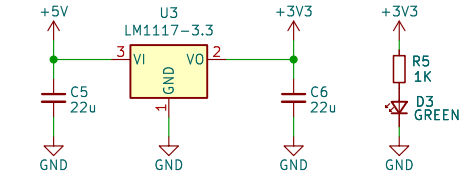


BOOT BUTTON

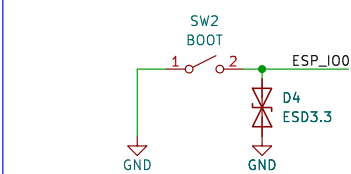


LED Strip - testing

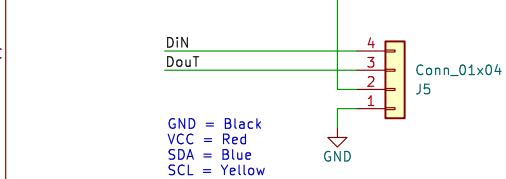


I/O

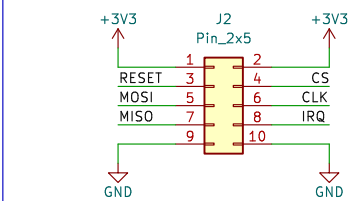

T+H SENSOR

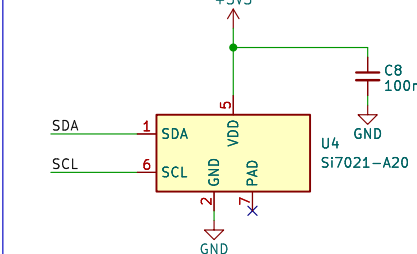

ESP32-S3 MODULE

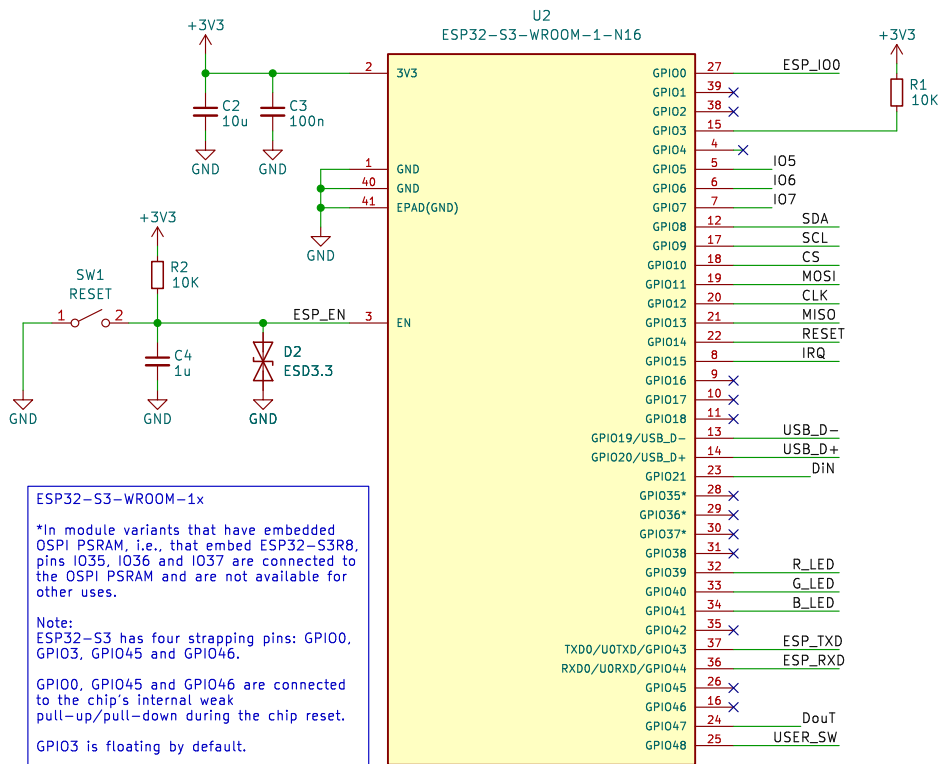

ESP32-S3-WROOM-1x

*In module variants that have embedded OSPI PSRAM, i.e., that embed ESP32-S3R8, pins I035, I036 and I037 are connected to the OSPI PSRAM and are not available for other uses.

Note:
ESP32-S3 has four strapping pins: GPIO0, GPIO3, GPIO45 and GPIO46.
GPIO0, GPIO45 and GPIO46 are connected to the chip's internal weak pull-up/pull-down during the chip reset.
GPIO3 is floating by default.

