

Paper B-01: Unified Infrastructure: A Constraint-Driven Flux Dynamics (CDFD) Perspective

Steve Bico Mujjabi, MD

Independent Researcher

Founder, Vura Labs

Kampala, Uganda

ORCID: 0009-0001-0556-5516

May 2026

Abstract

This paper develops a falsifiable CDFD/AFL model of Unified Infrastructure. It maps demand across energy, water, transport, communication, and public services to driving flux Φ , component capacity, coupling, dependency, and maintenance limits to active constraint C , redundancy, rerouting, control, repair, and demand management to responsiveness S , and aging, backlog, design choices, and prior incidents to structural memory M_s . The target outcome is service continuity, cascade size, restoration, and equity, tested against sensor streams, service logs, asset registers, dependency maps, and incident records. The paper treats universality as a shared model architecture rather than an assertion that unlike systems have the same material mechanism. It states the negative result that would make the mapping unnecessary and places the domain claim inside the cumulative CDFD programme and its reproducible runtime boundary.

Symbol Conventions

CDFD/AFL Part IV symbol convention.

Symbol	Part IV meaning	Cross-domain reading
Φ	Driving flux or throughput	Energy, matter, signal, capital, information, traffic, force, or biological load entering a system
C	Active constraint or capacity burden	Bottleneck, resistance, boundary, scarcity, toxicity, regulation, topology, latency, or load-bearing limit
S	Responsiveness or adaptive surface	The system's ability to reconfigure, buffer, route, repair, learn, or preserve function under changing load
M_s	Structural memory	Stored damage, hysteresis, inherited topology, institutional memory, trained weights, ecological legacy, or retained state
Ψ_s	Adaptive operating ratio $(\Phi/C) \cdot S \cdot M_s$	Local bookkeeping gauge for constrained operation, overload, recovery, or regime change; not a universal constant
Λ	Life Number or capstone surplus ratio where explicitly defined	Reserved for Part II-derived life-number notation or synthesis-level surplus measures, never an undefined decoration

Greek-symbol convention.

Symbol	Local role	Interpretation rule
α	Accumulation or reinforcement coefficient	Sets how fast a pathway, constraint, habit, cascade, or retained structure grows under load
β	Relaxation, decay, clearance, or washout coefficient	Sets loss, recovery, damping, forgetting, degradation, or return toward baseline
γ	Coupling, diffusion, redistribution, or transfer coefficient	Sets spread across nodes, layers, tissues, markets, infrastructures, media, or physical phases
δ, ϵ	Perturbation, tolerance, small offset, or numerical guard	Used only as local thresholds, stability margins, measurement tolerances, or stress increments
η, λ, μ, ν	Efficiency, rate, baseline, intensity, or frequency terms	Meaning is fixed by the equation, subscript, and domain-specific proxy in the paragraph where the term appears
ρ, σ, τ, ϕ	Density/correlation, variability/noise, time-scale, phase, or field terms	Local coefficients only; subscripts bind them to the named pathway, domain, or experiment
Ω, Λ	Domain/state space; Life Number where defined	Ω names a modeled state space; Λ carries life-number or synthesis notation only when the paper defines it

1 Series Context

Part I sets the flow-constraint language used here [3]. Part II develops the Life Number and the origins-of-life use of the same notation [4]. Part III applies AFL to biology and medicine

[5]. Part IV [6], DOI <https://doi.org/10.5281/zenodo.20395901>, is the cross-domain stress test: it asks where the notation clarifies measurement, and where it becomes only a metaphor.

2 Introduction

2.1 The Muijabi Universal Capacity Law

Building directly upon the Fundamental Physics (Part I) [3], the **Muijabi Universal Capacity Law** proposes that across all scales—from black hole event horizons to global financial markets and power grids—driving high flux (Φ) against a rigid topological constraint (C) can drive system saturation. When Φ/C approaches critical thresholds, the system does not scale linearly; it undergoes a topological phase transition.

2.2 The Muijabi Universal Memory Law

The **Muijabi Universal Memory Law** frames persistent systemic collapse. When a complex network fails to clear its structural memory (M_s) and its relaxation parameter decays ($\tau_{relax} \rightarrow \infty$), temporary stressors become permanent rigidities. This is the proposed CDFD mechanism behind ecological death, economic depressions, and infrastructural gridlock.

A modern city is a stack of overlapping transport networks. A failure in the electrical grid instantly impacts the water pumping stations; a flooded highway halts the delivery of fuel to backup generators. These networks are not isolated; they are thermodynamically coupled.

CDFD provides a common audit language for this coupling. Traffic, packet routing, and blood flow have different governing mechanisms, but each can be tested for measurable bottlenecks, network dependence, overload, and recovery.

3 The Meta-Infrastructural Adaptive Surface

We govern the unified infrastructure using the Universal Adaptive Ratio:

$$\Psi_s = \left(\frac{\Phi}{C} \right) \cdot S \cdot M_s \quad (1)$$

For a unified urban grid:

- **Flux** (Φ): The aggregate volumetric throughput of all vital resources (power, water, data, logistics).
- **Constraint** (C): The physical limitations of pipes, wires, and roads, as well as the geographical bottlenecks (e.g., a single bridge connecting two landmasses).
- **Responsiveness** (S): Systemic redundancy and the capacity of the infrastructure to dynamically reroute flux through alternative physical mediums.
- **Memory** (M_s): Sunk costs and legacy infrastructure. Aging, centralized power plants and century-old water mains represent highly locked structural memory. They force the

topology to remain rigid, incapable of adapting to modern, decentralized flow requirements.

3.1 Cross-Domain Cascading Failure

Consider a severe weather event (e.g., a hurricane). The external environmental constraint C spikes massively. The electrical grid loses a major substation. Its local adaptive ratio drops to $\Psi_s \ll 1$. The power flux Φ_{elec} ceases.

Because the water pumping network relies entirely on Φ_{elec} , the cessation of power acts as an infinite constraint C_{water} on the hydrological network. The water flux Φ_{water} drops to zero. Consequently, hospitals and factories lose their operational responsiveness S .

The failure cascades across domains because the infrastructural memory (M_s) was designed with linear dependencies rather than highly cross-linked, decentralized redundancy. A truly unified, CDFD-optimized infrastructure would feature distributed micro-grids and localized resource generation (high S , low M_s), ensuring that a constraint spike in one physical domain does not force the topological collapse of the others.

4 Measurement Layer

The first job in any domain is to choose proxies before drawing conclusions. Φ may be a rate of material, energy, information, capital, or signal flow. C is the bottleneck that slows or redirects that flow. S measures the system's ability to reconfigure under stress, and M_s records the past load that still changes present behavior. A useful application gives those four terms observable definitions, a time scale, and a failure condition. If a standard domain model explains the same data more cleanly, the CDFD/AFL mapping should give way.

4.1 Current Runtime Diagnostic: Universal Network Cascade

The release-local discovery script keeps this paper tied to the current CDFD Runtime [7], including RK4 field updates, surface dynamics, structural-memory diffusion, and a finite-value audit. In the 2026-06-04 runtime pass, the localized hub-drive stress test ended with hub $\Psi_s = 5.21$, peak network $\Psi_s = 5.21$, 21 nodes above $\Psi_s > 1.5$, and 37 maximum memory-locked nodes. I treat those numbers as a runtime sanity check and as a target for later domain measurement, not as a substitute for field data.

5 Major Universal Upgrade: Mechanism, Scale, and Tests

5.1 Observable Translation

The paper-specific translation begins with an observable chain rather than a verbal analogy. For Unified Infrastructure, the proposed drive is demand across energy, water, transport, communication, and public services. The active limitation is component capacity, coupling, dependency, and maintenance limits. Responsiveness is carried by redundancy, rerouting, control, repair, and demand management, while retained state is represented by aging, backlog, design choices,

and prior incidents. The outcome to explain is service continuity, cascade size, restoration, and equity.

Table 1: Operational CDFD/AFL map for Paper B-01.

Term	Paper-specific observable meaning	Measurement question
Φ	demand across energy, water, transport, communication, and public services	What rate, load, gradient, or demand enters the focal system?
C	component capacity, coupling, dependency, and maintenance limits	Which measured bottleneck limits transfer, function, or recovery?
S	redundancy, rerouting, control, repair, and demand management	Which process changes effective capacity or reroutes the load?
M_s	aging, backlog, design choices, and prior incidents	Which retained state makes equal present loads produce different futures?
Y	service continuity, cascade size, restoration, and equity	Which outcome is predicted out of sample, with uncertainty?

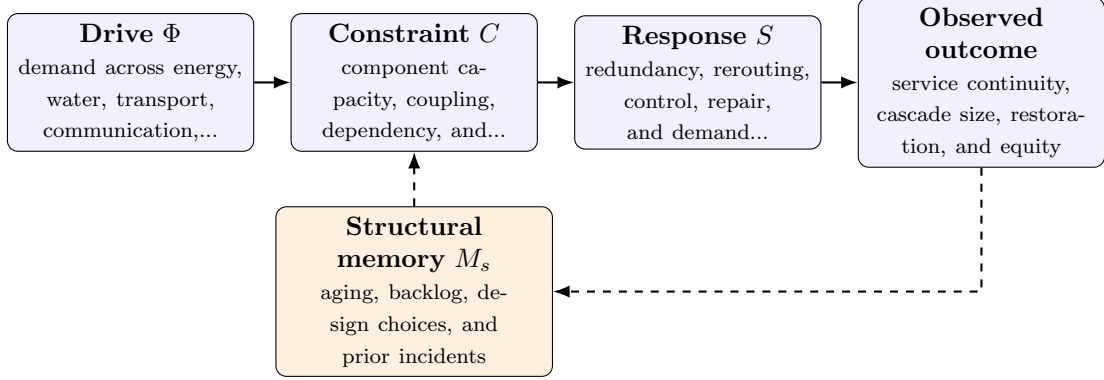


Figure 1: Paper B-01 observable CDFD/AFL architecture for Unified Infrastructure. Solid arrows give the proposed forward chain; dashed arrows make history-dependent feedback explicit.

5.2 Minimal Coupled Model

A paper-level model must separate throughput, constraint accumulation, response, and history. One deliberately minimal form is

$$Y(t) = \frac{\Phi(t)S(t)}{\epsilon + C(t)}, \quad (2)$$

$$\frac{dC}{dt} = \alpha\Phi(t) - \beta S(t)C(t) + \gamma\mathcal{L}C(t), \quad (3)$$

$$\frac{dM_s}{dt} = \eta C(t) - \mu M_s(t), \quad (4)$$

$$\Psi_s(t) = \frac{\hat{\Phi}(t)}{\epsilon + \hat{C}(t)} \hat{S}(t) [1 + \omega \hat{M}_s(t)]. \quad (5)$$

Here Y is the measured output, $\epsilon > 0$ prevents a singular denominator, $\mathcal{L}$ is a spatial or network coupling operator, and hats denote explicitly normalized variables. The sign and magnitude of ω must be estimated: memory can preserve useful organization or amplify damage. No fixed threshold is universal before the variables, normalization, and observation scale are declared.

For this paper, the hypothesized causal sequence is specific. A change in demand across energy, water, transport, communication, and public services arrives faster than redundancy, rerouting, control, repair, and demand management can compensate. This raises or redistributes component capacity, coupling, dependency, and maintenance limits. If the load persists, the retained state encoded by aging, backlog, design choices, and prior incidents changes the next response, so a later event of equal magnitude can produce a different trajectory in service continuity, cascade size, restoration, and equity. The scientific task is to estimate that sequence against the best ordinary model of the domain, not merely to redescribe the outcome after it occurs.

5.3 Cross-Scale Universality Without Mechanistic Erasure

For the engineered systems family, the universal comparison is between demand, designed capacity, feedback control, dependency topology, and accumulated technical state. The strongest engineering use is prospective: the mapping must identify a bottleneck, a control action, or a recovery signature before the failure occurs. [2, 9, 8, 1] The CDFD programme is cumulative: Part I supplies the flow-constraint foundation [3]; Part II asks when maintained throughput supports persistent organized states [4]; Part III develops adaptive limitation and biological memory [5]; and Part IV [6] tests how much of that architecture survives translation. The CDFD Runtime [7] supplies a reproducible numerical stress surface, but it does not substitute for the domain evidence named here.

The required scale declaration for this paper is milliseconds to decades; components to national infrastructure. At short scales, the key question is whether the incoming drive is transmitted, buffered, or diverted. At intermediate scales, response changes effective capacity and network exposure. At long scales, retained structure can alter the state space itself. A result is genuinely cross-scale only when the aggregation rule is stated and the same conclusion is not an artifact of averaging.

5.4 Evidence Ladder and Discriminating Tests

Table 2: Evidence ladder for Paper B-01. Each rung can fail independently.

Test	Design	Discriminating result
Proxy audit	Measure sensor streams, service logs, asset registers, dependency maps, and incident records and preregister how each record maps to Φ , C , S , M_s , and Y .	The mapping fails if proxies are non-identifiable, circular, or change meaning across cases.
Load ramp	Apply or observe a localized component loss during peak cross-service demand while estimating the dominant constraint and response time.	A threshold claim requires a reproducible nonlinear change and uncertainty bounds, not a visually chosen breakpoint.
Recovery and memory	Match present load across units with different histories, then compare recovery paths.	The memory claim requires history-dependent divergence after current conditions are controlled.
Model comparison	Compare the baseline domain model with and without the CDFD/AFL state variables using held-out data.	The paper’s stated falsifier is: coupled CDFD variables do not improve failure or restoration prediction.

The strongest practical design combines a prospective perturbation with a recovery window. The load-ramp phase estimates where constraint begins to rise faster than output. The recovery phase estimates β and μ , separating fast relaxation from persistent memory. A topology or coupling intervention then asks whether rerouting changes the cascade as predicted. Null results are informative because they identify domains in which the universal notation adds no measurable value.

5.5 Research Programme and Boundary Conditions

The immediate research programme has four steps. First, construct a documented dataset from sensor streams, service logs, asset registers, dependency maps, and incident records and retain raw units before normalization. Second, fit a baseline domain model and report its calibration and out-of-sample error. Third, add the smallest identifiable CDFD/AFL state extension and test whether it improves prediction of service continuity, cascade size, restoration, and equity. Fourth, repeat the analysis across the declared scale range and publish negative cases as part of the universality audit.

Three boundaries are non-negotiable. Correlation between flow and failure does not identify a constraint mechanism. A fitted memory term does not prove that the stored state has the same material meaning in another domain. Finally, a runtime cascade is evidence about the implementation, not evidence that the real system follows it. The paper becomes stronger when it can say precisely where the translation stops.

6 Conclusion

Engineered infrastructure is a macroscopic organism. Treating power, water, and transit as separate entities defies the basic laws of thermodynamics. By utilizing CDFD, urban planners can design globally coupled, highly elastic infrastructures that natively resist cross-domain cascading failures, ensuring the continuous survival of the metropolitan active surface.

Conflict of Interest

The author declares no conflict of interest.

Data Availability

Part-specific runtime diagnostics are under each Part's `outputs/` directory.

Release-wide code: `Part_E_Synthesis/supplementary/`.

Generated summaries: `Part_E_Synthesis/outputs/`.

Figures: `Part_E_Synthesis/figures/`.

7 Reference Layer

References

- [1] Per Bak, Chao Tang, and Kurt Wiesenfeld. Self-organized criticality: An explanation of the $1/f$ noise. *Physical Review Letters*, 59(4):381–384, 1987. DOI: <https://doi.org/10.1103/PhysRevLett.59.381>.
- [2] Albert-Laszlo Barabasi and Reka Albert. Emergence of scaling in random networks. *Science*, 286(5439):509–512, 1999. DOI: <https://doi.org/10.1126/science.286.5439.509>.
- [3] Steve Bico Mujjabi. Cdfd part i: Fundamental physics - constraint-driven field theory and flux dynamics, 2026. DOI: <https://doi.org/10.5281/zenodo.20250821>.
- [4] Steve Bico Mujjabi. Cdfd part ii: Origins of life and tri-regime bioenergetics - constraint-driven flux dynamics, 2026. DOI: <https://doi.org/10.5281/zenodo.20264779>.
- [5] Steve Bico Mujjabi. Cdfd part iii: Adaptive flux limitation biology and medicine - constraint-driven flux dynamics, 2026. DOI: <https://doi.org/10.5281/zenodo.20344695>.
- [6] Steve Bico Mujjabi. Cdfd part iv: Universal adaptive flux limitation - constraint-driven flux dynamics, 2026. DOI: <https://doi.org/10.5281/zenodo.20395901>.
- [7] Steve Bico Mujjabi. Cdfd runtime: Constraint-driven flux dynamics and cdfd execution engine, 2026. DOI: <https://doi.org/10.5281/zenodo.20343160>.
- [8] Claude E. Shannon. A mathematical theory of communication. *Bell System Technical Journal*, 27(3):379–423, 1948. DOI: <https://doi.org/10.1002/j.1538-7305.1948.tb01338.x>.
- [9] Duncan J. Watts and Steven H. Strogatz. Collective dynamics of small-world networks. *Nature*, 393:440–442, 1998. DOI: <https://doi.org/10.1038/30918>.