

Paper B-02: Electrical Grids: A Constraint-Driven Flux Dynamics (CDFD) Perspective

Steve Bico Mujjabi, MD

Independent Researcher

Founder, Vura Labs

Kampala, Uganda

ORCID: 0009-0001-0556-5516

May 2026

Abstract

This paper develops a falsifiable CDFD/AFL model of Electrical Grids. It maps electrical demand, generation, and renewable variability to driving flux Φ , thermal limits, stability margins, transmission, and reserve capacity to active constraint C , dispatch, storage, demand response, protection, and islanding to responsiveness S , and equipment aging, network state, prior contingencies, and operator learning to structural memory M_s . The target outcome is frequency stability, congestion, unserved energy, and restoration, tested against phasor measurements, dispatch records, topology, outage logs, and asset health. The paper treats universality as a shared model architecture rather than an assertion that unlike systems have the same material mechanism. It states the negative result that would make the mapping unnecessary and places the domain claim inside the cumulative CDFD programme and its reproducible runtime boundary.

Symbol Conventions

CDFD/AFL Part IV symbol convention.

Symbol	Part IV meaning	Cross-domain reading
Φ	Driving flux or throughput	Energy, matter, signal, capital, information, traffic, force, or biological load entering a system
C	Active constraint or capacity burden	Bottleneck, resistance, boundary, scarcity, toxicity, regulation, topology, latency, or load-bearing limit
S	Responsiveness or adaptive surface	The system's ability to reconfigure, buffer, route, repair, learn, or preserve function under changing load
M_s	Structural memory	Stored damage, hysteresis, inherited topology, institutional memory, trained weights, ecological legacy, or retained state
Ψ_s	Adaptive operating ratio $(\Phi/C) \cdot S \cdot M_s$	Local bookkeeping gauge for constrained operation, overload, recovery, or regime change; not a universal constant
Λ	Life Number or capstone surplus ratio where explicitly defined	Reserved for Part II-derived life-number notation or synthesis-level surplus measures, never an undefined decoration

Greek-symbol convention.

Symbol	Local role	Interpretation rule
α	Accumulation or reinforcement coefficient	Sets how fast a pathway, constraint, habit, cascade, or retained structure grows under load
β	Relaxation, decay, clearance, or washout coefficient	Sets loss, recovery, damping, forgetting, degradation, or return toward baseline
γ	Coupling, diffusion, redistribution, or transfer coefficient	Sets spread across nodes, layers, tissues, markets, infrastructures, media, or physical phases
δ, ϵ	Perturbation, tolerance, small offset, or numerical guard	Used only as local thresholds, stability margins, measurement tolerances, or stress increments
η, λ, μ, ν	Efficiency, rate, baseline, intensity, or frequency terms	Meaning is fixed by the equation, subscript, and domain-specific proxy in the paragraph where the term appears
ρ, σ, τ, ϕ	Density/correlation, variability/noise, time-scale, phase, or field terms	Local coefficients only; subscripts bind them to the named pathway, domain, or experiment
Ω, Λ	Domain/state space; Life Number where defined	Ω names a modeled state space; Λ carries life-number or synthesis notation only when the paper defines it

1 Series Context

Part I sets the flow-constraint language used here [3]. Part II develops the Life Number and the origins-of-life use of the same notation [4]. Part III applies AFL to biology and medicine

[5]. Part IV [6], DOI <https://doi.org/10.5281/zenodo.20395901>, is the cross-domain stress test: it asks where the notation clarifies measurement, and where it becomes only a metaphor.

2 Introduction

2.1 The Muijabi Universal Capacity Law

Building directly upon the Fundamental Physics (Part I) [3], the **Muijabi Universal Capacity Law** proposes that across all scales—from black hole event horizons to global financial markets and power grids—driving high flux (Φ) against a rigid topological constraint (C) can drive system saturation. When Φ/C approaches critical thresholds, the system does not scale linearly; it undergoes a topological phase transition.

2.2 The Muijabi Universal Memory Law

The **Muijabi Universal Memory Law** frames persistent systemic collapse. When a complex network fails to clear its structural memory (M_s) and its relaxation parameter decays ($\tau_{relax} \rightarrow \infty$), temporary stressors become permanent rigidities. This is the proposed CDFD mechanism behind ecological death, economic depressions, and infrastructural gridlock.

A power grid must perfectly balance electricity generation and consumption at every millisecond. When a transmission line trips due to a fault (e.g., a tree striking a wire), the current it was carrying instantly reroutes through adjacent lines. If those lines are already near their thermal capacity, they too will overheat and trip, triggering a chain reaction that can darken entire continents.

Engineers treat this as an operational reliability problem. CDFD treats it as a universal topological phenomenon. The grid is an active, constrained flow network attempting to maintain a critical mathematical equilibrium.

3 The Grid as an Active Transport Surface

We govern the electrical network using the Universal Adaptive Ratio:

$$\Psi_s = \left(\frac{\Phi}{C} \right) \cdot S \cdot M_s \quad (1)$$

For a node (substation) in the power grid:

- **Flux (Φ):** The active power flow (Megawatts) passing through the node.
- **Constraint (C):** The electrical impedance of the transmission lines and the hard thermal limits of the transformers.
- **Responsiveness (S):** The grid’s spinning reserve, battery capacitance, and the ability of automated relays to dynamically reroute power.

- **Memory (M_s):** The physical, hardwired topology of the grid. Unlike the internet, which can dynamically rewrite software routes, power grid topology is highly rigid. This high memory locks the system’s physical constraints into place.

3.1 The Anatomy of a Cascading Blackout

In standard operation, the grid remains near $\Psi_s \approx 1$. The generated flux Φ is comfortably handled by the constraints C .

When a major transmission line faults, its effective constraint C instantly becomes infinite. The massive flux Φ it was carrying must redirect to a neighboring node. At this neighboring node, Φ spikes drastically. Because the physical wiring (the memory M_s) is rigid, the node’s responsiveness S cannot scale fast enough to accommodate the surge.

The node enters a severe over-flux regime ($\Psi_s \gg 1$). The intense flow physically damages the constraint structures (thermal melting of the line). To prevent total physical destruction, automated safety relays trip the line, effectively dropping $S \rightarrow 0$ and intentionally forcing the node into a dead state ($\Psi_s = 0$).

The flux Φ is then displaced again to the next neighbor, creating a moving wave of $\Psi_s \gg 1$ anomalies that systematically annihilate the network’s active surface. This is a **Cascading Blackout**—the engineered equivalent of an ecological collapse.

4 Measurement Layer

The first job in any domain is to choose proxies before drawing conclusions. Φ may be a rate of material, energy, information, capital, or signal flow. C is the bottleneck that slows or redirects that flow. S measures the system’s ability to reconfigure under stress, and M_s records the past load that still changes present behavior. A useful application gives those four terms observable definitions, a time scale, and a failure condition. If a standard domain model explains the same data more cleanly, the CDFD/AFL mapping should give way.

4.1 Current Runtime Diagnostic: Universal Network Cascade

The release-local discovery script keeps this paper tied to the current CDFD Runtime [7], including RK4 field updates, surface dynamics, structural-memory diffusion, and a finite-value audit. In the 2026-06-04 runtime pass, the localized hub-drive stress test ended with hub $\Psi_s = 5.21$, peak network $\Psi_s = 5.21$, 21 nodes above $\Psi_s > 1.5$, and 37 maximum memory-locked nodes. I treat those numbers as a runtime sanity check and as a target for later domain measurement, not as a substitute for field data.

5 Major Universal Upgrade: Mechanism, Scale, and Tests

5.1 Observable Translation

The paper-specific translation begins with an observable chain rather than a verbal analogy. For Electrical Grids, the proposed drive is electrical demand, generation, and renewable variability.

The active limitation is thermal limits, stability margins, transmission, and reserve capacity. Responsiveness is carried by dispatch, storage, demand response, protection, and islanding, while retained state is represented by equipment aging, network state, prior contingencies, and operator learning. The outcome to explain is frequency stability, congestion, unserved energy, and restoration.

Table 1: Operational CDFD/AFL map for Paper B-02.

Term	Paper-specific observable meaning	Measurement question
Φ	electrical demand, generation, and renewable variability	What rate, load, gradient, or demand enters the focal system?
C	thermal limits, stability margins, transmission, and reserve capacity	Which measured bottleneck limits transfer, function, or recovery?
S	dispatch, storage, demand response, protection, and islanding	Which process changes effective capacity or reroutes the load?
M_s	equipment aging, network state, prior contingencies, and operator learning	Which retained state makes equal present loads produce different futures?
Y	frequency stability, congestion, unserved energy, and restoration	Which outcome is predicted out of sample, with uncertainty?

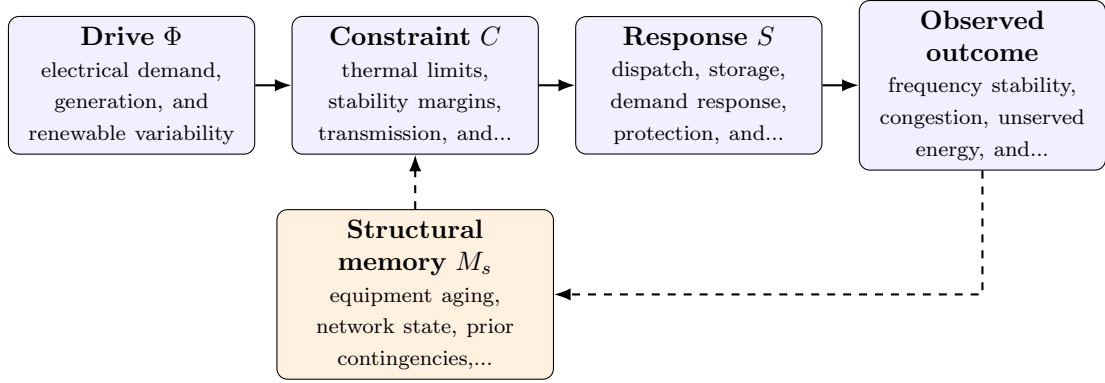


Figure 1: Paper B-02 observable CDFD/AFL architecture for Electrical Grids. Solid arrows give the proposed forward chain; dashed arrows make history-dependent feedback explicit.

5.2 Minimal Coupled Model

A paper-level model must separate throughput, constraint accumulation, response, and history. One deliberately minimal form is

$$Y(t) = \frac{\Phi(t)S(t)}{\epsilon + C(t)}, \quad (2)$$

$$\frac{dC}{dt} = \alpha\Phi(t) - \beta S(t)C(t) + \gamma\mathcal{L}C(t), \quad (3)$$

$$\frac{dM_s}{dt} = \eta C(t) - \mu M_s(t), \quad (4)$$

$$\Psi_s(t) = \frac{\hat{\Phi}(t)}{\epsilon + \hat{C}(t)} \hat{S}(t) [1 + \omega \hat{M}_s(t)]. \quad (5)$$

Here Y is the measured output, $\epsilon > 0$ prevents a singular denominator, $\mathcal{L}$ is a spatial or network coupling operator, and hats denote explicitly normalized variables. The sign and magnitude of

ω must be estimated: memory can preserve useful organization or amplify damage. No fixed threshold is universal before the variables, normalization, and observation scale are declared.

For this paper, the hypothesized causal sequence is specific. A change in electrical demand, generation, and renewable variability arrives faster than dispatch, storage, demand response, protection, and islanding can compensate. This raises or redistributes thermal limits, stability margins, transmission, and reserve capacity. If the load persists, the retained state encoded by equipment aging, network state, prior contingencies, and operator learning changes the next response, so a later event of equal magnitude can produce a different trajectory in frequency stability, congestion, unserved energy, and restoration. The scientific task is to estimate that sequence against the best ordinary model of the domain, not merely to redescribe the outcome after it occurs.

5.3 Cross-Scale Universality Without Mechanistic Erasure

For the engineered systems family, the universal comparison is between demand, designed capacity, feedback control, dependency topology, and accumulated technical state. The strongest engineering use is prospective: the mapping must identify a bottleneck, a control action, or a recovery signature before the failure occurs. [2, 9, 8, 1] The CDFD programme is cumulative: Part I supplies the flow-constraint foundation [3]; Part II asks when maintained throughput supports persistent organized states [4]; Part III develops adaptive limitation and biological memory [5]; and Part IV [6] tests how much of that architecture survives translation. The CDFD Runtime [7] supplies a reproducible numerical stress surface, but it does not substitute for the domain evidence named here.

The required scale declaration for this paper is milliseconds to decades; devices to inter-connections. At short scales, the key question is whether the incoming drive is transmitted, buffered, or diverted. At intermediate scales, response changes effective capacity and network exposure. At long scales, retained structure can alter the state space itself. A result is genuinely cross-scale only when the aggregation rule is stated and the same conclusion is not an artifact of averaging.

5.4 Evidence Ladder and Discriminating Tests

The strongest practical design combines a prospective perturbation with a recovery window. The load-ramp phase estimates where constraint begins to rise faster than output. The recovery phase estimates β and μ , separating fast relaxation from persistent memory. A topology or coupling intervention then asks whether rerouting changes the cascade as predicted. Null results are informative because they identify domains in which the universal notation adds no measurable value.

5.5 Research Programme and Boundary Conditions

The immediate research programme has four steps. First, construct a documented dataset from phasor measurements, dispatch records, topology, outage logs, and asset health and retain raw units before normalization. Second, fit a baseline domain model and report its calibration

Table 2: Evidence ladder for Paper B-02. Each rung can fail independently.

Test	Design	Discriminating result
Proxy audit	Measure phasor measurements, dispatch records, topology, outage logs, and asset health and preregister how each record maps to Φ , C , S , M_s , and Y .	The mapping fails if proxies are non-identifiable, circular, or change meaning across cases.
Load ramp	Apply or observe a line or generator loss during high demand while estimating the dominant constraint and response time.	A threshold claim requires a reproducible nonlinear change and uncertainty bounds, not a visually chosen breakpoint.
Recovery and memory	Match present load across units with different histories, then compare recovery paths.	The memory claim requires history-dependent divergence after current conditions are controlled.
Model comparison	Compare the baseline domain model with and without the CDFD/AFL state variables using held-out data.	The paper’s stated falsifier is: the mapping adds no value beyond established power-flow and stability models.

and out-of-sample error. Third, add the smallest identifiable CDFD/AFL state extension and test whether it improves prediction of frequency stability, congestion, unserved energy, and restoration. Fourth, repeat the analysis across the declared scale range and publish negative cases as part of the universality audit.

Three boundaries are non-negotiable. Correlation between flow and failure does not identify a constraint mechanism. A fitted memory term does not prove that the stored state has the same material meaning in another domain. Finally, a runtime cascade is evidence about the implementation, not evidence that the real system follows it. The paper becomes stronger when it can say precisely where the translation stops.

6 Conclusion

Power grids are thermodynamic surfaces highly vulnerable to constraint-locking. By utilizing CDFD, grid operators can move beyond localized thermal monitoring and instead track the systemic Ψ_s topology of the network in real-time, deliberately isolating high-flux bottlenecks before they trigger a catastrophic macroscopic phase shift.

Conflict of Interest

The author declares no conflict of interest.

Data Availability

Part-specific runtime diagnostics are under each Part’s `outputs/` directory.

Release-wide code: `Part_E_Synthesis/supplementary/`.

Generated summaries: `Part_E_Synthesis/outputs/`.

Figures: `Part_E_Synthesis/figures/`.

7 Reference Layer

References

- [1] Per Bak, Chao Tang, and Kurt Wiesenfeld. Self-organized criticality: An explanation of the $1/f$ noise. *Physical Review Letters*, 59(4):381–384, 1987. DOI: <https://doi.org/10.1103/PhysRevLett.59.381>.
- [2] Albert-Laszlo Barabasi and Reka Albert. Emergence of scaling in random networks. *Science*, 286(5439):509–512, 1999. DOI: <https://doi.org/10.1126/science.286.5439.509>.
- [3] Steve Bico Mujjabi. Cdfd part i: Fundamental physics - constraint-driven field theory and flux dynamics, 2026. DOI: <https://doi.org/10.5281/zenodo.20250821>.
- [4] Steve Bico Mujjabi. Cdfd part ii: Origins of life and tri-regime bioenergetics - constraint-driven flux dynamics, 2026. DOI: <https://doi.org/10.5281/zenodo.20264779>.
- [5] Steve Bico Mujjabi. Cdfd part iii: Adaptive flux limitation biology and medicine - constraint-driven flux dynamics, 2026. DOI: <https://doi.org/10.5281/zenodo.20344695>.
- [6] Steve Bico Mujjabi. Cdfd part iv: Universal adaptive flux limitation - constraint-driven flux dynamics, 2026. DOI: <https://doi.org/10.5281/zenodo.20395901>.
- [7] Steve Bico Mujjabi. Cdfd runtime: Constraint-driven flux dynamics and cdfd execution engine, 2026. DOI: <https://doi.org/10.5281/zenodo.20343160>.
- [8] Claude E. Shannon. A mathematical theory of communication. *Bell System Technical Journal*, 27(3):379–423, 1948. DOI: <https://doi.org/10.1002/j.1538-7305.1948.tb01338.x>.
- [9] Duncan J. Watts and Steven H. Strogatz. Collective dynamics of small-world networks. *Nature*, 393:440–442, 1998. DOI: <https://doi.org/10.1038/30918>.