


RoHS COMPLIANT

REV	ECN NO.	DESCRIPTION	DATE
A	460813-A	RELEASE	AUG. 06'13

Specification:

- *Contact Resistance:
 - (1)30m Ohm Max. at 100mA
 - (2)10,000 Cycles After: 40m Ohm Max.at 100mA
- *Rated Voltage: AC 30V
- *Contact Current Rating:
 - (1)Signal Line: 1A/Pin (No. 1 to 5)
 - (2)2-Line For Power: 1.8A/Pin(No. 1 and 5),0.5A/Pin(No. 2 to 4)
- *Insulation Resistance: 100M Ohm Min. At 500V DC
- *Dielectric Withstanding Voltage: 100V AC for 1 Minute
- *Durability (Life Test): 10,000 Cycles Front
- *Insertion Force: 35 Newton Maximum
- *Extraction Force: 8 Newton Minimum.
- *Operating Temperature: -30°C to +85°C
- *Solderability: 260°C±5°C;5 Sec

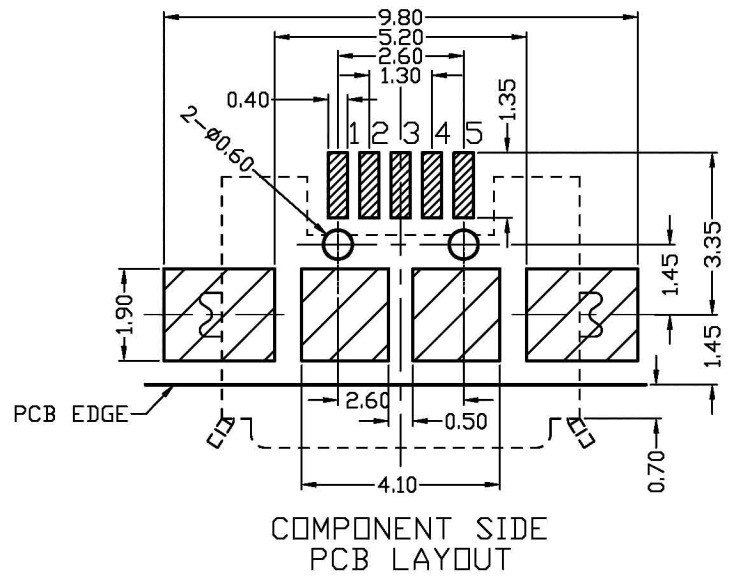

NO.	NAME	MATERIAL	FINISH	Q'TY	REMARK
1	HOUSING	LCP+GF30%	BLACK	1	
2	PIN TERM.	PHOS.BRONZE(EH) ±0.20mm	GOLD PLATED	5	Contact : Gold 30u' Other Area: Gold 1u'
3	SHELL	STAINLESS T=0.25	TIN PLATED(MATTE Sn)	1	TIN: 120~200u'

TOLERANCE UNLESS OTHERWISE SPECIFED			PROJECTION		GOLD-TEK ELECTRIC CO., LTD.	
LINEAR		ANGLE	UNITS		TITLE	
X. ± 0.50	X° ±		MM		Micro USB 5Pin R/A SMT	
.X ± 0.30	.X° ±		SCALE		Shell With SMT Solder	
.XX ± 0.20	.XX° ±		SIZE		Tab, With Post	
.XXX±	.XXX° ±		A4		CPART NO.	
APPD						
CHKD						
DRAW	Z	AUG. 06'2013				

PART NO.		MRUMRB05FTKTY-30U	
CAD NO. I454		SHEET	
F:\PDF\USB\USB-0079		1 OF 1	

圖面編號:GTKSD3043-A(1)