


SPECIFICATION			
VALVE OPENING INTERVAL	- 0.5-35min(adjustable)		
VALE DISCHARGE	- 0.5-20sec(adjustable)		
POWER CONSUMPTION	- 10W		
MAX.OPERATING TEMPERATURE	- 90° C		
MAX.OPERATING PRESSURE	- 16 bar(g)		
ORIFICE	- 6mm		
INLET / OUTLET	- 1/2" BSP(F)		
TYPE	- PILOT OPERATED		
MAX.DISCHARGE @7bar	- 150 Lt/hr		
WEIGHT	- 0.5 Kg		
ELECTRICAL/POWER SUPPLY	-220V±10%,50Hz,1Ph		
QUALITY OF PILOT AIR	-DRY AIR		

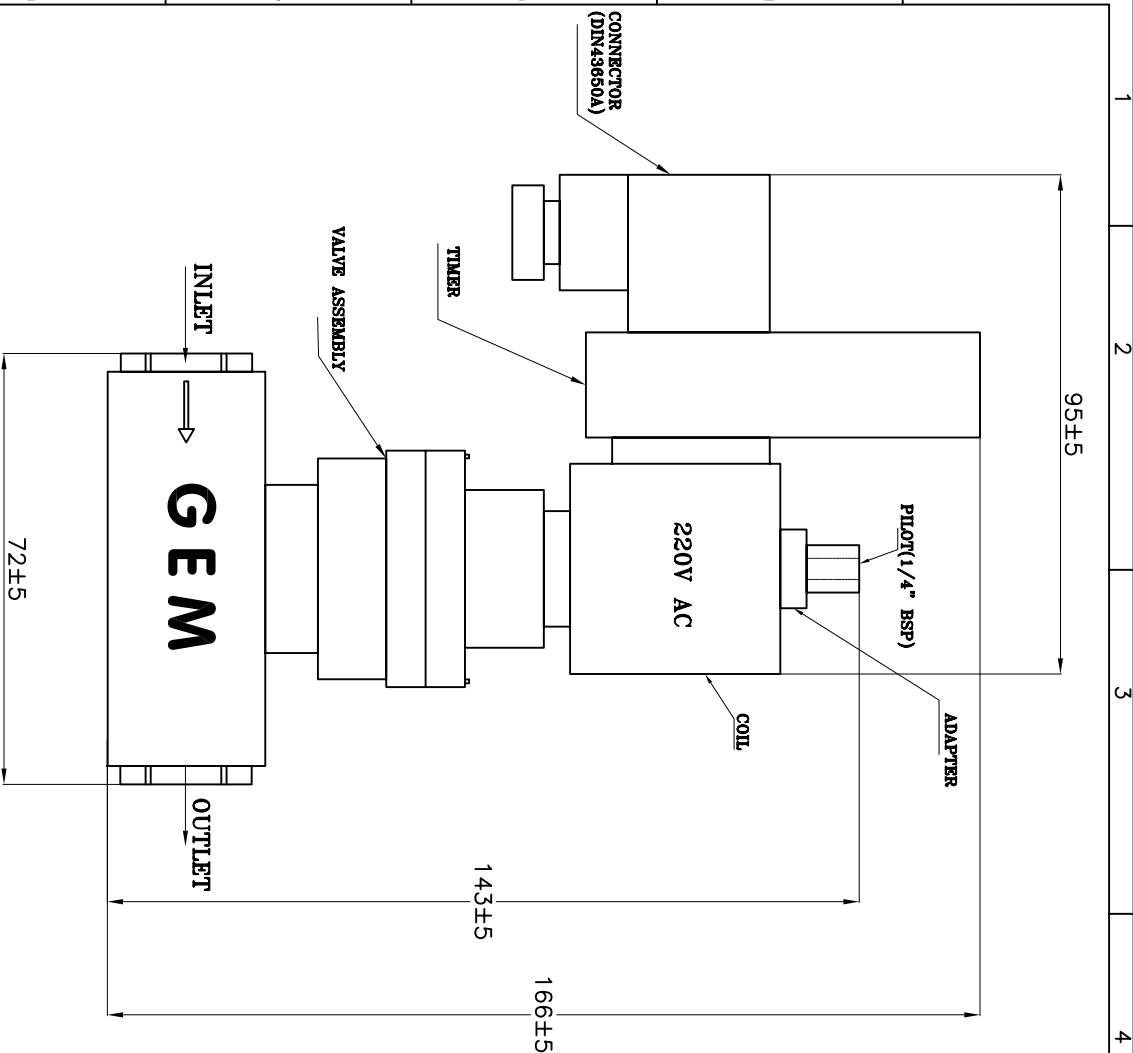

ALL DIMENSIONS ARE IN mm UNLESS OTHERWISE SPECIFIED			
TOLERANCES UNLESS OTHERWISE NOTED			
MACHINED SURFACES AS PER IS : 2102(INMS)			
DIMS.	0.5/6	6/30	30/120
TOL.	±0.1	±0.2	±0.3
UNMACHINED SURFACE ±0.5			
ANGULAR ±1° SURFACE FINISH			
BREAK ALL EDGES 0.1 - 0.25 R			

THIRD ANGLE PROJ.
DRAWN K.B
CHECKED
APPROVED
DATE 7.05.09

GEM EQUIPMENTS LTD	
COIMBATORE-641 407	
TITLE	
GA DRAWING FOR	
AUTO DRAIN VALVE (GZ HD)	
SIZE DWG. NO.	4417 00
SCALE : NTS	SHEET 1 OF 1
REV	0

REG.NO.	NO.	REVISION	NAME	DATE