



Index



PAGE	COMPONENT / FUNCTION
001	1 Index
002	2 BlockDiagram
003	3 Adaptor

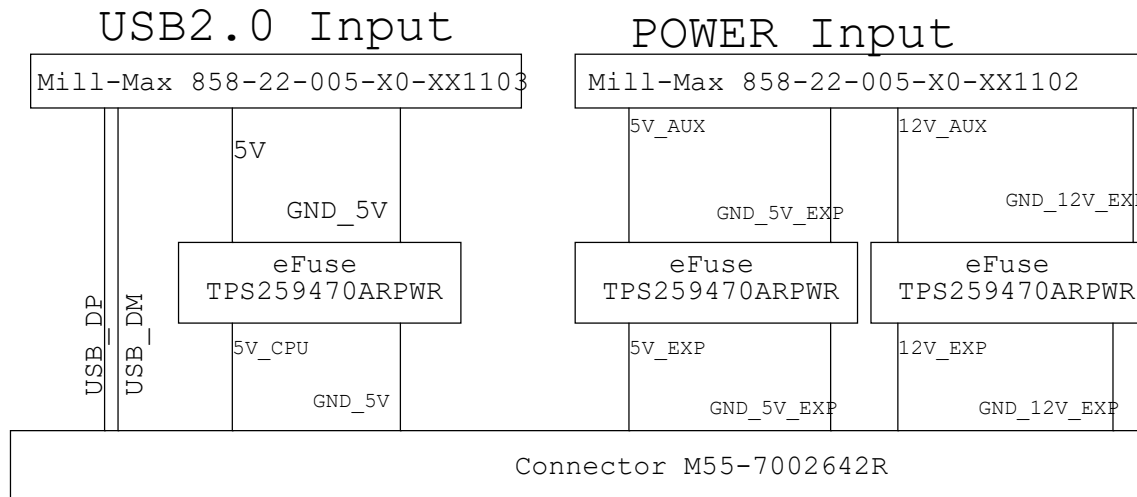






Mill-Max Manufacturing Corp.
858-22-005-10-011101

- ELECTRICAL:
Current rating: 9A/contact
Max current 5A per contact
- ENVIRONMENT:
High temperature resistance: UL94 V-0



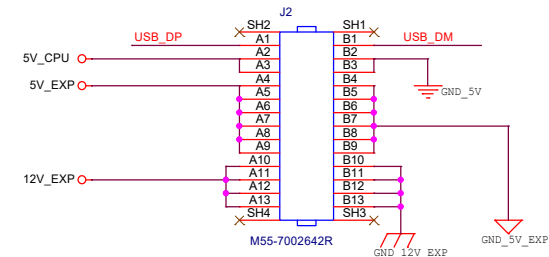
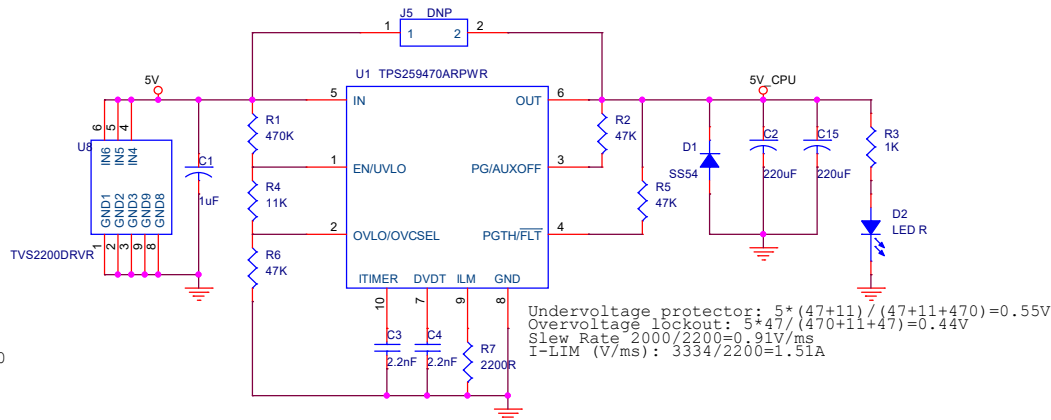


Harwin Inc. M55-7002642R


- ELECTRICAL:
Current rating: 1.2A/Contact
Voltage rating: 100V/Contact
Max current: 0.75A per contact
- Connection: Board to board
- ENVIRONMENT:
Temperature range: -55°C to +125°C
- PHYSICAL:
Pitch: 1.27mm

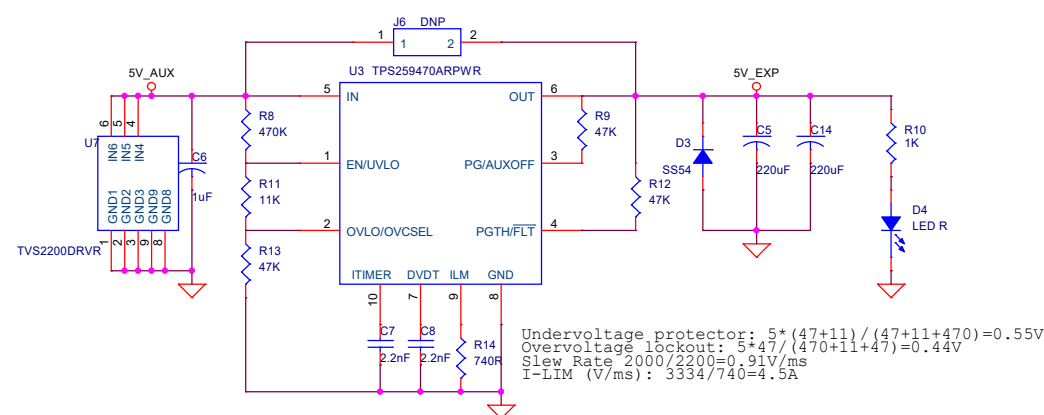

Mounting hole

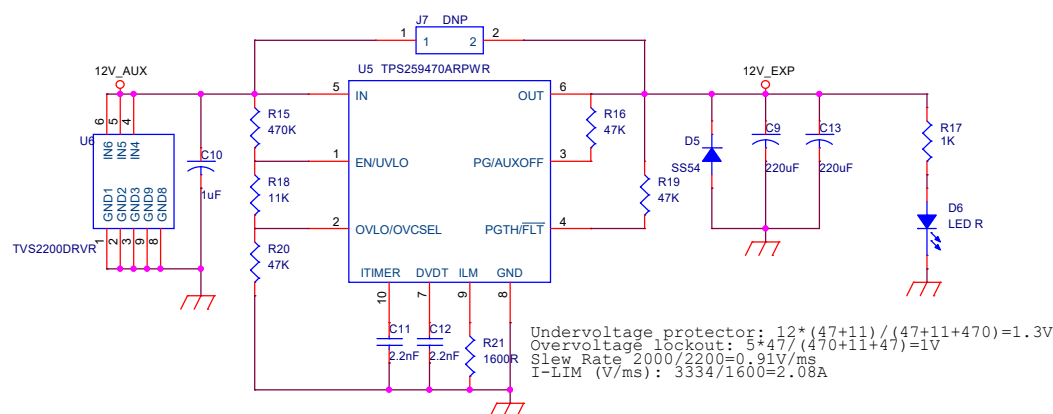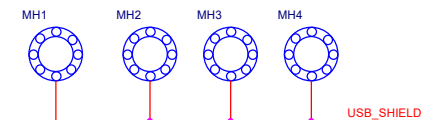

Fiducial



SpaceCinTech

Project: BEE-PC1	Sub-system: Adaptor	Sheet 3 of 3
Designed by: cd	Sheet title: Adaptor	Size: A3
Checked by: Bao Bui	Document no: 3	Date: Oct 3rd, 2024
Approved by: Vu Pham	Revision: V1.0.0	