


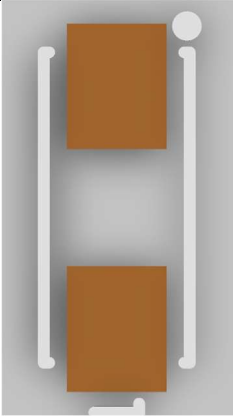
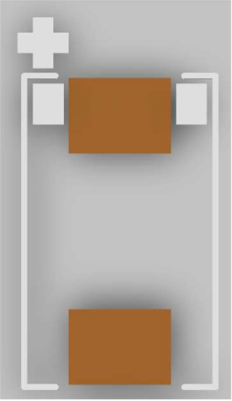

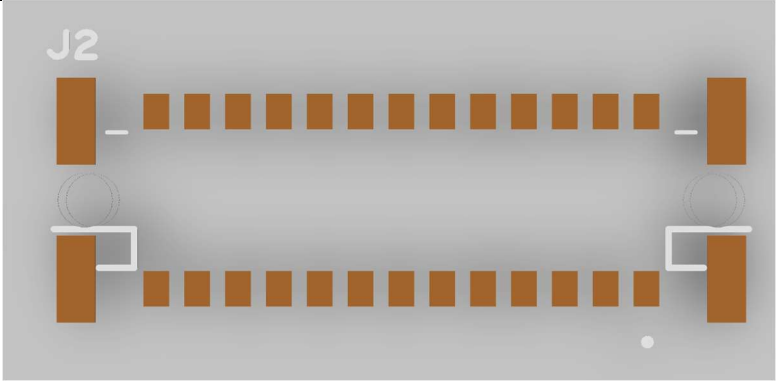
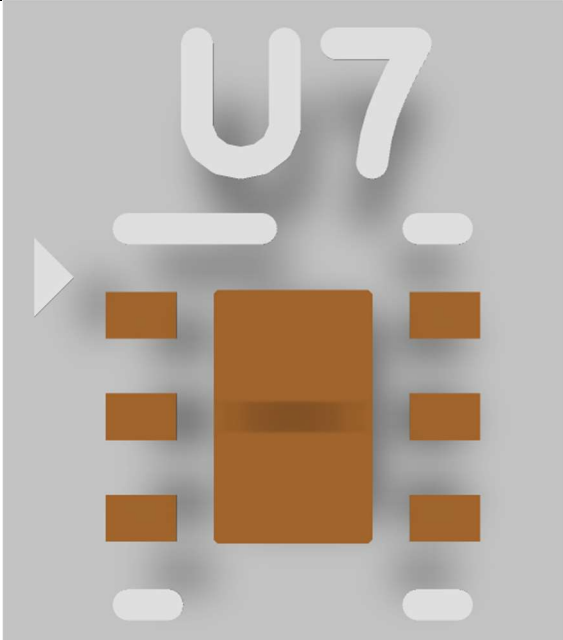
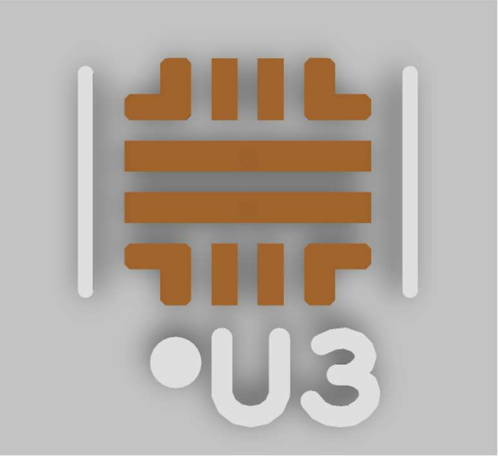
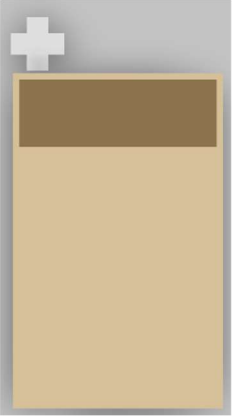

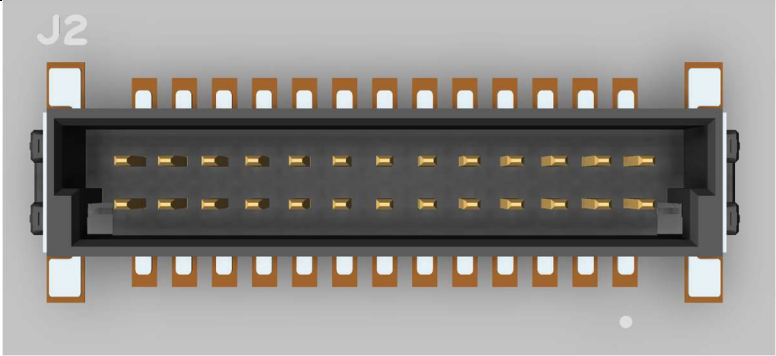
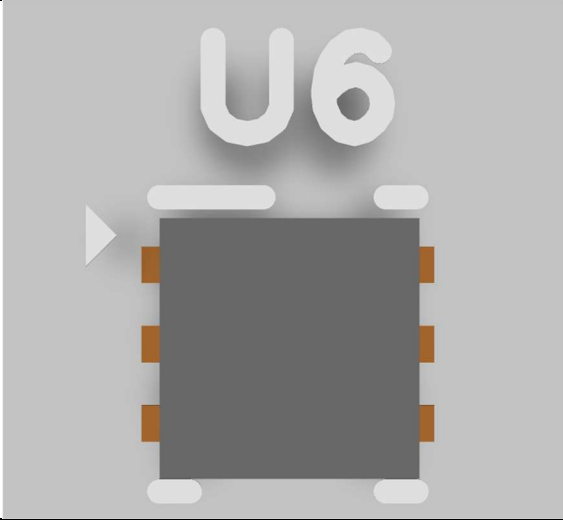


Components that need attention

Footprint	DO214AC_SMA	TAJD_AVX	LED0603	HARWIN_M55-7002642R	DRV0006A	RPW0010A-MFG
Reference	D1, D3, D5	C2,C5, C9, C13, C14, C15	D2, D4, D6	J2	U6, U7, U8	U1, U3, U5
Silk screen draw						
3D			 Cathode (-) Anode (+)			
Note	Dot mark (.) is Cathode (-)	The plus mark (+) is positive of the capacitor.		The ridge of the connector is aligned with the direction of the dot mark (.)	The mark (>) is pin 1 st .	Dot mark (.) is pin 1 st .

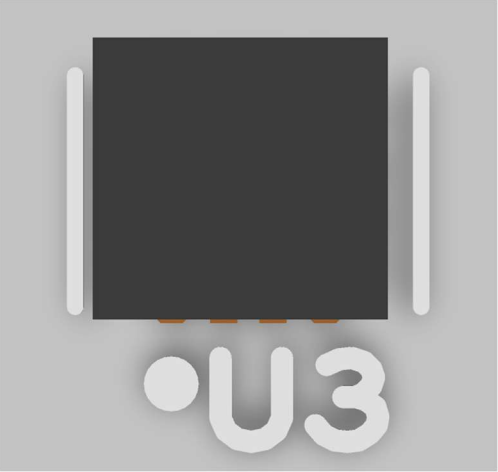

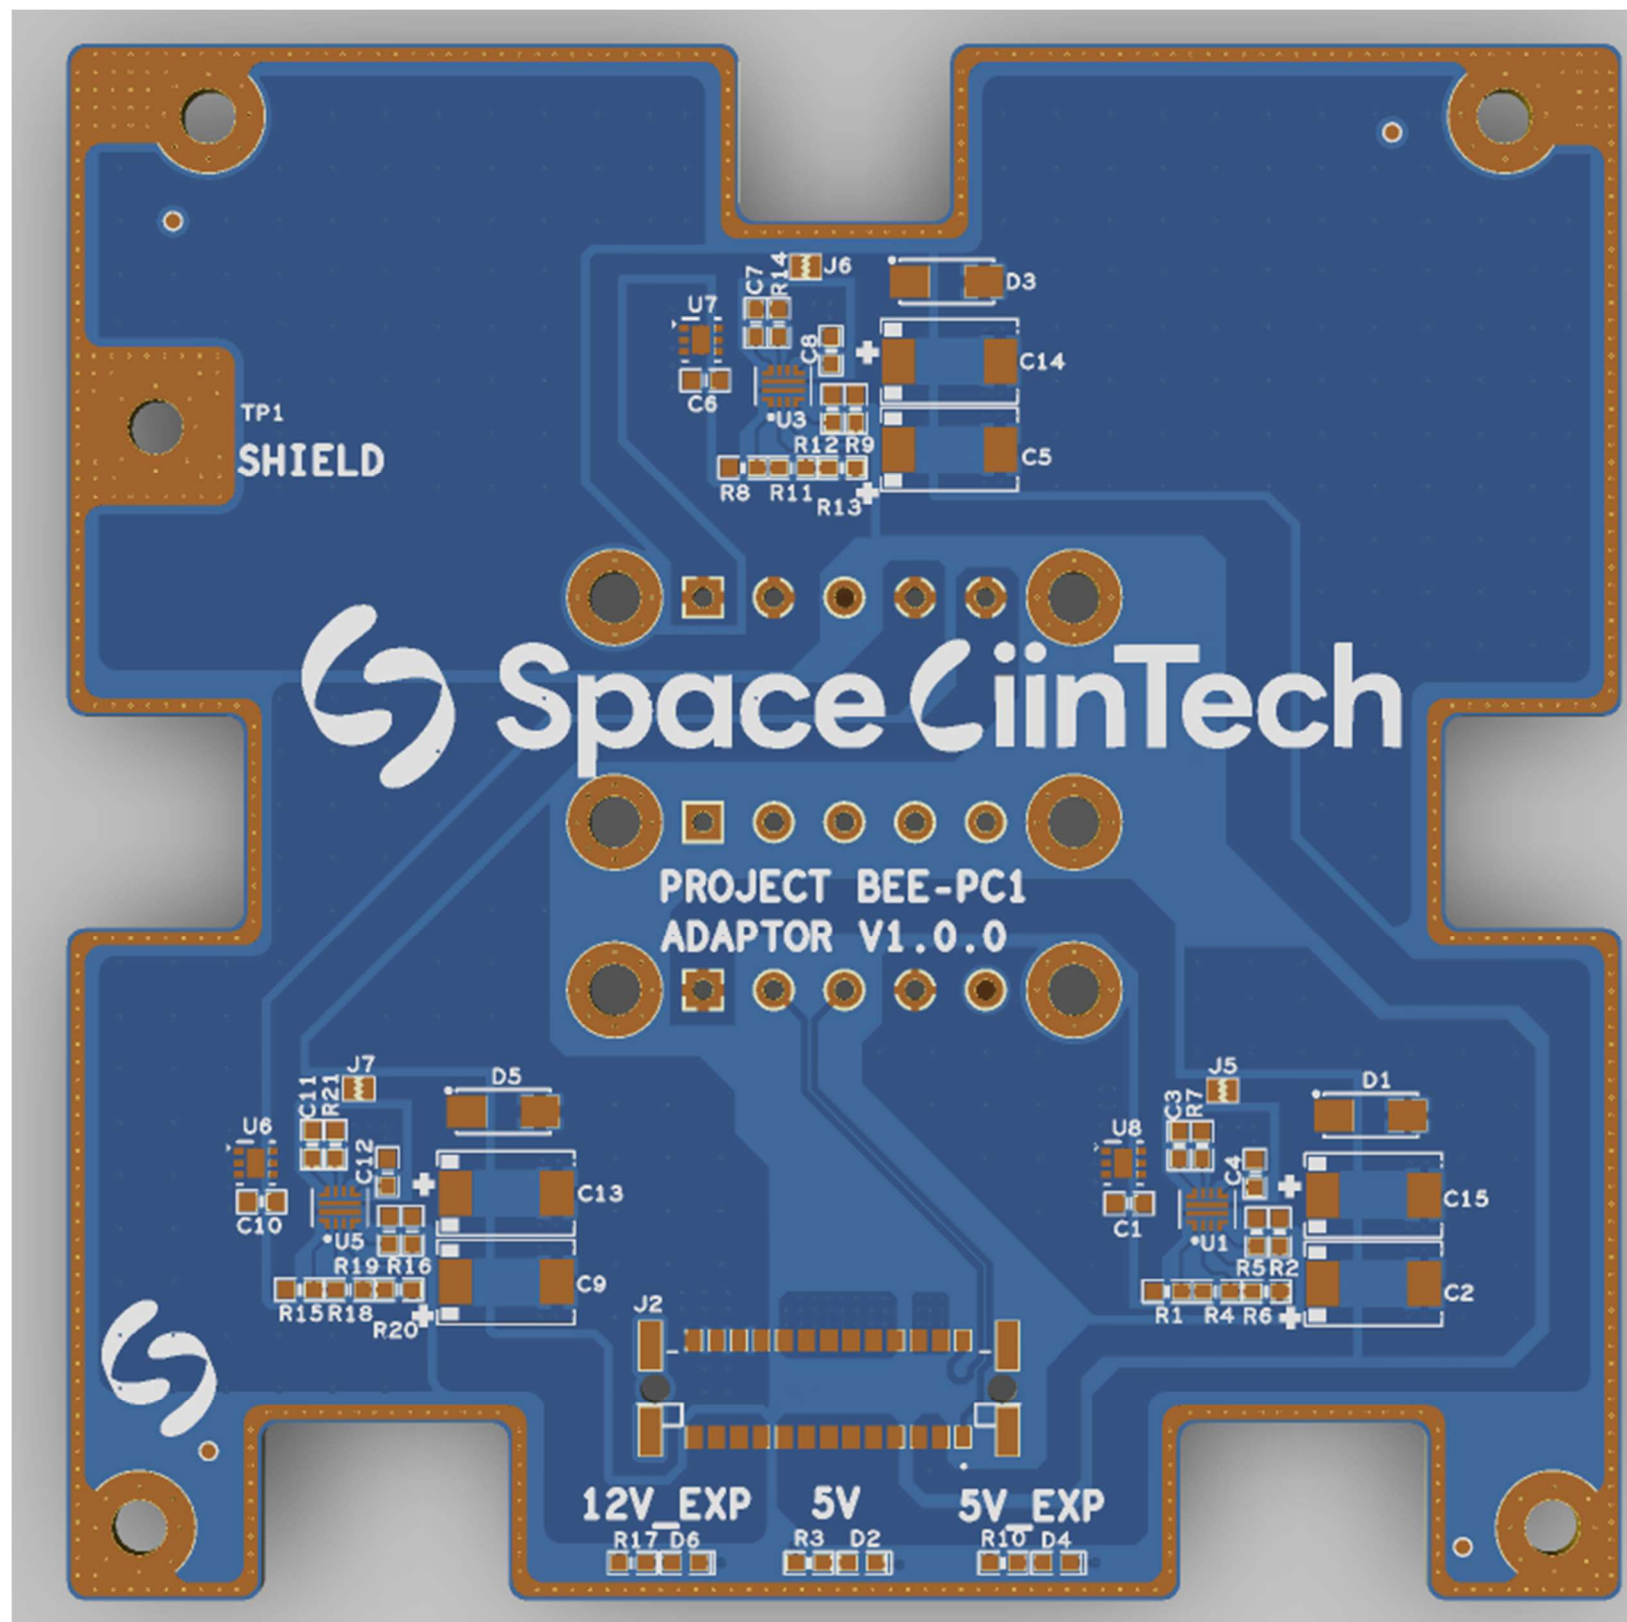

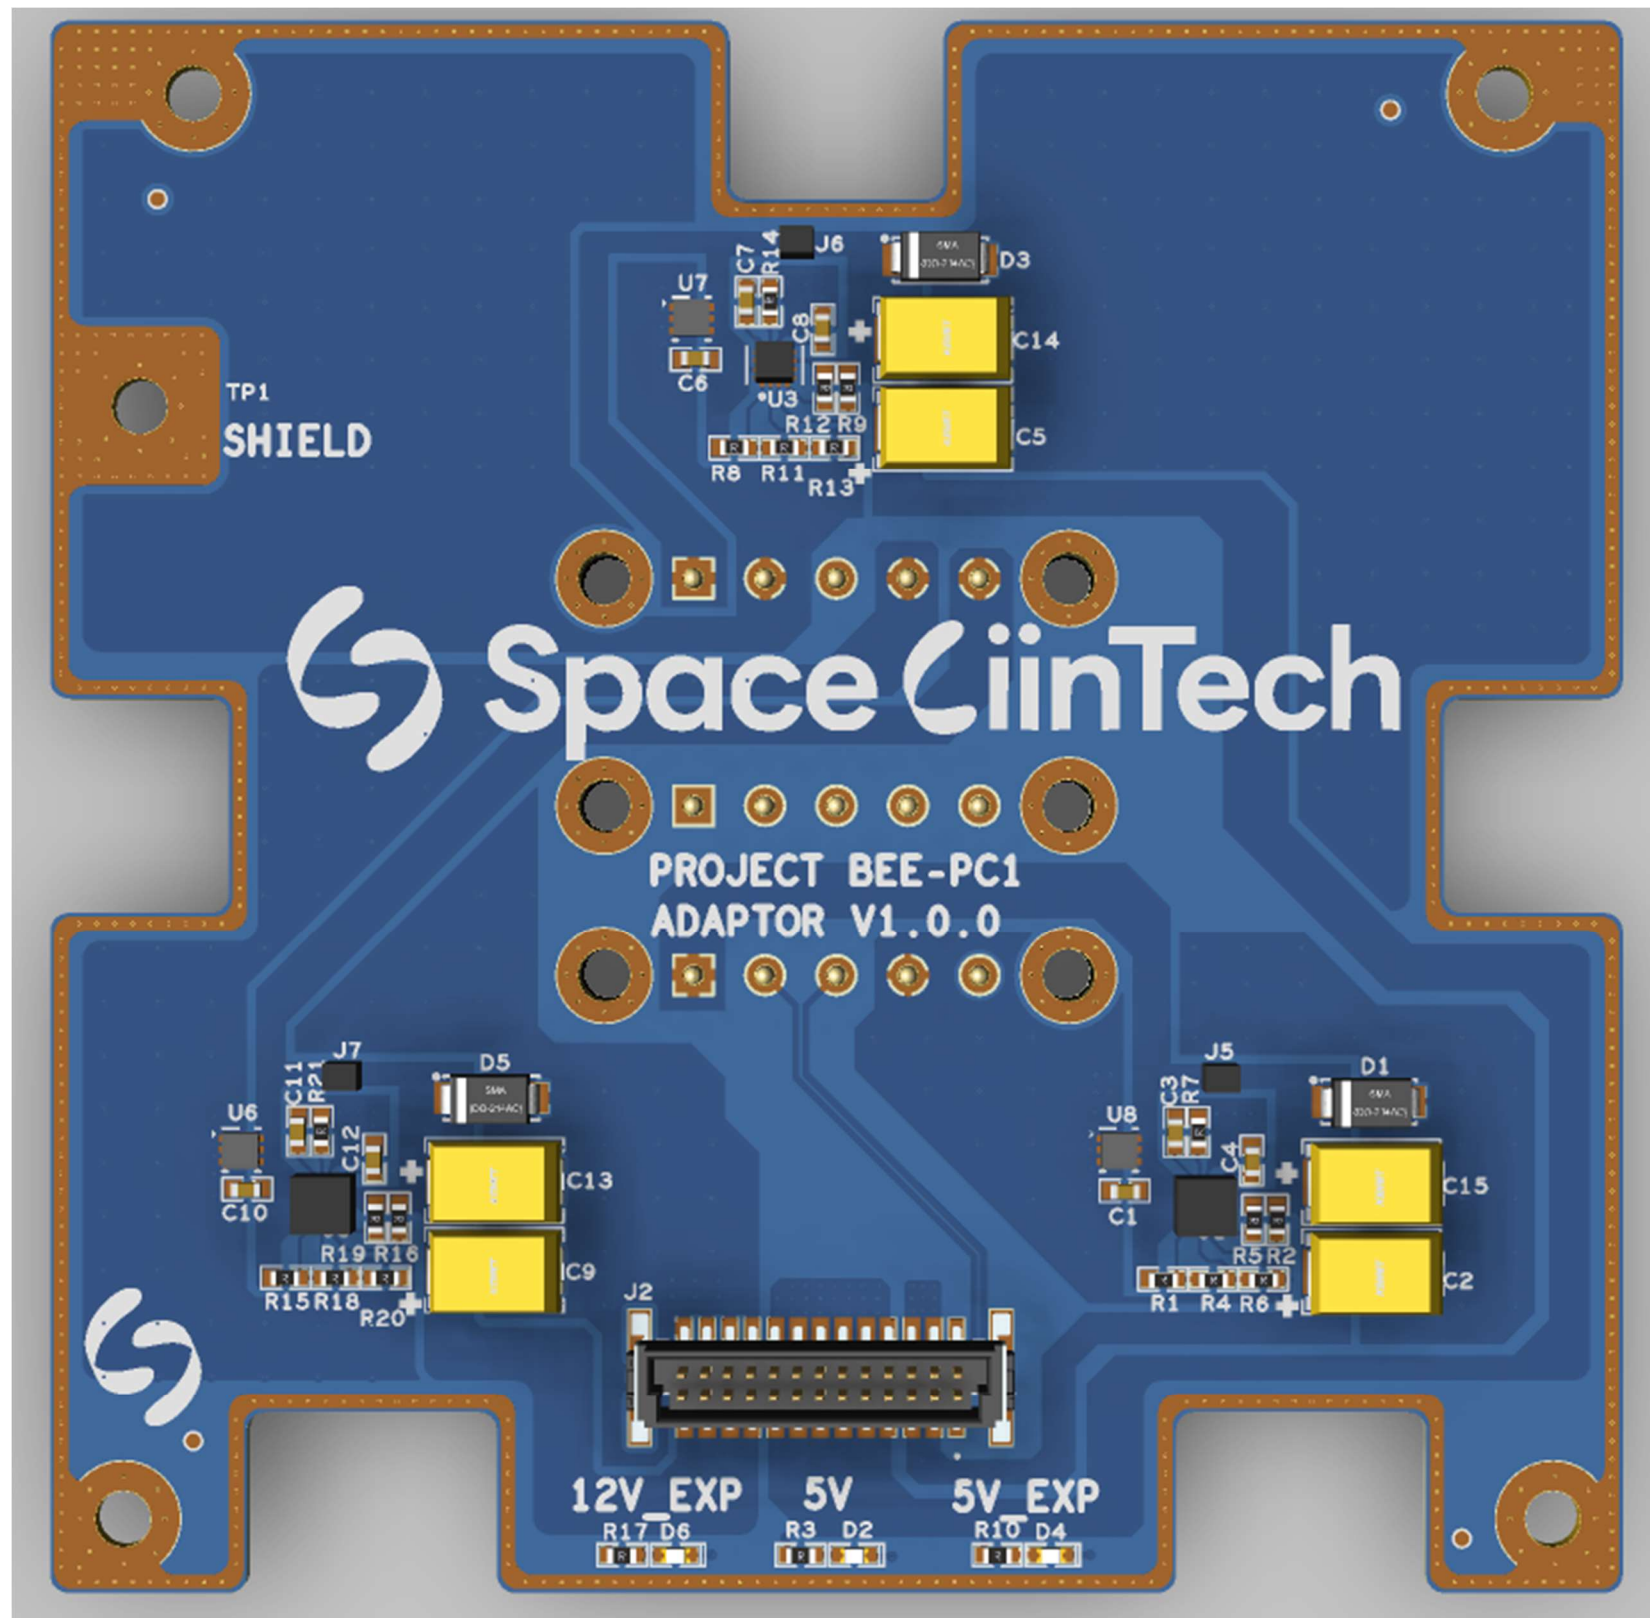

PROJECT BEE-PC1
ADAPTOR V1.0.0

J3



J4



J1





PROJECT BEE-PC1
ADAPTOR V1.0.0

J3

J4

J1

