

Table of Content

PAGE	COMPONENT/ FUNCTION
01	INDEX
02	BLOCK_DIAGRAM
03	COMMUNICATION
04	SWITCHING

NANORACK EXT LASER


Schematic V1.1.0



Project: BEE-PC1	Sub-system: NANORACK_LASER_EXT.PrjPcb	
Design by: Hung Nguyen D.	Sheet title: INDEX.SchDoc	Sheet 1 of 4
Checked by: Bao Bui Q.	Document No: 1	Size: A3
Approved by: Vu Pham	Revision: V1.2.1	Date: 5/25/2025


8 x LASERDIODE BOARD (OUTSIDE)

0532610871 - Molex

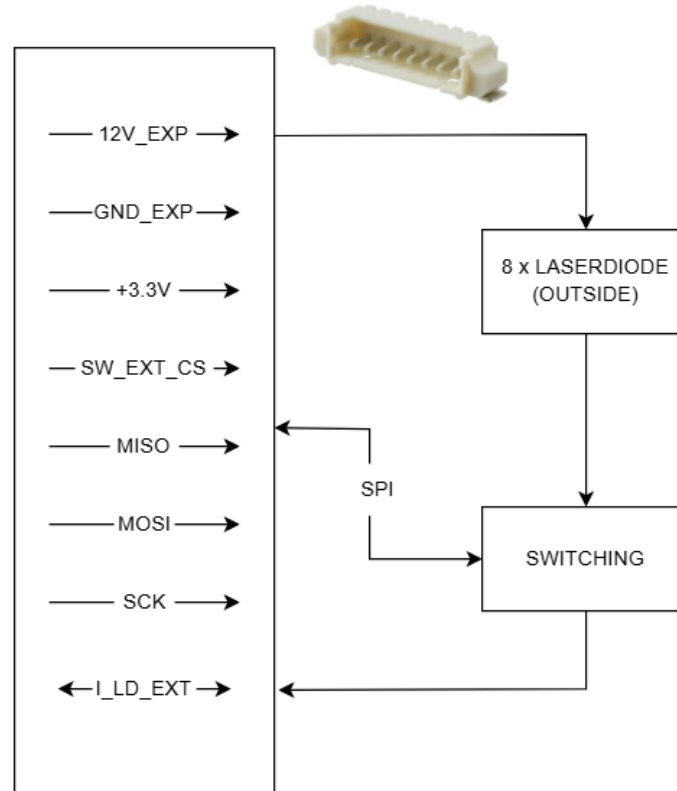


Project: BEE-PC1	Sub-system: NANORACK_LASER_EXT.PrjPcb	
Design by: Hung Nguyen D.	Sheet title: BLOCK_DIAGRAM.SchDoc	Sheet 2 of 4
Checked by: Bao Bui Q.	Document No: 2	Size: A3
Approved by: Vu Pham	Revision: V1.2.1	Date: 5/25/2025

LASER EXT CONNECTOR

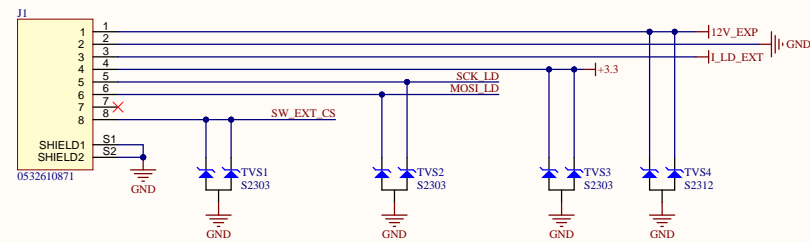

Molex - 0532610871

- ELECTRICAL:
CURRENT RATING: 1A/CONTACT
VOLTAGE RATING: 125V/CONTACT
- ENVIRONMENTAL:
TEMPERATURE RANGE: -40°C TO +105°C
- PHYSICAL:
PITCH-MATING: 0.049" (1.25mm)
- WIRE:
WIRE SIZE: 24 AWG
MAX CURRENT: 1A per Wire
ISULATION MATERIAL: PTFE
- MATING:
Molex - 0510210800



- MATING -



0510210800



Project: BEE-PC1	Sub-system: NANORACK_LASER_EXT.PrjPcb	
Design by: Hung Nguyen D.	Sheet title: COMMUNICATION.SchDoc	Sheet 3 of 4
Checked by: Bao Bui Q.	Document No: 3	Size: A3
Approved by: Vu Pham	Revision: V1.2.1	Date: 5/25/2025

