


Connector




PoC



+1.8V POWER SUPPLY

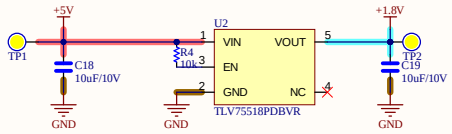

+3.3V POWER SUPPLY

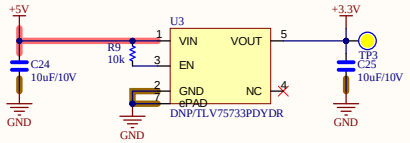

Serializer


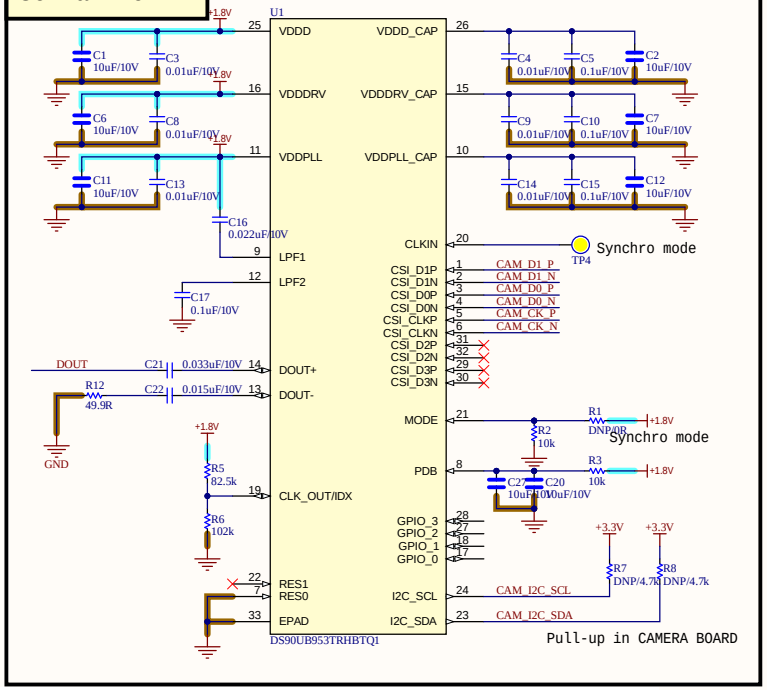



Table 6-11. IDX Configuration Setting

IDX	V_{TARGET} VOLTAGE RANGE			V_{IDX} TARGET VOLTAGE	SUGGESTED STRAP RESISTORS (1% TOL)		I2C 8-BIT ADDRESS	I2C 7-BIT ADDRESS	$V_{(I2C)}$ (I2C I/O VOLTAGE)
	RATIO MIN	RATIO TYP	RATIO MAX	V_{DD} = 1.8V	R_{HIGH} (kΩ)	R_{LOW} (kΩ)			
1	0	0	0.131 x $V_{(VDD18)}$	0	Open	40.2	0x30	0x18	1.8V
2	0.178 x $V_{(VDD18)}$	0.214 x $V_{(VDD18)}$	0.256 x $V_{(VDD18)}$	0.385	180	47.5	0x32	0x19	1.8V
3	0.537 x $V_{(VDD18)}$	0.564 x $V_{(VDD18)}$	0.591 x $V_{(VDD18)}$	1.015	82.5	102	0x30	0x18	3.3V
4	0.652 x $V_{(VDD18)}$	0.679 x $V_{(VDD18)}$	0.706 x $V_{(VDD18)}$	1.223	68.1	137	0x32	0x19	3.3V

to CAMERA




Mounting



SpaceTech

Project:	Sub-system:	
Design by: *	Sheet title: Serializer.SchDoc	Sheet 1 of 1
Checked by: *	Document No: 1	Size: A3
Approved by: *	Revision: *	Date: *

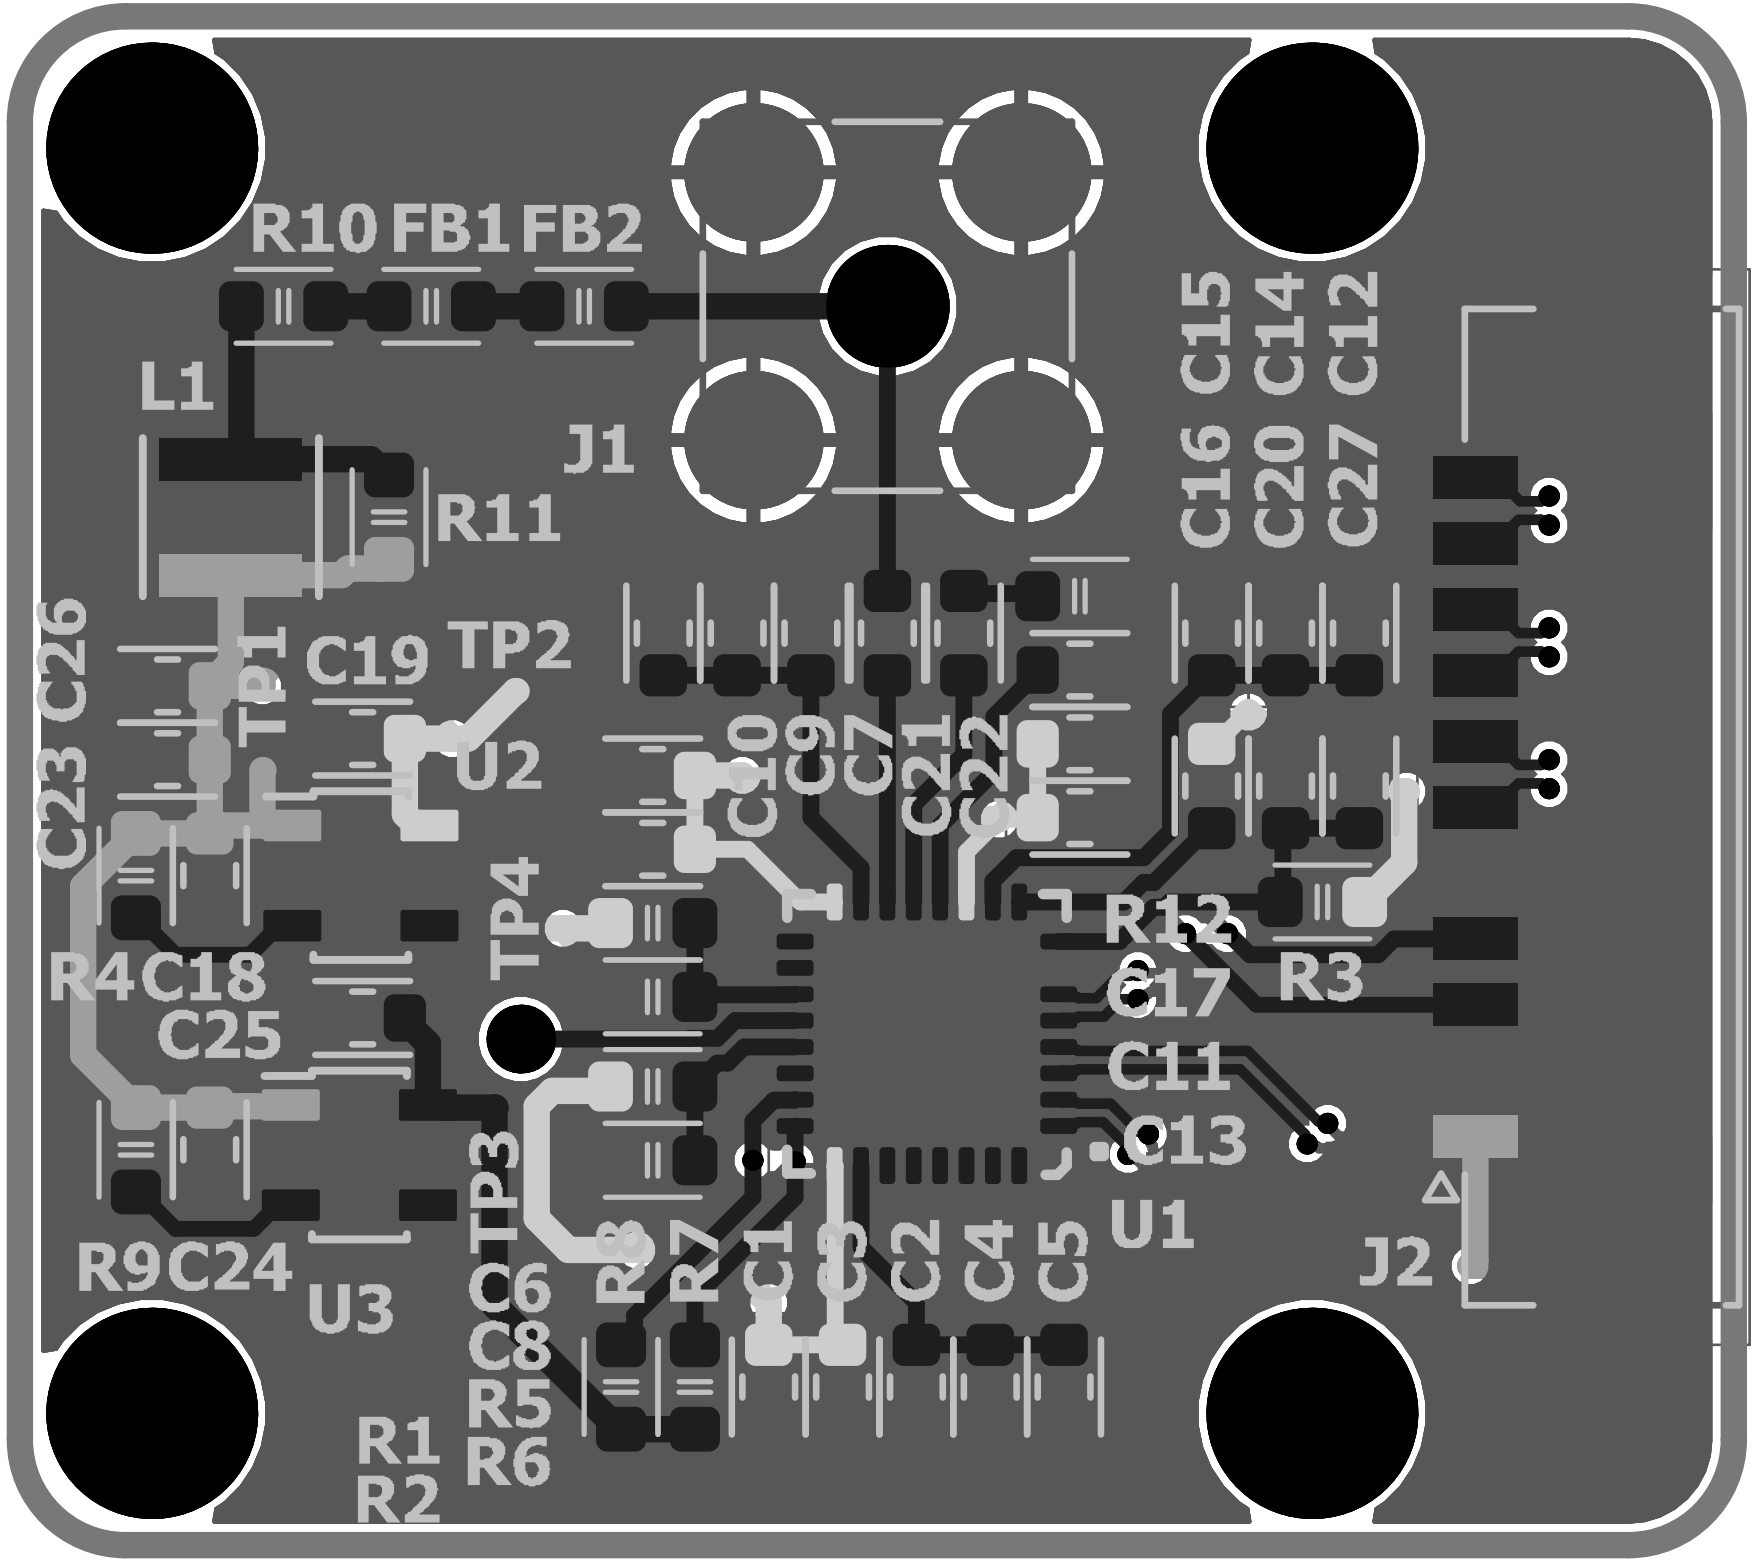
R10
FB1
FB2
L1
J1
R11
C16
C15
C14
C12
C20
C27
C26
TP1
C19
TP2
C23
U2
C10
C9
C7
C21
C22
TP4
R12
R4
C18
C17
R3
C25
C11
C13
TP3
U1
J2
R9
C24
U3
C6
R8
R7
C1
C3
C2
C4
C5
C8
R5
R1
R6
R2

Name	Description	Designator	Footprint	LibRef	Quantity
10uF/10V	CAP High Value	C1, C2, C6, C7, C11, C12, C18, C19, C20, C23, C24, C25, C27	CAP_C_1608X80	_CAP_C_High_2	13
0.01uF/10V	CAP	C3, C4, C8, C9, C13, C14	CAP_C_1608X80	_CAP_C_2	6
0.1uF/10V	CAP	C5, C10, C15, C17, C26	CAP_C_1608X80	_CAP_C_2	5
0.022uF/10V	CAP	C16	CAP_C_1608X80	_CAP_C_2	1
0.033uF/10V	CAP	C21	CAP_C_1608X80	_CAP_C_2	1
0.015uF/10V	CAP	C22	CAP_C_1608X80	_CAP_C_2	1
330R@100MHz	FERRITE BEAD 600 OHM 0603 1LN	FB1	IND_C_1608X60	BLM18AG601SN1D	1
47R@100MHz	FERRITE BEAD 600 OHM 0603 1LN	FB2	IND_C_1608X60	BLM18AG601SN1D	1
M2		H1, H2, H3, H4	HEX-2.2mm	HEX-M3	4
RFPC-SMA28-F	SMA Connector Jack, Female Socket 50 Ohms Panel Mount, Through Hole Solder	J1	GRADCONN_RFPC-SMA28-F	RFPC-SMA28-F	1
0532611171		J2	MOLEX_0532611171	Header 11x1_2M	1
10uH		L1	IND300X300X150	_IND	1
DNP/0R	RES	R1	RES_C_1608X60	_RES_B_2	1
10k	RES, RES-Chip	R2, R3, R4, R9	RES_C_1608X60	_RES_B_2, RES-SMD	4
82.5k	RES	R5	RES_C_1608X60	_RES_B_2	1
102k	RES	R6	RES_C_1608X60	_RES_B_2	1
DNP/4.7k	RES	R7, R8	RES_C_1608X60	_RES_B_2	2
0R	RES	R10	RES_C_1608X60	_RES_B_2	1
4.02k	RES	R11	RES_C_1608X60	_RES_B_2	1
49.9R	RES	R12	RES_C_1608X60	_RES_B_2	1
DS90UB953TRHBTQ1	2 MP MIPIÂ® CSI-2 FPD-Link III serializer for 2MP/60fps cameras & radar 32-VQFN -40 to 105	U1	QFN-32_5X5_EP3.7X3.7	IC_Serializer_DS90UB953TRHBTQ1	1
TLV75518PDBVR		U2	SOT25	IC_POWER_AP7347DQ	1
DNP/TLV75733PDYDR		U3	SOT25-EPAD	IC_POWER_TLV75733PDYDR	1